


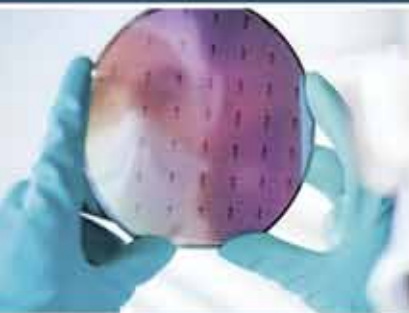

RediVac™ Vented,
Coated, Plated
and Cleaned
Fasteners for
Vacuum

UK
COMPONENTS


Fasteners and Seals for Science.

INCH

METRIC



NOMINAL SCREW HEAD DIMENSIONS FOR COMMON FASTENERS

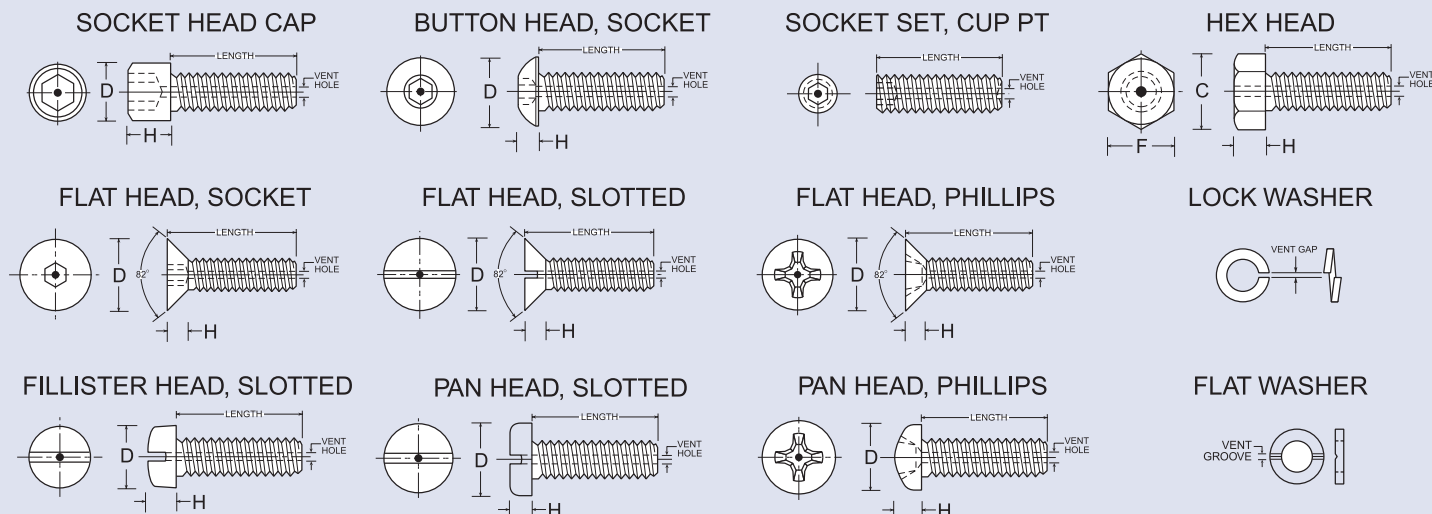

Contact UC Components for head types not represented here as well as specific tolerance and finish details.

ENGLISH SIZES - DIMENSIONS IN INCHES

SIZE /DIA	SOCKET HEAD		BUTTON HEAD SOCKET		HEX HEAD			FLAT HEAD SOCKET		FLAT HEAD PHILLIPS, SLOTTED		FILLISTER HEAD SLOTTED		PAN HEAD SLOTTED		PAN HEAD PHILLIPS	
	D	H	D	H	C	F	H	D	H	D	H	D	H	D	H	D	H
#2	.140	.086	.164	.046	.134	.125	.050	.197	.064	.172	.051	.140	.083	.167	.053	.167	.062
#4	.183	.112	.213	.059	.202	.188	.060	.255	.083	.225	.067	.183	.107	.219	.068	.219	.080
#5	.205	.125	.238	.066	.202	.188	.070	.281	.090	.252	.075	.205	.120	.245	.075	.245	.089
#6	.226	.138	.262	.073	.272	.250	.093	.307	.097	.279	.083	.226	.132	.270	.082	.270	.097
#8	.270	.164	.312	.087	.272	.250	.110	.359	.112	.332	.100	.270	.156	.322	.096	.322	.115
#10	.312	.190	.361	.101	.340	.312	.120	.411	.127	.385	.116	.313	.180	.373	.110	.373	.133
1/4	.375	.250	.437	.132	.505	.438	.188	.531	.161	.507	.153	.414	.237	.492	.144	.492	.175
5/16	.469	.312	.547	.166	.577	.500	.235	.656	.198	.635	.191	.518	.295	.615	.178	.615	.218
3/8	.562	.375	.656	.199	.650	.562	.268	.781	.234	.762	.230	.622	.355	.740	.212	.740	.261

* Dimensions listed above are for reference only. Contact UC Components for dimensions and types not listed here as well as for specific tolerances and details.

DECIMAL EQUIVALENTS For Fractions

1/64 0.015625	17/64 0.265625	33/64 0.515625	49/64 0.765625
1/32 0.031250	9/32 0.281250	17/32 0.531250	25/32 0.781250
3/64 0.046875	19/64 0.296875	35/64 0.546875	51/64 0.796875
1/16 0.062500	5/16 0.312500	9/16 0.562500	13/16 0.812500
5/64 0.078125	21/64 0.328125	37/64 0.578125	53/64 0.828125
3/32 0.093750	11/32 0.343750	19/32 0.593750	27/32 0.843750
7/64 0.109375	23/64 0.359375	39/64 0.609375	55/64 0.859375
1/8 0.125000	3/8 0.375000	5/8 0.625000	7/8 0.875000
9/64 0.140625	25/64 0.390625	41/64 0.640625	57/64 0.890625
5/32 0.156250	13/32 0.406250	21/32 0.656250	29/32 0.906250
11/64 0.171875	27/64 0.421875	43/64 0.671875	59/64 0.921875
3/16 0.187500	7/16 0.437500	11/16 0.687500	15/16 0.937500
3/64 0.203125	29/64 0.453125	45/64 0.703125	61/64 0.953125
7/32 0.218750	15/32 0.468750	23/32 0.718750	31/32 0.968750
5/64 0.234375	31/64 0.484375	47/64 0.734375	63/64 0.984375
1/4 0.250000	1/2 0.500000	3/4 0.750000	1 1.000000



Items in This Catalog

This catalog contains the standard fastener product range offered by UC Components. UC Components carries many additional lengths and diameters as well as other materials. New products are added to our portfolio daily based on the demands of our customer base. Please contact sales@uccomponents.com if you do not see the item you are looking for.

Special and Custom Items

UC Components carries a wide variety of specialty items including but not limited to the following. Contact UC by phone, fax, or email if you don't see what you need:

- | | |
|----------------------------------|---|
| Vented and Non-Vented Dowel Pins | Captivated Fasteners |
| Wire Hole Drilling | Custom Vented and Turned Fasteners to Print |

RediVac™ Cleaned and Vacuum-Baked Fluoroelastomer O-Rings

Contact sales@uccomponents.com to request your separate o-ring catalog for reduced outgassing and resulting faster pump-down times in your vacuum system!

Special Materials and Finishes

In addition to 18-8 / A2-70 Stainless Steel, UC Components works most extensively with 316 and A4-70 Stainless Steels, which are available in virtually every size in this catalog. In addition, UC works with the following materials and finishes on a case-by-case basis:

- | | |
|--|---------------|
| Titanium (Grade 2, 5) | Inconel® |
| Aluminum (2024, 6061) | Hastelloy® |
| Nickel 200 | Brass |
| Nitronic 60® | Nylon |
| PTFE | Alloy Steel |
| Nickel-Teflon Coating | Kolsterising® |
| Nylok® Blue® Nylon Torq-Patch®, Pellet®, or Strip® | Nytemp® Patch |

Cleaning and Packaging

UC Components RediVac™ Products all go through a multi-stage, heated, de-ionized aqueous cleaning process prior to final packaging. Standard packaging consists of a single Class-100 bag, nitrogen purged and vacuum sealed to minimize particulate generation during transit. All cleaning and packaging performed within UC Components Certified Class-100 Cleanroom. Double-bagging, custom labeling, bar-coding, and kitting are available.





ENGINEERING, DESIGN AND USAGE PRECAUTIONS RELATING TO HIGH VACUUM FASTENERS

The operation of high vacuum manufacturing equipment presents a number of detailed and complicated engineering challenges. This section is designed to highlight some of those challenges as they relate to UC Components' products.

WHY A VENTED SCREW?

UC Components RediVac™ Vented Screws provide a path for trapped air to escape and be pumped away from the bottom and sides of a blind-tapped hole. This allows for faster and more thorough pump-down of a vacuum system and the elimination of "virtual leaks". This trapped air also represents potential contamination to a system under vacuum. Faster pump-down and the elimination of contamination result in higher throughput and improved yield.

PRECISION CLEANED FASTENERS AND GALLING

All of UC Components catalog parts are shipped Precision Cleaned and Class 100 Packaged, ready for vacuum service for most applications. However, Precision Cleaned parts can present a galling problem making removal of the fastener extremely difficult and causing unnecessary downtime. To reduce the threat of galling UC Components offers a number of solutions that are vacuum stable including WS2 and MoS2 Coatings as well as Ag and Au Platings.

LUBRICATION AND TORQUE VALUES

Torque value is primarily dependent on friction produced by both the threads and the material contact with the fastener head. The addition of lubrication, coating or plating will reduce the coefficient of friction resulting in a higher tension or clamping force for a given torque. The word of caution is that the tensile strength of a fastener can be exceeded without exceeding its' maximum recommended torque.

USING A SCREW TWICE

When tightening down a screw, small stress fractures occur. Removal of the fastener causes additional stress. With repeated use a fastener will eventually fail. In addition, many vacuum processes leave behind material which adheres to the fastener, can build up and flake off presenting potential particulate contamination and subsequently reduced yield. The savings experienced from screw re-use are often not worth the ramifications of screw failure.

For additional questions and technical assistance, please email sales@uccomponents.com or phone 408-782-1929.



TERMS AND CONDITIONS

Standard domestic order payment terms are 3% 10 net 30 days.

MINIMUM ORDER

Minimum order size is \$20 and \$5 per line item. There is also a 10 piece per line item minimum.

EXPORT ORDERS

Minimum order size for export is \$50.

Export orders paid by wire transfer are subject to a \$25 wire fee billed as a line item.
Export orders exceeding \$500 will have the wire fee waived.

Unless otherwise specified, freight charges are pre-paid and added to invoice. Duties and taxes are billed collect to the recipient.

UC COMPONENTS ACCEPTS VISA, MASTERCARD, AND AMERICAN EXPRESS

Prices are subject to change without notice.

Not responsible for typographical or printing errors.

SHIPMENTS

Domestic shipments are made via Federal Express or UPS unless otherwise specified at the time of order. Additional handling charges may apply to orders not shipped via Federal Express or UPS.

Shortages, returns, and customer claims must be made within 10 days of receipt. No returns will be accepted without prior authorization.






All terms and conditions are subject to change without notice.

For additional questions and technical assistance, please email sales@uccomponents.com or phone 408-782-1929.










TABLE OF CONTENTS

VENTED SCREWS








	Button Head, Socket Drive..... I-2
	Socket Head Cap..... I-3/I-5
	Flat Head, Phillips Drive I-6
	Flat Head, Socket Drive I-7
	Flat Head, Slotted Drive I-8
	Hex Head I-9
	Set, Cup Point, Socket Drive..... I-10
	Fillister Head, Slotted Drive I-11
	Pan Head, Phillips Drive..... I-12
	Pan Head, Slotted Drive I-13
	Shoulder, Socket Drive I-14

SLOT-VENTED SCREWS

	Button Head, Socket Drive..... I-16
	Socket Head Cap..... I-17/I-18
	Flat Head, Phillips Drive I-19
	Flat Head, Socket Drive I-20
	Slotted Flat Head I-21
	Hex Head I-22
	Set, Cup Point, Socket Drive..... I-23

	Fillister Head, Slotted Drive I-24
	Pan Head, Phillips Drive..... I-25
	Pan Head, Slotted Drive I-26

NON VENTED SCREWS

	Button Head, Socket Drive..... I-28
	Socket Head Cap..... I-29/I-31
	Flat Head, Phillips Drive I-32
	Flat Head, Socket Drive I-33
	Flat Head, Slotted Drive I-34
	Hex Head I-35
	Set, Cup Point, Socket Drive..... I-36
	Fillister Head, Slotted Drive..... I-37
	Pan Head, Phillips Drive..... I-38
	Pan Head, Slotted Drive I-39
	Flange, Twelve Point Head I-40

NUTS

	Nut, Hex..... I-42
---	--------------------

WASHERS

	Flat I-44
	Split Lock..... I-45
	Vented Washer, Flat I-48



VENTED SCREWS



18700 Adams Ct. Morgan Hill, CA 95037
Phone: 408.782.1929 | Fax: 408.782.7995
Email: sales@uccomponents.com
www.uccomponents.com

INCH

Vented Screw, Button Head, Socket Drive


ASME B18.3 / 18-8 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
BU-202-__	#2-56	0.086	1/8
BU-203-__	#2-56	0.086	3/16
BU-204-__	#2-56	0.086	1/4
BU-205-__	#2-56	0.086	5/16
BU-206-__	#2-56	0.086	3/8
BU-207-__	#2-56	0.086	7/16
BU-208-__	#2-56	0.086	1/2
BU-210-__	#2-56	0.086	5/8
BU-212-__	#2-56	0.086	3/4
BU-402-__	#4-40	0.112	1/8
BU-403-__	#4-40	0.112	3/16
BU-404-__	#4-40	0.112	1/4
BU-405-__	#4-40	0.112	5/16
BU-406-__	#4-40	0.112	3/8
BU-407-__	#4-40	0.112	7/16
BU-408-__	#4-40	0.112	1/2
BU-410-__	#4-40	0.112	5/8
BU-412-__	#4-40	0.112	3/4
BU-603-__	#6-32	0.138	3/16
BU-604-__	#6-32	0.138	1/4
BU-605-__	#6-32	0.138	5/16
BU-606-__	#6-32	0.138	3/8
BU-607-__	#6-32	0.138	7/16
BU-608-__	#6-32	0.138	1/2
BU-610-__	#6-32	0.138	5/8
BU-612-__	#6-32	0.138	3/4
BU-614-__	#6-32	0.138	7/8
BU-616-__	#6-32	0.138	1
BU-804-__	#8-32	0.164	1/4
BU-805-__	#8-32	0.164	5/16
BU-806-__	#8-32	0.164	3/8
BU-807-__	#8-32	0.164	7/16
BU-808-__	#8-32	0.164	1/2
BU-810-__	#8-32	0.164	5/8
BU-812-__	#8-32	0.164	3/4
BU-814-__	#8-32	0.164	7/8
BU-816-__	#8-32	0.164	1
BU-820-__	#8-32	0.164	1 1/4
BU-1004-__	#10-32	0.190	1/4
BU-1005-__	#10-32	0.190	5/16
BU-1006-__	#10-32	0.190	3/8
BU-1007-__	#10-32	0.190	7/16

Part Number	Size	Dia	Length
BU-1008-__	#10-32	0.190	1/2
BU-1010-__	#10-32	0.190	5/8
BU-1012-__	#10-32	0.190	3/4
BU-1014-__	#10-32	0.190	7/8
BU-1016-__	#10-32	0.190	1
BU-1018-__	#10-32	0.190	1 1/8
BU-1020-__	#10-32	0.190	1 1/4
BU-1024-__	#10-32	0.190	1 1/2
BU-2004-__	1/4-20	0.250	1/4
BU-2006-__	1/4-20	0.250	3/8
BU-2008-__	1/4-20	0.250	1/2
BU-2010-__	1/4-20	0.250	5/8
BU-2012-__	1/4-20	0.250	3/4
BU-2014-__	1/4-20	0.250	7/8
BU-2016-__	1/4-20	0.250	1
BU-2018-__	1/4-20	0.250	1 1/8
BU-2020-__	1/4-20	0.250	1 1/4
BU-2024-__	1/4-20	0.250	1 1/2



For detailed prints, tolerances, and variations
please email sales@ucomponents.com

Vented Screw, Socket Head Cap

ASME B18.3 / 18-8 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned
(No-suffix)

Silver plated
-A

Gold plated
-AU

Nickel plated
-K


MoS2 coated
-C

WS2 coated
-W

Electro Polished
-EP

Part Number	Size	Dia	Length
C-202-__	#2-56	0.086	1/8
C-203-__	#2-56	0.086	3/16
C-204-__	#2-56	0.086	1/4
C-205-__	#2-56	0.086	5/16
C-206-__	#2-56	0.086	3/8
C-207-__	#2-56	0.086	7/16
C-208-__	#2-56	0.086	1/2
C-210-__	#2-56	0.086	5/8
C-212-__	#2-56	0.086	3/4
C-402-__	#4-40	0.112	1/8
C-403-__	#4-40	0.112	3/16
C-404-__	#4-40	0.112	1/4
C-405-__	#4-40	0.112	5/16
C-406-__	#4-40	0.112	3/8
C-407-__	#4-40	0.112	7/16
C-408-__	#4-40	0.112	1/2
C-410-__	#4-40	0.112	5/8
C-412-__	#4-40	0.112	3/4
C-414-__	#4-40	0.112	7/8
C-416-__	#4-40	0.112	1
C-508-__	#5-40	0.125	1/2
C-504-__	#5-40	0.125	1/4
C-512-__	#5-40	0.125	3/4
C-505-__	#5-40	0.125	5/16
C-506-__	#5-40	0.125	3/8
C-510-__	#5-40	0.125	5/8
C-514-__	#5-40	0.125	7/8
C-516-__	#5-40	0.125	1
C-602-__	#6-32	0.138	1/8
C-603-__	#6-32	0.138	3/16
C-604-__	#6-32	0.138	1/4
C-605-__	#6-32	0.138	5/16
C-606-__	#6-32	0.138	3/8
C-607-__	#6-32	0.138	7/16
C-608-__	#6-32	0.138	1/2
C-609-__	#6-32	0.138	9/16
C-610-__	#6-32	0.138	5/8
C-612-__	#6-32	0.138	3/4
C-614-__	#6-32	0.138	7/8
C-616-__	#6-32	0.138	1
C-618-__	#6-32	0.138	1 1/8
C-620-__	#6-32	0.138	1 1/4

Part Number	Size	Dia	Length
C-803-__	#8-32	0.164	3/16
C-804-__	#8-32	0.164	1/4
C-805-__	#8-32	0.164	5/16
C-806-__	#8-32	0.164	3/8
C-807-__	#8-32	0.164	7/16
C-808-__	#8-32	0.164	1/2
C-809-__	#8-32	0.164	9/16
C-810-__	#8-32	0.164	5/8
C-812-__	#8-32	0.164	3/4
C-814-__	#8-32	0.164	7/8
C-816-__	#8-32	0.164	1
C-818-__	#8-32	0.164	1 1/8
C-820-__	#8-32	0.164	1 1/4
C-824-__	#8-32	0.164	1 1/2
C-832-__	#8-32	0.164	2



For detailed prints, tolerances, and variations
please email sales@ucomponents.com

Vented Screw, Socket Head Cap


ASME B18.3 / 18-8 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
C-2404-__	#10-24	0.190	1/4
C-2406-__	#10-24	0.190	3/8
C-2408-__	#10-24	0.190	1/2
C-2410-__	#10-24	0.190	5/8
C-2412-__	#10-24	0.190	3/4
C-2414-__	#10-24	0.190	7/8
C-2416-__	#10-24	0.190	1
C-2418-__	#10-24	0.190	1 1/8
C-2420-__	#10-24	0.190	1 1/4
C-2422-__	#10-24	0.190	1 3/8
C-2424-__	#10-24	0.190	1 1/2
C-1003-__	#10-32	0.190	3/16
C-1004-__	#10-32	0.190	1/4
C-1005-__	#10-32	0.190	5/16
C-1006-__	#10-32	0.190	3/8
C-1007-__	#10-32	0.190	7/16
C-1008-__	#10-32	0.190	1/2
C-1009-__	#10-32	0.190	9/16
C-1010-__	#10-32	0.190	5/8
C-1011-__	#10-32	0.190	11/16
C-1012-__	#10-32	0.190	3/4
C-1014-__	#10-32	0.190	7/8
C-1016-__	#10-32	0.190	1
C-1018-__	#10-32	0.190	1 1/8
C-1020-__	#10-32	0.190	1 1/4
C-1022-__	#10-32	0.190	1 3/8
C-1024-__	#10-32	0.190	1 1/2
C-1026-__	#10-32	0.190	1 5/8
C-1028-__	#10-32	0.190	1 3/4
C-1032-__	#10-32	0.190	2
C-2004-__	1/4-20	0.250	1/4
C-2005-__	1/4-20	0.250	5/16
C-2006-__	1/4-20	0.250	3/8
C-2008-__	1/4-20	0.250	1/2
C-2010-__	1/4-20	0.250	5/8
C-2012-__	1/4-20	0.250	3/4
C-2014-__	1/4-20	0.250	7/8
C-2016-__	1/4-20	0.250	1
C-2018-__	1/4-20	0.250	1 1/8
C-2020-__	1/4-20	0.250	1 1/4
C-2022-__	1/4-20	0.250	1 3/8
C-2024-__	1/4-20	0.250	1 1/2

Part Number	Size	Dia	Length
C-2026-__	1/4-20	0.250	1 5/8
C-2028-__	1/4-20	0.250	1 3/4
C-2032-__	1/4-20	0.250	2
C-2040-__	1/4-20	0.250	2 1/2
C-2814-__	1/4-28	0.250	7/8
C-2806-__	1/4-28	0.250	3/8
C-2808-__	1/4-28	0.250	1/2
C-2810-__	1/4-28	0.250	5/8
C-2812-__	1/4-28	0.250	3/4
C-2816-__	1/4-28	0.250	1
C-2820-__	1/4-28	0.250	1 1/4
C-2824-__	1/4-28	0.250	1 1/2



For detailed prints, tolerances, and variations
please email sales@ucomponents.com

Vented Screw, Socket Head Cap


ASME B18.3 / 18-8 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
C-1808-__	5/16-18	0.313	1/2
C-1810-__	5/16-18	0.313	5/8
C-1812-__	5/16-18	0.313	3/4
C-1814-__	5/16-18	0.313	7/8
C-1816-__	5/16-18	0.313	1
C-1820-__	5/16-18	0.313	1 1/4
C-1824-__	5/16-18	0.313	1 1/2
C-1828-__	5/16-18	0.313	1 3/4
C-1832-__	5/16-18	0.313	2
C-3108-__	5/16-24	0.313	1/2
C-3110-__	5/16-24	0.313	5/8
C-3112-__	5/16-24	0.313	3/4
C-3114-__	5/16-24	0.313	7/8
C-3116-__	5/16-24	0.313	1
C-3120-__	5/16-24	0.313	1 1/4
C-3124-__	5/16-24	0.313	1 1/2
C-3128-__	5/16-24	0.313	1 3/4
C-3132-__	5/16-24	0.313	2
C-1608-__	3/8-16	0.375	1/2
C-1610-__	3/8-16	0.375	5/8
C-1612-__	3/8-16	0.375	3/4
C-1614-__	3/8-16	0.375	7/8
C-1616-__	3/8-16	0.375	1
C-1620-__	3/8-16	0.375	1 1/4
C-1624-__	3/8-16	0.375	1 1/2
C-1628-__	3/8-16	0.375	1 3/4
C-1632-__	3/8-16	0.375	2
C-3808-__	3/8-24	0.375	1/2
C-3810-__	3/8-24	0.375	5/8
C-3812-__	3/8-24	0.375	3/4
C-3814-__	3/8-24	0.375	7/8
C-3816-__	3/8-24	0.375	1
C-3820-__	3/8-24	0.375	1 1/4
C-3824-__	3/8-24	0.375	1 1/2
C-3828-__	3/8-24	0.375	1 3/4
C-3832-__	3/8-24	0.375	2
C-1312-__	1/2-13	0.500	3/4
C-1316-__	1/2-13	0.500	1
C-1320-__	1/2-13	0.500	1 1/4
C-1324-__	1/2-13	0.500	1 1/2

Part Number	Size	Dia	Length
C-1326-__	1/2-13	0.500	1 5/8
C-1328-__	1/2-13	0.500	1 3/4
C-1332-__	1/2-13	0.500	2



For detailed prints, tolerances, and variations
please email sales@ucomponents.com

Vented Screw, Flat Head, Phillips Drive


ASME B18.6.3 / 18-8 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
F-202-__	#2-56	0.086	1/8
F-203-__	#2-56	0.086	3/16
F-204-__	#2-56	0.086	1/4
F-205-__	#2-56	0.086	5/16
F-206-__	#2-56	0.086	3/8
F-207-__	#2-56	0.086	7/16
F-208-__	#2-56	0.086	1/2
F-210-__	#2-56	0.086	5/8
F-212-__	#2-56	0.086	3/4
F-402-__	#4-40	0.112	1/8
F-403-__	#4-40	0.112	3/16
F-404-__	#4-40	0.112	1/4
F-405-__	#4-40	0.112	5/16
F-406-__	#4-40	0.112	3/8
F-407-__	#4-40	0.112	7/16
F-408-__	#4-40	0.112	1/2
F-410-__	#4-40	0.112	5/8
F-412-__	#4-40	0.112	3/4
F-603-__	#6-32	0.138	3/16
F-604-__	#6-32	0.138	1/4
F-605-__	#6-32	0.138	5/16
F-606-__	#6-32	0.138	3/8
F-607-__	#6-32	0.138	7/16
F-608-__	#6-32	0.138	1/2
F-610-__	#6-32	0.138	5/8
F-612-__	#6-32	0.138	3/4
F-614-__	#6-32	0.138	7/8
F-616-__	#6-32	0.138	1
F-804-__	#8-32	0.164	1/4
F-805-__	#8-32	0.164	5/16
F-806-__	#8-32	0.164	3/8
F-807-__	#8-32	0.164	7/16
F-808-__	#8-32	0.164	1/2
F-810-__	#8-32	0.164	5/8
F-812-__	#8-32	0.164	3/4
F-814-__	#8-32	0.164	7/8
F-816-__	#8-32	0.164	1
F-820-__	#8-32	0.164	1 1/4
F-1004-__	#10-32	0.190	1/4
F-1005-__	#10-32	0.190	5/16
F-1006-__	#10-32	0.190	3/8
F-1007-__	#10-32	0.190	7/16

Part Number	Size	Dia	Length
F-1008-__	#10-32	0.190	1/2
F-1010-__	#10-32	0.190	5/8
F-1012-__	#10-32	0.190	3/4
F-1014-__	#10-32	0.190	7/8
F-1016-__	#10-32	0.190	1
F-1018-__	#10-32	0.190	1 1/8
F-1020-__	#10-32	0.190	1 1/4
F-1024-__	#10-32	0.190	1 1/2
F-2004-__	1/4-20	0.250	1/4
F-2006-__	1/4-20	0.250	3/8
F-2008-__	1/4-20	0.250	1/2
F-2010-__	1/4-20	0.250	5/8
F-2012-__	1/4-20	0.250	3/4
F-2014-__	1/4-20	0.250	7/8
F-2016-__	1/4-20	0.250	1
F-2018-__	1/4-20	0.250	1 1/8
F-2020-__	1/4-20	0.250	1 1/4
F-2024-__	1/4-20	0.250	1 1/2

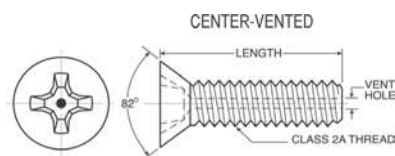

For detailed prints, tolerances, and variations
please email sales@ucomponents.com

Vented Screw, Flat Head, Socket Drive


ASME B18.3 / 18-8 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
FA-202-__	#2-56	0.086	1/8
FA-203-__	#2-56	0.086	3/16
FA-204-__	#2-56	0.086	1/4
FA-205-__	#2-56	0.086	5/16
FA-206-__	#2-56	0.086	3/8
FA-207-__	#2-56	0.086	7/16
FA-208-__	#2-56	0.086	1/2
FA-210-__	#2-56	0.086	5/8
FA-212-__	#2-56	0.086	3/4
FA-402-__	#4-40	0.112	1/8
FA-403-__	#4-40	0.112	3/16
FA-404-__	#4-40	0.112	1/4
FA-405-__	#4-40	0.112	5/16
FA-406-__	#4-40	0.112	3/8
FA-407-__	#4-40	0.112	7/16
FA-408-__	#4-40	0.112	1/2
FA-410-__	#4-40	0.112	5/8
FA-412-__	#4-40	0.112	3/4
FA-603-__	#6-32	0.138	3/16
FA-604-__	#6-32	0.138	1/4
FA-605-__	#6-32	0.138	5/16
FA-606-__	#6-32	0.138	3/8
FA-607-__	#6-32	0.138	7/16
FA-608-__	#6-32	0.138	1/2
FA-610-__	#6-32	0.138	5/8
FA-612-__	#6-32	0.138	3/4
FA-614-__	#6-32	0.138	7/8
FA-616-__	#6-32	0.138	1
FA-804-__	#8-32	0.164	1/4
FA-805-__	#8-32	0.164	5/16
FA-806-__	#8-32	0.164	3/8
FA-807-__	#8-32	0.164	7/16
FA-808-__	#8-32	0.164	1/2
FA-810-__	#8-32	0.164	5/8
FA-812-__	#8-32	0.164	3/4
FA-814-__	#8-32	0.164	7/8
FA-816-__	#8-32	0.164	1
FA-820-__	#8-32	0.164	1 1/4
FA-1004-__	#10-32	0.190	1/4
FA-1005-__	#10-32	0.190	5/16
FA-1006-__	#10-32	0.190	3/8
FA-1007-__	#10-32	0.190	7/16

Part Number	Size	Dia	Length
FA-1008-__	#10-32	0.190	1/2
FA-1010-__	#10-32	0.190	5/8
FA-1012-__	#10-32	0.190	3/4
FA-1014-__	#10-32	0.190	7/8
FA-1016-__	#10-32	0.190	1
FA-1018-__	#10-32	0.190	1 1/8
FA-1020-__	#10-32	0.190	1 1/4
FA-1024-__	#10-32	0.190	1 1/2
FA-2004-__	1/4-20	0.250	1/4
FA-2006-__	1/4-20	0.250	3/8
FA-2008-__	1/4-20	0.250	1/2
FA-2010-__	1/4-20	0.250	5/8
FA-2012-__	1/4-20	0.250	3/4
FA-2014-__	1/4-20	0.250	7/8
FA-2016-__	1/4-20	0.250	1
FA-2018-__	1/4-20	0.250	1 1/8
FA-2020-__	1/4-20	0.250	1 1/4
FA-2024-__	1/4-20	0.250	1 1/2

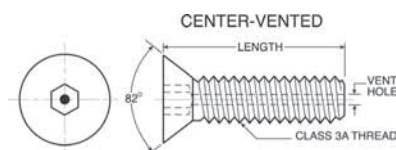

For detailed prints, tolerances, and variations
please email sales@uccomponents.com

Vented Screw, Flat Head, Slotted Drive


ASME B18.6.3 / 18-8 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
FS-202-__	#2-56	0.086	1/8
FS-203-__	#2-56	0.086	3/16
FS-204-__	#2-56	0.086	1/4
FS-205-__	#2-56	0.086	5/16
FS-206-__	#2-56	0.086	3/8
FS-207-__	#2-56	0.086	7/16
FS-208-__	#2-56	0.086	1/2
FS-210-__	#2-56	0.086	5/8
FS-212-__	#2-56	0.086	3/4
FS-402-__	#4-40	0.112	1/8
FS-403-__	#4-40	0.112	3/16
FS-404-__	#4-40	0.112	1/4
FS-405-__	#4-40	0.112	5/16
FS-406-__	#4-40	0.112	3/8
FS-407-__	#4-40	0.112	7/16
FS-408-__	#4-40	0.112	1/2
FS-410-__	#4-40	0.112	5/8
FS-412-__	#4-40	0.112	3/4
FS-603-__	#6-32	0.138	3/16
FS-604-__	#6-32	0.138	1/4
FS-605-__	#6-32	0.138	5/16
FS-606-__	#6-32	0.138	3/8
FS-607-__	#6-32	0.138	7/16
FS-608-__	#6-32	0.138	1/2
FS-610-__	#6-32	0.138	5/8
FS-612-__	#6-32	0.138	3/4
FS-614-__	#6-32	0.138	7/8
FS-616-__	#6-32	0.138	1
FS-804-__	#8-32	0.164	1/4
FS-805-__	#8-32	0.164	5/16
FS-806-__	#8-32	0.164	3/8
FS-807-__	#8-32	0.164	7/16
FS-808-__	#8-32	0.164	1/2
FS-810-__	#8-32	0.164	5/8
FS-812-__	#8-32	0.164	3/4
FS-814-__	#8-32	0.164	7/8
FS-816-__	#8-32	0.164	1
FS-820-__	#8-32	0.164	1 1/4
FS-1004-__	#10-32	0.190	1/4
FS-1005-__	#10-32	0.190	5/16
FS-1006-__	#10-32	0.190	3/8
FS-1007-__	#10-32	0.190	7/16

Part Number	Size	Dia	Length
FS-1008-__	#10-32	0.190	1/2
FS-1010-__	#10-32	0.190	5/8
FS-1012-__	#10-32	0.190	3/4
FS-1014-__	#10-32	0.190	7/8
FS-1016-__	#10-32	0.190	1
FS-1018-__	#10-32	0.190	1 1/8
FS-1020-__	#10-32	0.190	1 1/4
FS-1024-__	#10-32	0.190	1 1/2
FS-2004-__	1/4-20	0.250	1/4
FS-2006-__	1/4-20	0.250	3/8
FS-2008-__	1/4-20	0.250	1/2
FS-2010-__	1/4-20	0.250	5/8
FS-2012-__	1/4-20	0.250	3/4
FS-2014-__	1/4-20	0.250	7/8
FS-2016-__	1/4-20	0.250	1
FS-2018-__	1/4-20	0.250	1 1/8
FS-2020-__	1/4-20	0.250	1 1/4
FS-2024-__	1/4-20	0.250	1 1/2

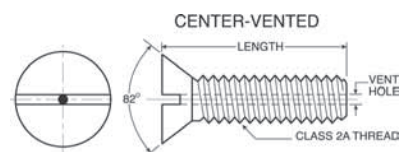

For detailed prints, tolerances, and variations
please email sales@ucomponents.com

Vented Screw, Hex Head


ASME B18.6.3 / B18.2.1 / 18-8 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
H-403-__	#4-40	0.112	3/16
H-404-__	#4-40	0.112	1/4
H-405-__	#4-40	0.112	5/16
H-406-__	#4-40	0.112	3/8
H-407-__	#4-40	0.112	7/16
H-408-__	#4-40	0.112	1/2
H-410-__	#4-40	0.112	5/8
H-412-__	#4-40	0.112	3/4
H-604-__	#6-32	0.138	1/4
H-605-__	#6-32	0.138	5/16
H-606-__	#6-32	0.138	3/8
H-607-__	#6-32	0.138	7/16
H-608-__	#6-32	0.138	1/2
H-610-__	#6-32	0.138	5/8
H-612-__	#6-32	0.138	3/4
H-616-__	#6-32	0.138	1
H-803-__	#8-32	0.164	3/16
H-804-__	#8-32	0.164	1/4
H-805-__	#8-32	0.164	5/16
H-806-__	#8-32	0.164	3/8
H-808-__	#8-32	0.164	1/2
H-810-__	#8-32	0.164	5/8
H-812-__	#8-32	0.164	3/4
H-814-__	#8-32	0.164	7/8
H-816-__	#8-32	0.164	1
H-820-__	#8-32	0.164	1 1/4
H-1003-__	#10-32	0.190	3/16
H-1004-__	#10-32	0.190	1/4
H-1005-__	#10-32	0.190	5/16
H-1006-__	#10-32	0.190	3/8
H-1008-__	#10-32	0.190	1/2
H-1010-__	#10-32	0.190	5/8
H-1012-__	#10-32	0.190	3/4
H-1014-__	#10-32	0.190	7/8
H-1016-__	#10-32	0.190	1
H-1020-__	#10-32	0.190	1 1/4
H-2006-__	1/4-20	0.250	3/8
H-2008-__	1/4-20	0.250	1/2
H-2010-__	1/4-20	0.250	5/8
H-2012-__	1/4-20	0.250	3/4
H-2014-__	1/4-20	0.250	7/8
H-2016-__	1/4-20	0.250	1

Part Number	Size	Dia	Length
H-2020-__	1/4-20	0.250	1 1/4
H-2024-__	1/4-20	0.250	1 1/2
H-1808-__	5/16-18	0.313	1/2
H-1810-__	5/16-18	0.313	5/8
H-1812-__	5/16-18	0.313	3/4
H-1814-__	5/16-18	0.313	7/8
H-1816-__	5/16-18	0.313	1
H-1820-__	5/16-18	0.313	1 1/4
H-1824-__	5/16-18	0.313	1 1/2
H-1832-__	5/16-18	0.313	2
H-3108-__	5/16-24	0.313	1/2
H-3110-__	5/16-24	0.313	5/8
H-3112-__	5/16-24	0.313	3/4
H-3114-__	5/16-24	0.313	7/8
H-3116-__	5/16-24	0.313	1
H-3120-__	5/16-24	0.313	1 1/4
H-3124-__	5/16-24	0.313	1 1/2
H-3132-__	5/16-24	0.313	2



For detailed prints, tolerances, and variations
please email sales@uccomponents.com

Vented Screw, Set, Cup Point, Socket Drive


ASME B18.3 / 18-8 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
T-202-__	#2-56	0.086	1/8
T-203-__	#2-56	0.086	3/16
T-204-__	#2-56	0.086	1/4
T-205-__	#2-56	0.086	5/16
T-206-__	#2-56	0.086	3/8
T-207-__	#2-56	0.086	7/16
T-208-__	#2-56	0.086	1/2
T-210-__	#2-56	0.086	5/8
T-212-__	#2-56	0.086	3/4
T-402-__	#4-40	0.112	1/8
T-403-__	#4-40	0.112	3/16
T-404-__	#4-40	0.112	1/4
T-405-__	#4-40	0.112	5/16
T-406-__	#4-40	0.112	3/8
T-407-__	#4-40	0.112	7/16
T-408-__	#4-40	0.112	1/2
T-410-__	#4-40	0.112	5/8
T-412-__	#4-40	0.112	3/4
T-603-__	#6-32	0.138	3/16
T-604-__	#6-32	0.138	1/4
T-605-__	#6-32	0.138	5/16
T-606-__	#6-32	0.138	3/8
T-607-__	#6-32	0.138	7/16
T-608-__	#6-32	0.138	1/2
T-610-__	#6-32	0.138	5/8
T-612-__	#6-32	0.138	3/4
T-614-__	#6-32	0.138	7/8
T-616-__	#6-32	0.138	1
T-804-__	#8-32	0.164	1/4
T-805-__	#8-32	0.164	5/16
T-806-__	#8-32	0.164	3/8
T-807-__	#8-32	0.164	7/16
T-808-__	#8-32	0.164	1/2
T-810-__	#8-32	0.164	5/8
T-812-__	#8-32	0.164	3/4
T-814-__	#8-32	0.164	7/8
T-816-__	#8-32	0.164	1
T-820-__	#8-32	0.164	1 1/4
T-1004-__	#10-32	0.190	1/4
T-1005-__	#10-32	0.190	5/16
T-1006-__	#10-32	0.190	3/8
T-1007-__	#10-32	0.190	7/16

Part Number	Size	Dia	Length
T-1008-__	#10-32	0.190	1/2
T-1010-__	#10-32	0.190	5/8
T-1012-__	#10-32	0.190	3/4
T-1014-__	#10-32	0.190	7/8
T-1016-__	#10-32	0.190	1
T-1018-__	#10-32	0.190	1 1/8
T-1020-__	#10-32	0.190	1 1/4
T-1024-__	#10-32	0.190	1 1/2
T-2004-__	1/4-20	0.250	1/4
T-2006-__	1/4-20	0.250	3/8
T-2008-__	1/4-20	0.250	1/2
T-2010-__	1/4-20	0.250	5/8
T-2012-__	1/4-20	0.250	3/4
T-2014-__	1/4-20	0.250	7/8
T-2016-__	1/4-20	0.250	1
T-2018-__	1/4-20	0.250	1 1/8
T-2020-__	1/4-20	0.250	1 1/4
T-2024-__	1/4-20	0.250	1 1/2

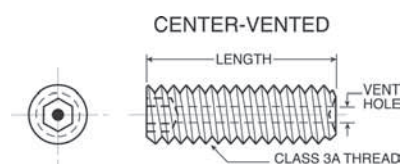

For detailed prints, tolerances, and variations
please email sales@ucomponents.com

Vented Screw, Fillister Head, Slotted Drive


ASME B18.6.3 / 18-8 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
FL-202-__	#2-56	0.086	1/8
FL-203-__	#2-56	0.086	3/16
FL-204-__	#2-56	0.086	1/4
FL-205-__	#2-56	0.086	5/16
FL-206-__	#2-56	0.086	3/8
FL-207-__	#2-56	0.086	7/16
FL-208-__	#2-56	0.086	1/2
FL-210-__	#2-56	0.086	5/8
FL-212-__	#2-56	0.086	3/4
FL-402-__	#4-40	0.112	1/8
FL-403-__	#4-40	0.112	3/16
FL-404-__	#4-40	0.112	1/4
FL-405-__	#4-40	0.112	5/16
FL-406-__	#4-40	0.112	3/8
FL-407-__	#4-40	0.112	7/16
FL-408-__	#4-40	0.112	1/2
FL-410-__	#4-40	0.112	5/8
FL-412-__	#4-40	0.112	3/4
FL-603-__	#6-32	0.138	3/16
FL-604-__	#6-32	0.138	1/4
FL-605-__	#6-32	0.138	5/16
FL-606-__	#6-32	0.138	3/8
FL-607-__	#6-32	0.138	7/16
FL-608-__	#6-32	0.138	1/2
FL-610-__	#6-32	0.138	5/8
FL-612-__	#6-32	0.138	3/4
FL-614-__	#6-32	0.138	7/8
FL-616-__	#6-32	0.138	1
FL-804-__	#8-32	0.164	1/4
FL-805-__	#8-32	0.164	5/16
FL-806-__	#8-32	0.164	3/8
FL-807-__	#8-32	0.164	7/16
FL-808-__	#8-32	0.164	1/2
FL-810-__	#8-32	0.164	5/8
FL-812-__	#8-32	0.164	3/4
FL-814-__	#8-32	0.164	7/8
FL-816-__	#8-32	0.164	1
FL-820-__	#8-32	0.164	1 1/4
FL-1004-__	#10-32	0.190	1/4
FL-1005-__	#10-32	0.190	5/16
FL-1006-__	#10-32	0.190	3/8
FL-1007-__	#10-32	0.190	7/16

Part Number	Size	Dia	Length
FL-1008-__	#10-32	0.190	1/2
FL-1010-__	#10-32	0.190	5/8
FL-1012-__	#10-32	0.190	3/4
FL-1014-__	#10-32	0.190	7/8
FL-1016-__	#10-32	0.190	1
FL-1018-__	#10-32	0.190	1 1/8
FL-1020-__	#10-32	0.190	1 1/4
FL-1024-__	#10-32	0.190	1 1/2
FL-2004-__	1/4-20	0.250	1/4
FL-2006-__	1/4-20	0.250	3/8
FL-2008-__	1/4-20	0.250	1/2
FL-2010-__	1/4-20	0.250	5/8
FL-2012-__	1/4-20	0.250	3/4
FL-2014-__	1/4-20	0.250	7/8
FL-2016-__	1/4-20	0.250	1
FL-2018-__	1/4-20	0.250	1 1/8
FL-2020-__	1/4-20	0.250	1 1/4
FL-2024-__	1/4-20	0.250	1 1/2



For detailed prints, tolerances, and variations
please email sales@ucomponents.com

Vented Screw, Pan Head, Phillips Drive


ASME B18.6.3 / 18-8 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
P-202-__	#2-56	0.086	1/8
P-203-__	#2-56	0.086	3/16
P-204-__	#2-56	0.086	1/4
P-205-__	#2-56	0.086	5/16
P-206-__	#2-56	0.086	3/8
P-207-__	#2-56	0.086	7/16
P-208-__	#2-56	0.086	1/2
P-210-__	#2-56	0.086	5/8
P-212-__	#2-56	0.086	3/4
P-402-__	#4-40	0.112	1/8
P-403-__	#4-40	0.112	3/16
P-404-__	#4-40	0.112	1/4
P-405-__	#4-40	0.112	5/16
P-406-__	#4-40	0.112	3/8
P-407-__	#4-40	0.112	7/16
P-408-__	#4-40	0.112	1/2
P-410-__	#4-40	0.112	5/8
P-412-__	#4-40	0.112	3/4
P-602-__	#6-32	0.138	1/8
P-603-__	#6-32	0.138	3/16
P-604-__	#6-32	0.138	1/4
P-605-__	#6-32	0.138	5/16
P-606-__	#6-32	0.138	3/8
P-607-__	#6-32	0.138	7/16
P-608-__	#6-32	0.138	1/2
P-610-__	#6-32	0.138	5/8
P-612-__	#6-32	0.138	3/4
P-614-__	#6-32	0.138	7/8
P-616-__	#6-32	0.138	1
P-803-__	#8-32	0.164	3/16
P-804-__	#8-32	0.164	1/4
P-805-__	#8-32	0.164	5/16
P-806-__	#8-32	0.164	3/8
P-807-__	#8-32	0.164	7/16
P-808-__	#8-32	0.164	1/2
P-810-__	#8-32	0.164	5/8
P-812-__	#8-32	0.164	3/4
P-814-__	#8-32	0.164	7/8
P-816-__	#8-32	0.164	1
P-818-__	#8-32	0.164	1 1/8
P-820-__	#8-32	0.164	1 1/4
P-1004-__	#10-32	0.190	1/4

Part Number	Size	Dia	Length
P-1005-__	#10-32	0.190	5/16
P-1006-__	#10-32	0.190	3/8
P-1007-__	#10-32	0.190	7/16
P-1008-__	#10-32	0.190	1/2
P-1010-__	#10-32	0.190	5/8
P-1012-__	#10-32	0.190	3/4
P-1014-__	#10-32	0.190	7/8
P-1016-__	#10-32	0.190	1
P-1018-__	#10-32	0.190	1 1/8
P-1020-__	#10-32	0.190	1 1/4
P-1022-__	#10-32	0.190	1 3/8
P-1024-__	#10-32	0.190	1 1/2
P-2004-__	1/4-20	0.250	1/4
P-2006-__	1/4-20	0.250	3/8
P-2008-__	1/4-20	0.250	1/2
P-2010-__	1/4-20	0.250	5/8
P-2012-__	1/4-20	0.250	3/4
P-2014-__	1/4-20	0.250	7/8
P-2016-__	1/4-20	0.250	1
P-2018-__	1/4-20	0.250	1 1/8
P-2020-__	1/4-20	0.250	1 1/4
P-2024-__	1/4-20	0.250	1 1/2



For detailed prints, tolerances, and variations
please email sales@ucomponents.com

Vented Screw, Pan Head, Slotted Drive


ASME B18.6.3 / 18-8 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
PS-202-__	#2-56	0.086	1/8
PS-203-__	#2-56	0.086	3/16
PS-204-__	#2-56	0.086	1/4
PS-205-__	#2-56	0.086	5/16
PS-206-__	#2-56	0.086	3/8
PS-207-__	#2-56	0.086	7/16
PS-208-__	#2-56	0.086	1/2
PS-210-__	#2-56	0.086	5/8
PS-212-__	#2-56	0.086	3/4
PS-402-__	#4-40	0.112	1/8
PS-403-__	#4-40	0.112	3/16
PS-404-__	#4-40	0.112	1/4
PS-405-__	#4-40	0.112	5/16
PS-406-__	#4-40	0.112	3/8
PS-407-__	#4-40	0.112	7/16
PS-408-__	#4-40	0.112	1/2
PS-410-__	#4-40	0.112	5/8
PS-412-__	#4-40	0.112	3/4
PS-602-__	#6-32	0.138	1/8
PS-603-__	#6-32	0.138	3/16
PS-604-__	#6-32	0.138	1/4
PS-605-__	#6-32	0.138	5/16
PS-606-__	#6-32	0.138	3/8
PS-607-__	#6-32	0.138	7/16
PS-608-__	#6-32	0.138	1/2
PS-610-__	#6-32	0.138	5/8
PS-612-__	#6-32	0.138	3/4
PS-614-__	#6-32	0.138	7/8
PS-616-__	#6-32	0.138	1
PS-803-__	#8-32	0.164	3/16
PS-804-__	#8-32	0.164	1/4
PS-805-__	#8-32	0.164	5/16
PS-806-__	#8-32	0.164	3/8
PS-807-__	#8-32	0.164	7/16
PS-808-__	#8-32	0.164	1/2
PS-810-__	#8-32	0.164	5/8
PS-812-__	#8-32	0.164	3/4
PS-814-__	#8-32	0.164	7/8
PS-816-__	#8-32	0.164	1
PS-818-__	#8-32	0.164	1 1/8
PS-820-__	#8-32	0.164	1 1/4
PS-1004-__	#10-32	0.190	1/4

Part Number	Size	Dia	Length
PS-1005-__	#10-32	0.190	5/16
PS-1006-__	#10-32	0.190	3/8
PS-1007-__	#10-32	0.190	7/16
PS-1008-__	#10-32	0.190	1/2
PS-1010-__	#10-32	0.190	5/8
PS-1012-__	#10-32	0.190	3/4
PS-1014-__	#10-32	0.190	7/8
PS-1016-__	#10-32	0.190	1
PS-1018-__	#10-32	0.190	1 1/8
PS-1020-__	#10-32	0.190	1 1/4
PS-1022-__	#10-32	0.190	1 3/8
PS-1024-__	#10-32	0.190	1 1/2
PS-2004-__	1/4-20	0.250	1/4
PS-2006-__	1/4-20	0.250	3/8
PS-2008-__	1/4-20	0.250	1/2
PS-2010-__	1/4-20	0.250	5/8
PS-2012-__	1/4-20	0.250	3/4
PS-2014-__	1/4-20	0.250	7/8
PS-2016-__	1/4-20	0.250	1
PS-2018-__	1/4-20	0.250	1 1/8
PS-2020-__	1/4-20	0.250	1 1/4
PS-2024-__	1/4-20	0.250	1 1/2



For detailed prints, tolerances, and variations
please email sales@ucomponents.com

Vented Screw, Shoulder, Socket Drive


303 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
SHCV-4410-__	#4-40	0.112	5/32
SHCV-4411-__	#4-40	0.112	5/32
SHCV-4412-__	#4-40	0.112	5/32
SHCV-4413-__	#4-40	0.112	5/32
SHCV-4414-__	#4-40	0.112	5/32
SHCV-4415-__	#8-32	0.164	3/16
SHCV-4416-__	#8-32	0.164	3/16
SHCV-4417-__	#8-32	0.164	3/16
SHCV-4418-__	#8-32	0.164	3/16
SHCV-4419-__	#8-32	0.164	3/16
SHCV-4420-__	#8-32	0.164	3/16
SHCV-4421-__	#8-32	0.164	3/16
SHCV-4422-__	#8-32	0.164	3/16
SHCV-4423-__	#8-32	0.164	3/16
SHCV-4424-__	#8-32	0.164	3/16
SHCV-4425-__	#8-32	0.164	3/16
SHCV-4426-__	#10-32	0.190	1/4
SHCV-4427-__	#10-32	0.190	1/4
SHCV-4428-__	#10-32	0.190	1/4
SHCV-4429-__	#10-32	0.190	1/4
SHCV-4430-__	#10-32	0.190	1/4
SHCV-4431-__	#10-32	0.190	1/4
SHCV-4432-__	#10-32	0.190	1/4
SHCV-4433-__	#10-32	0.190	1/4
SHCV-4434-__	#10-32	0.190	1/4
SHCV-4435-__	#10-32	0.190	1/4
SHCV-4436-__	#10-32	0.190	1/4
SHCV-4437-__	1/4-20	0.250	7/16
SHCV-4438-__	1/4-20	0.250	7/16
SHCV-4439-__	1/4-20	0.250	7/16
SHCV-4440-__	1/4-20	0.250	7/16
SHCV-4441-__	1/4-20	0.250	7/16
SHCV-4442-__	1/4-20	0.250	7/16
SHCV-4443-__	1/4-20	0.250	7/16
SHCV-4444-__	1/4-20	0.250	7/16
SHCV-4445-__	1/4-20	0.250	7/16
SHCV-4446-__	1/4-20	0.250	7/16
SHCV-4447-__	5/16-18	0.313	1/2
SHCV-4448-__	5/16-18	0.313	1/2
SHCV-4449-__	5/16-18	0.313	1/2
SHCV-4450-__	5/16-18	0.313	1/2
SHCV-4451-__	3/8-16	0.375	5/8

Part Number	Size	Dia	Length
SHCV-4452-__	3/8-16	0.375	5/8
SHCV-4453-__	3/8-16	0.375	5/8
SHCV-4454-__	3/8-16	0.375	5/8

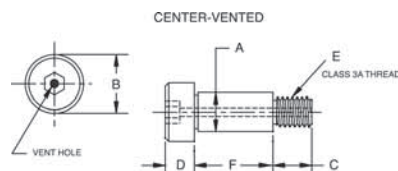

For detailed prints, tolerances, and variations
please email sales@ucomponents.com

SLOT-VENTED SCREWS



18700 Adams Ct. Morgan Hill, CA 95037
Phone: 408.782.1929 | Fax: 408.782.7995
Email: sales@ucccomponents.com
www.ucccomponents.com

INCH

Slot-Vented Screw, Button Head, Socket Drive


ASME B18.3 / 18-8 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
BU-202-SV__	#2-56	0.086	1/8
BU-203-SV__	#2-56	0.086	3/16
BU-204-SV__	#2-56	0.086	1/4
BU-205-SV__	#2-56	0.086	5/16
BU-206-SV__	#2-56	0.086	3/8
BU-207-SV__	#2-56	0.086	7/16
BU-208-SV__	#2-56	0.086	1/2
BU-210-SV__	#2-56	0.086	5/8
BU-212-SV__	#2-56	0.086	3/4
BU-216-SV__	#2-56	0.086	1
BU-402-SV__	#4-40	0.112	1/8
BU-404-SV__	#4-40	0.112	1/4
BU-405-SV__	#4-40	0.112	5/16
BU-403-SV__	#4-40	0.112	3/16
BU-406-SV__	#4-40	0.112	3/8
BU-407-SV__	#4-40	0.112	7/16
BU-408-SV__	#4-40	0.112	1/2
BU-410-SV__	#4-40	0.112	5/8
BU-412-SV__	#4-40	0.112	3/4
BU-416-SV__	#4-40	0.112	1
BU-602-SV__	#6-32	0.138	1/8
BU-604-SV__	#6-32	0.138	1/4
BU-605-SV__	#6-32	0.138	5/16
BU-603-SV__	#6-32	0.138	3/16
BU-606-SV__	#6-32	0.138	3/8
BU-607-SV__	#6-32	0.138	7/16
BU-608-SV__	#6-32	0.138	1/2
BU-610-SV__	#6-32	0.138	5/8
BU-612-SV__	#6-32	0.138	3/4
BU-616-SV__	#6-32	0.138	1
BU-804-SV__	#8-32	0.164	1/4
BU-805-SV__	#8-32	0.164	5/16
BU-806-SV__	#8-32	0.164	3/8
BU-807-SV__	#8-32	0.164	7/16
BU-808-SV__	#8-32	0.164	1/2
BU-810-SV__	#8-32	0.164	5/8
BU-812-SV__	#8-32	0.164	3/4
BU-814-SV__	#8-32	0.164	7/8
BU-816-SV__	#8-32	0.164	1
BU-820-SV__	#8-32	0.164	1 1/4
BU-1004-SV__	#10-32	0.190	1/4
BU-1005-SV__	#10-32	0.190	5/16

Part Number	Size	Dia	Length
BU-1006-SV__	#10-32	0.190	3/8
BU-1007-SV__	#10-32	0.190	7/16
BU-1008-SV__	#10-32	0.190	1/2
BU-1010-SV__	#10-32	0.190	5/8
BU-1012-SV__	#10-32	0.190	3/4
BU-1014-SV__	#10-32	0.190	7/8
BU-1016-SV__	#10-32	0.190	1
BU-1020-SV__	#10-32	0.190	1 1/4
BU-1024-SV__	#10-32	0.190	1 1/2
BU-2004-SV__	1/4-20	0.250	1/4
BU-2006-SV__	1/4-20	0.250	3/8
BU-2008-SV__	1/4-20	0.250	1/2
BU-2010-SV__	1/4-20	0.250	5/8
BU-2012-SV__	1/4-20	0.250	3/4
BU-2014-SV__	1/4-20	0.250	7/8
BU-2016-SV__	1/4-20	0.250	1
BU-2018-SV__	1/4-20	0.250	1 1/8
BU-2020-SV__	1/4-20	0.250	1 1/4
BU-2024-SV__	1/4-20	0.250	1 1/2



For detailed prints, tolerances, and variations
please email sales@ucomponents.com

Slot-Vented Screw, Socket Head Cap


ASME B18.3 / 18-8 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
C-202-SV__	#2-56	0.086	1/8
C-203-SV__	#2-56	0.086	3/16
C-204-SV__	#2-56	0.086	1/4
C-205-SV__	#2-56	0.086	5/16
C-206-SV__	#2-56	0.086	3/8
C-207-SV__	#2-56	0.086	7/16
C-208-SV__	#2-56	0.086	1/2
C-210-SV__	#2-56	0.086	5/8
C-212-SV__	#2-56	0.086	3/4
C-216-SV__	#2-56	0.086	1
C-402-SV__	#4-40	0.112	1/8
C-403-SV__	#4-40	0.112	3/16
C-404-SV__	#4-40	0.112	1/4
C-405-SV__	#4-40	0.112	5/16
C-406-SV__	#4-40	0.112	3/8
C-407-SV__	#4-40	0.112	7/16
C-408-SV__	#4-40	0.112	1/2
C-410-SV__	#4-40	0.112	5/8
C-412-SV__	#4-40	0.112	3/4
C-416-SV__	#4-40	0.112	1
C-602-SV__	#6-32	0.138	1/8
C-603-SV__	#6-32	0.138	3/16
C-604-SV__	#6-32	0.138	1/4
C-605-SV__	#6-32	0.138	5/16
C-606-SV__	#6-32	0.138	3/8
C-607-SV__	#6-32	0.138	7/16
C-608-SV__	#6-32	0.138	1/2
C-610-SV__	#6-32	0.138	5/8
C-612-SV__	#6-32	0.138	3/4
C-616-SV__	#6-32	0.138	1
C-804-SV__	#8-32	0.164	1/4
C-805-SV__	#8-32	0.164	5/16
C-806-SV__	#8-32	0.164	3/8
C-807-SV__	#8-32	0.164	7/16
C-808-SV__	#8-32	0.164	1/2
C-810-SV__	#8-32	0.164	5/8
C-812-SV__	#8-32	0.164	3/4
C-814-SV__	#8-32	0.164	7/8
C-816-SV__	#8-32	0.164	1
C-820-SV__	#8-32	0.164	1 1/4
C-2404-SV__	#10-24	0.190	1/4
C-2406-SV__	#10-24	0.190	3/8

Part Number	Size	Dia	Length
C-2408-SV__	#10-24	0.190	1/2
C-2410-SV__	#10-24	0.190	5/8
C-2412-SV__	#10-24	0.190	3/4
C-2414-SV__	#10-24	0.190	7/8
C-2416-SV__	#10-24	0.190	1
C-2418-SV__	#10-24	0.190	1 1/8
C-2420-SV__	#10-24	0.190	1 1/4
C-2422-SV__	#10-24	0.190	1 3/8
C-2424-SV__	#10-24	0.190	1 1/2
C-1004-SV__	#10-32	0.190	1/4
C-1005-SV__	#10-32	0.190	5/16
C-1006-SV__	#10-32	0.190	3/8
C-1007-SV__	#10-32	0.190	7/16
C-1008-SV__	#10-32	0.190	1/2
C-1010-SV__	#10-32	0.190	5/8
C-1012-SV__	#10-32	0.190	3/4
C-1014-SV__	#10-32	0.190	7/8
C-1016-SV__	#10-32	0.190	1
C-1018-SV__	#10-32	0.190	1 1/8
C-1020-SV__	#10-32	0.190	1 1/4
C-1022-SV__	#10-32	0.190	1 3/8
C-1024-SV__	#10-32	0.190	1 1/2
C-1026-SV__	#10-32	0.190	1 5/8
C-1028-SV__	#10-32	0.190	1 3/4



For detailed prints, tolerances, and variations
please email sales@uccomponents.com

Slot-Vented Screw, Socket Head Cap


ASME B18.3 / 18-8 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
C-1608-SV__	3/8-16	0.375	1/2
C-1610-SV__	3/8-16	0.375	5/8
C-1612-SV__	3/8-16	0.375	3/4
C-1614-SV__	3/8-16	0.375	7/8
C-1616-SV__	3/8-16	0.375	1
C-1620-SV__	3/8-16	0.375	1 1/4
C-1624-SV__	3/8-16	0.375	1 1/2
C-1628-SV__	3/8-16	0.375	1 3/4
C-1632-SV__	3/8-16	0.375	2
C-3808-SV__	3/8-24	0.375	1/2
C-3810-SV__	3/8-24	0.375	5/8
C-3812-SV__	3/8-24	0.375	3/4
C-3814-SV__	3/8-24	0.375	7/8
C-3816-SV__	3/8-24	0.375	1
C-3820-SV__	3/8-24	0.375	1 1/4
C-3824-SV__	3/8-24	0.375	1 1/2
C-3828-SV__	3/8-24	0.375	1 3/4
C-3832-SV__	3/8-24	0.375	2
C-1312-SV__	1/2-13	0.500	3/4
C-1316-SV__	1/2-13	0.500	1
C-1320-SV__	1/2-13	0.500	1 1/4
C-1324-SV__	1/2-13	0.500	1 1/2
C-1328-SV__	1/2-13	0.500	1 3/4
C-1332-SV__	1/2-13	0.500	2
C-2004-SV__	1/4-20	0.250	1/4
C-2005-SV__	1/4-20	0.250	5/16
C-2006-SV__	1/4-20	0.250	3/8
C-2008-SV__	1/4-20	0.250	1/2
C-2010-SV__	1/4-20	0.250	5/8
C-2012-SV__	1/4-20	0.250	3/4
C-2014-SV__	1/4-20	0.250	7/8
C-2016-SV__	1/4-20	0.250	1
C-2018-SV__	1/4-20	0.250	1 1/8
C-2020-SV__	1/4-20	0.250	1 1/4
C-2022-SV__	1/4-20	0.250	1 3/8
C-2024-SV__	1/4-20	0.250	1 1/2
C-2026-SV__	1/4-20	0.250	1 5/8
C-2028-SV__	1/4-20	0.250	1 3/4
C-2032-SV__	1/4-20	0.250	2
C-2806-SV__	1/4-28	0.250	3/8
C-2808-SV__	1/4-28	0.250	1/2
C-2810-SV__	1/4-28	0.250	5/8
C-2812-SV__	1/4-28	0.250	3/4

Part Number	Size	Dia	Length
C-2814-SV__	1/4-28	0.250	7/8
C-2816-SV__	1/4-28	0.250	1
C-2820-SV__	1/4-28	0.250	1 1/4
C-2824-SV__	1/4-28	0.250	1 1/2
C-1808-SV__	5/16-18	0.313	1/2
C-1810-SV__	5/16-18	0.313	5/8
C-1812-SV__	5/16-18	0.313	3/4
C-1814-SV__	5/16-18	0.313	7/8
C-1816-SV__	5/16-18	0.313	1
C-1820-SV__	5/16-18	0.313	1 1/4
C-1824-SV__	5/16-18	0.313	1 1/2
C-1828-SV__	5/16-18	0.313	1 3/4
C-1832-SV__	5/16-18	0.313	2
C-3108-SV__	5/16-24	0.313	1/2
C-3110-SV__	5/16-24	0.313	5/8
C-3112-SV__	5/16-24	0.313	3/4
C-3114-SV__	5/16-24	0.313	7/8
C-3116-SV__	5/16-24	0.313	1
C-3120-SV__	5/16-24	0.313	1 1/4
C-3124-SV__	5/16-24	0.313	1 1/2
C-3128-SV__	5/16-24	0.313	1 3/4
C-3132-SV__	5/16-24	0.313	2



For detailed prints, tolerances, and variations
please email sales@ucomponents.com

Slot-Vented Screw, Flat Head, Phillips Drive


ASME B18.6.3 / 18-8 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
F-202-SV__	#2-56	0.086	1/8
F-203-SV__	#2-56	0.086	3/16
F-204-SV__	#2-56	0.086	1/4
F-205-SV__	#2-56	0.086	5/16
F-206-SV__	#2-56	0.086	3/8
F-207-SV__	#2-56	0.086	7/16
F-208-SV__	#2-56	0.086	1/2
F-210-SV__	#2-56	0.086	5/8
F-212-SV__	#2-56	0.086	3/4
F-216-SV__	#2-56	0.086	1
F-402-SV__	#4-40	0.112	1/8
F-403-SV__	#4-40	0.112	3/16
F-404-SV__	#4-40	0.112	1/4
F-405-SV__	#4-40	0.112	5/16
F-406-SV__	#4-40	0.112	3/8
F-407-SV__	#4-40	0.112	7/16
F-408-SV__	#4-40	0.112	1/2
F-410-SV__	#4-40	0.112	5/8
F-412-SV__	#4-40	0.112	3/4
F-416-SV__	#4-40	0.112	1
F-603-SV__	#6-32	0.138	3/16
F-604-SV__	#6-32	0.138	1/4
F-605-SV__	#6-32	0.138	5/16
F-606-SV__	#6-32	0.138	3/8
F-607-SV__	#6-32	0.138	7/16
F-608-SV__	#6-32	0.138	1/2
F-610-SV__	#6-32	0.138	5/8
F-612-SV__	#6-32	0.138	3/4
F-616-SV__	#6-32	0.138	1
F-804-SV__	#8-32	0.138	1/4
F-805-SV__	#8-32	0.138	5/16
F-806-SV__	#8-32	0.138	3/8
F-807-SV__	#8-32	0.138	7/16
F-808-SV__	#8-32	0.138	1/2
F-810-SV__	#8-32	0.138	5/8
F-812-SV__	#8-32	0.138	3/4
F-814-SV__	#8-32	0.138	7/8
F-816-SV__	#8-32	0.138	1
F-820-SV__	#8-32	0.138	1 1/4
F-1004-SV__	#10-32	0.190	1/4
F-1005-SV__	#10-32	0.190	5/16
F-1006-SV__	#10-32	0.190	3/8

Part Number	Size	Dia	Length
F-1007-SV__	#10-32	0.190	7/16
F-1008-SV__	#10-32	0.190	1/2
F-1010-SV__	#10-32	0.190	5/8
F-1012-SV__	#10-32	0.190	3/4
F-1014-SV__	#10-32	0.190	7/8
F-1016-SV__	#10-32	0.190	1
F-1020-SV__	#10-32	0.190	1 1/4
F-1024-SV__	#10-32	0.190	1 1/2
F-2006-SV__	1/4-20	0.250	3/8
F-2008-SV__	1/4-20	0.250	1/2
F-2010-SV__	1/4-20	0.250	5/8
F-2012-SV__	1/4-20	0.250	3/4
F-2014-SV__	1/4-20	0.250	7/8
F-2016-SV__	1/4-20	0.250	1
F-2018-SV__	1/4-20	0.250	1 1/8
F-2020-SV__	1/4-20	0.250	1 1/4
F-2024-SV__	1/4-20	0.250	1 1/2

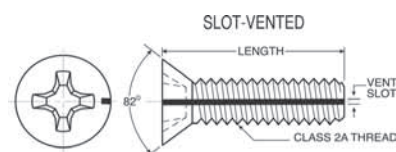

For detailed prints, tolerances, and variations
please email sales@ucomponents.com

Slot-Vented Screw, Flat Head, Socket Drive


ASME B18.3 / 18-8 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
FA-202-SV__	#2-56	0.086	1/8
FA-203-SV__	#2-56	0.086	3/16
FA-204-SV__	#2-56	0.086	1/4
FA-205-SV__	#2-56	0.086	5/16
FA-206-SV__	#2-56	0.086	3/8
FA-207-SV__	#2-56	0.086	7/16
FA-208-SV__	#2-56	0.086	1/2
FA-210-SV__	#2-56	0.086	5/8
FA-212-SV__	#2-56	0.086	3/4
FA-216-SV__	#2-56	0.086	1
FA-402-SV__	#4-40	0.112	1/8
FA-403-SV__	#4-40	0.112	3/16
FA-404-SV__	#4-40	0.112	1/4
FA-405-SV__	#4-40	0.112	5/16
FA-406-SV__	#4-40	0.112	3/8
FA-407-SV__	#4-40	0.112	7/16
FA-408-SV__	#4-40	0.112	1/2
FA-410-SV__	#4-40	0.112	5/8
FA-412-SV__	#4-40	0.112	3/4
FA-416-SV__	#4-40	0.112	1
FA-603-SV__	#6-32	0.138	3/16
FA-604-SV__	#6-32	0.138	1/4
FA-605-SV__	#6-32	0.138	5/16
FA-606-SV__	#6-32	0.138	3/8
FA-607-SV__	#6-32	0.138	7/16
FA-608-SV__	#6-32	0.138	1/2
FA-610-SV__	#6-32	0.138	5/8
FA-612-SV__	#6-32	0.138	3/4
FA-616-SV__	#6-32	0.138	1
FA-804-SV__	#8-32	0.164	1/4
FA-805-SV__	#8-32	0.164	5/16
FA-806-SV__	#8-32	0.164	3/8
FA-807-SV__	#8-32	0.164	7/16
FA-808-SV__	#8-32	0.164	1/2
FA-810-SV__	#8-32	0.164	5/8
FA-812-SV__	#8-32	0.164	3/4
FA-814-SV__	#8-32	0.164	7/8
FA-816-SV__	#8-32	0.164	1
FA-820-SV__	#8-32	0.164	1 1/4
FA-1004-SV__	#10-32	0.190	1/4
FA-1005-SV__	#10-32	0.190	5/16
FA-1006-SV__	#10-32	0.190	3/8

Part Number	Size	Dia	Length
FA-1007-SV__	#10-32	0.190	7/16
FA-1008-SV__	#10-32	0.190	1/2
FA-1010-SV__	#10-32	0.190	5/8
FA-1012-SV__	#10-32	0.190	3/4
FA-1014-SV__	#10-32	0.190	7/8
FA-1016-SV__	#10-32	0.190	1
FA-1020-SV__	#10-32	0.190	1 1/4
FA-1024-SV__	#10-32	0.190	1 1/2
FA-2006-SV__	1/4-20	0.250	3/8
FA-2008-SV__	1/4-20	0.250	1/2
FA-2010-SV__	1/4-20	0.250	5/8
FA-2012-SV__	1/4-20	0.250	3/4
FA-2014-SV__	1/4-20	0.250	7/8
FA-2016-SV__	1/4-20	0.250	1
FA-2018-SV__	1/4-20	0.250	1 1/8
FA-2020-SV__	1/4-20	0.250	1 1/4
FA-2024-SV__	1/4-20	0.250	1 1/2



For detailed prints, tolerances, and variations
please email sales@ucomponents.com

Slot-Vented Screw, Slotted Flat Head


ASME B18.6.3 / 18-8 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
FS-202-SV__	#2-56	0.086	1/8
FS-203-SV__	#2-56	0.086	3/16
FS-204-SV__	#2-56	0.086	1/4
FS-205-SV__	#2-56	0.086	5/16
FS-206-SV__	#2-56	0.086	3/8
FS-207-SV__	#2-56	0.086	7/16
FS-208-SV__	#2-56	0.086	1/2
FS-210-SV__	#2-56	0.086	5/8
FS-212-SV__	#2-56	0.086	3/4
FS-216-SV__	#2-56	0.086	1
FS-402-SV__	#4-40	0.112	1/8
FS-404-SV__	#4-40	0.112	1/4
FS-405-SV__	#4-40	0.112	5/16
FS-403-SV__	#4-40	0.112	3/16
FS-406-SV__	#4-40	0.112	3/8
FS-407-SV__	#4-40	0.112	7/16
FS-408-SV__	#4-40	0.112	1/2
FS-410-SV__	#4-40	0.112	5/8
FS-412-SV__	#4-40	0.112	3/4
FS-416-SV__	#4-40	0.112	1
FS-604-SV__	#6-32	0.138	1/4
FS-605-SV__	#6-32	0.138	5/16
FS-603-SV__	#6-32	0.138	3/16
FS-606-SV__	#6-32	0.138	3/8
FS-607-SV__	#6-32	0.138	7/16
FS-608-SV__	#6-32	0.138	1/2
FS-610-SV__	#6-32	0.138	5/8
FS-612-SV__	#6-32	0.138	3/4
FS-616-SV__	#6-32	0.138	1
FS-804-SV__	#8-32	0.164	1/4
FS-805-SV__	#8-32	0.164	5/16
FS-806-SV__	#8-32	0.164	3/8
FS-807-SV__	#8-32	0.164	7/16
FS-808-SV__	#8-32	0.164	1/2
FS-810-SV__	#8-32	0.164	5/8
FS-812-SV__	#8-32	0.164	3/4
FS-814-SV__	#8-32	0.164	7/8
FS-816-SV__	#8-32	0.164	1
FS-820-SV__	#8-32	0.164	1 1/4
FS-1004-SV__	#10-32	0.190	1/4
FS-1005-SV__	#10-32	0.190	5/16
FS-1006-SV__	#10-32	0.190	3/8

Part Number	Size	Dia	Length
FS-1007-SV__	#10-32	0.190	7/16
FS-1008-SV__	#10-32	0.190	1/2
FS-1010-SV__	#10-32	0.190	5/8
FS-1012-SV__	#10-32	0.190	3/4
FS-1014-SV__	#10-32	0.190	7/8
FS-1016-SV__	#10-32	0.190	1
FS-1020-SV__	#10-32	0.190	1 1/4
FS-1024-SV__	#10-32	0.190	1 1/2
FS-2006-SV__	1/4-20	0.250	3/8
FS-2008-SV__	1/4-20	0.250	1/2
FS-2010-SV__	1/4-20	0.250	5/8
FS-2012-SV__	1/4-20	0.250	3/4
FS-2014-SV__	1/4-20	0.250	7/8
FS-2016-SV__	1/4-20	0.250	1
FS-2018-SV__	1/4-20	0.250	1 1/8
FS-2020-SV__	1/4-20	0.250	1 1/4
FS-2024-SV__	1/4-20	0.250	1 1/2



For detailed prints, tolerances, and variations
please email sales@ucomponents.com

Slot-Vented Screw, Hex Head

ASME B18.6.3 / B18.2.1 / 18-8 Stainless Steel

For selected Part Number, add Finish Suffix

 Precision Cleaned
(No-suffix)

 Silver plated
-A

 Gold plated
-AU

 Nickel plated
-K


 MoS2 coated
-C

 WS2 coated
-W

 Electro Polished
-EP

Part Number	Size	Dia	Length
H-403-SV__	#4-40	0.112	3/16
H-404-SV__	#4-40	0.112	1/4
H-405-SV__	#4-40	0.112	5/16
H-406-SV__	#4-40	0.112	3/8
H-407-SV__	#4-40	0.112	7/16
H-408-SV__	#4-40	0.112	1/2
H-410-SV__	#4-40	0.112	5/8
H-412-SV__	#4-40	0.112	3/4
H-604-SV__	#6-32	0.138	1/4
H-605-SV__	#6-32	0.138	5/16
H-606-SV__	#6-32	0.138	3/8
H-607-SV__	#6-32	0.138	7/16
H-608-SV__	#6-32	0.138	1/2
H-610-SV__	#6-32	0.138	5/8
H-612-SV__	#6-32	0.138	3/4
H-616-SV__	#6-32	0.138	1
H-803-SV__	#8-32	0.164	3/16
H-804-SV__	#8-32	0.164	1/4
H-805-SV__	#8-32	0.164	5/16
H-806-SV__	#8-32	0.164	3/8
H-808-SV__	#8-32	0.164	1/2
H-810-SV__	#8-32	0.164	5/8
H-812-SV__	#8-32	0.164	3/4
H-814-SV__	#8-32	0.164	7/8
H-816-SV__	#8-32	0.164	1
H-1003-SV__	#10-32	0.190	3/16
H-1004-SV__	#10-32	0.190	1/4
H-1005-SV__	#10-32	0.190	5/16
H-1006-SV__	#10-32	0.190	3/8
H-1008-SV__	#10-32	0.190	1/2
H-1010-SV__	#10-32	0.190	5/8
H-1012-SV__	#10-32	0.190	3/4
H-1014-SV__	#10-32	0.190	7/8
H-1016-SV__	#10-32	0.190	1
H-1020-SV__	#10-32	0.190	1 1/4
H-2006-SV__	1/4-20	0.250	3/8
H-2008-SV__	1/4-20	0.250	1/2
H-2010-SV__	1/4-20	0.250	5/8
H-2012-SV__	1/4-20	0.250	3/4
H-2014-SV__	1/4-20	0.250	7/8
H-2016-SV__	1/4-20	0.250	1
H-2020-SV__	1/4-20	0.250	1 1/4

Part Number	Size	Dia	Length
H-2024-SV__	1/4-20	0.250	1 1/2
H-1808-SV__	5/16-18	0.313	1/2
H-1810-SV__	5/16-18	0.313	5/8
H-1812-SV__	5/16-18	0.313	3/4
H-1814-SV__	5/16-18	0.313	7/8
H-1816-SV__	5/16-18	0.313	1
H-1820-SV__	5/16-18	0.313	1 1/4
H-1824-SV__	5/16-18	0.313	1 1/2
H-1832-SV__	5/16-18	0.313	2
H-3108-SV__	5/16-24	0.313	1/2
H-3110-SV__	5/16-24	0.313	5/8
H-3112-SV__	5/16-24	0.313	3/4
H-3114-SV__	5/16-24	0.313	7/8
H-3116-SV__	5/16-24	0.313	1
H-3120-SV__	5/16-24	0.313	1 1/4
H-3124-SV__	5/16-24	0.313	1 1/2
H-3132-SV__	5/16-24	0.313	2



For detailed prints, tolerances, and variations
please email sales@ucomponents.com

Slot-Vented Screw, Set, Cup Point, Socket Drive


ASME B18.3 / 18-8 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
T-202-SV__	#2-56	0.086	1/8
T-203-SV__	#2-56	0.086	3/16
T-204-SV__	#2-56	0.086	1/4
T-205-SV__	#2-56	0.086	5/16
T-206-SV__	#2-56	0.086	3/8
T-207-SV__	#2-56	0.086	7/16
T-208-SV__	#2-56	0.086	1/2
T-210-SV__	#2-56	0.086	5/8
T-212-SV__	#2-56	0.086	3/4
T-402-SV__	#4-40	0.112	1/8
T-403-SV__	#4-40	0.112	3/16
T-404-SV__	#4-40	0.112	1/4
T-405-SV__	#4-40	0.112	5/16
T-406-SV__	#4-40	0.112	3/8
T-407-SV__	#4-40	0.112	7/16
T-408-SV__	#4-40	0.112	1/2
T-410-SV__	#4-40	0.112	5/8
T-412-SV__	#4-40	0.112	3/4
T-603-SV__	#6-32	0.138	3/16
T-604-SV__	#6-32	0.138	1/4
T-605-SV__	#6-32	0.138	5/16
T-606-SV__	#6-32	0.138	3/8
T-607-SV__	#6-32	0.138	7/16
T-608-SV__	#6-32	0.138	1/2
T-610-SV__	#6-32	0.138	5/8
T-612-SV__	#6-32	0.138	3/4
T-616-SV__	#6-32	0.138	1
T-804-SV__	#8-32	0.164	1/4
T-805-SV__	#8-32	0.164	5/16
T-806-SV__	#8-32	0.164	3/8
T-807-SV__	#8-32	0.164	7/16
T-808-SV__	#8-32	0.164	1/2
T-810-SV__	#8-32	0.164	5/8
T-812-SV__	#8-32	0.164	3/4
T-814-SV__	#8-32	0.164	7/8
T-816-SV__	#8-32	0.164	1
T-820-SV__	#8-32	0.164	1 1/4
T-1004-SV__	#10-32	0.190	1/4
T-1005-SV__	#10-32	0.190	5/16
T-1006-SV__	#10-32	0.190	3/8
T-1007-SV__	#10-32	0.190	7/16
T-1008-SV__	#10-32	0.190	1/2

Part Number	Size	Dia	Length
T-1010-SV__	#10-32	0.190	5/8
T-1012-SV__	#10-32	0.190	3/4
T-1014-SV__	#10-32	0.190	7/8
T-1016-SV__	#10-32	0.190	1
T-1018-SV__	#10-32	0.190	1 1/8
T-1020-SV__	#10-32	0.190	1 1/4
T-1024-SV__	#10-32	0.190	1 1/2
T-2004-SV__	1/4-20	0.250	1/4
T-2006-SV__	1/4-20	0.250	3/8
T-2008-SV__	1/4-20	0.250	1/2
T-2010-SV__	1/4-20	0.250	5/8
T-2012-SV__	1/4-20	0.250	3/4
T-2014-SV__	1/4-20	0.250	7/8
T-2016-SV__	1/4-20	0.250	1
T-2018-SV__	1/4-20	0.250	1 1/8
T-2020-SV__	1/4-20	0.250	1 1/4
T-2024-SV__	1/4-20	0.250	1 1/2



For detailed prints, tolerances, and variations
please email sales@ucomponents.com

Slot-Vented Screw, Fillister Head, Slotted Drive


ASME B18.6.3 / 18-8 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
FL-202-SV__	#2-56	0.086	1/8
FL-203-SV__	#2-56	0.086	3/16
FL-204-SV__	#2-56	0.086	1/4
FL-205-SV__	#2-56	0.086	5/16
FL-206-SV__	#2-56	0.086	3/8
FL-207-SV__	#2-56	0.086	7/16
FL-208-SV__	#2-56	0.086	1/2
FL-210-SV__	#2-56	0.086	5/8
FL-212-SV__	#2-56	0.086	3/4
FL-402-SV__	#4-40	0.112	1/8
FL-403-SV__	#4-40	0.112	3/16
FL-404-SV__	#4-40	0.112	1/4
FL-405-SV__	#4-40	0.112	5/16
FL-406-SV__	#4-40	0.112	3/8
FL-407-SV__	#4-40	0.112	7/16
FL-408-SV__	#4-40	0.112	1/2
FL-410-SV__	#4-40	0.112	5/8
FL-412-SV__	#4-40	0.112	3/4
FL-603-SV__	#6-32	0.138	3/16
FL-604-SV__	#6-32	0.138	1/4
FL-605-SV__	#6-32	0.138	5/16
FL-606-SV__	#6-32	0.138	3/8
FL-607-SV__	#6-32	0.138	7/16
FL-608-SV__	#6-32	0.138	1/2
FL-610-SV__	#6-32	0.138	5/8
FL-612-SV__	#6-32	0.138	3/4
FL-616-SV__	#6-32	0.138	1
FL-804-SV__	#8-32	0.138	1/4
FL-805-SV__	#8-32	0.138	5/16
FL-806-SV__	#8-32	0.138	3/8
FL-807-SV__	#8-32	0.138	7/16
FL-808-SV__	#8-32	0.138	1/2
FL-810-SV__	#8-32	0.138	5/8
FL-812-SV__	#8-32	0.138	3/4
FL-814-SV__	#8-32	0.138	7/8
FL-816-SV__	#8-32	0.138	1
FL-820-SV__	#8-32	0.138	1 1/4
FL-1004-SV__	#10-32	0.190	1/4
FL-1005-SV__	#10-32	0.190	5/16
FL-1006-SV__	#10-32	0.190	3/8
FL-1007-SV__	#10-32	0.190	7/16
FL-1008-SV__	#10-32	0.190	1/2

Part Number	Size	Dia	Length
FL-1010-SV__	#10-32	0.190	5/8
FL-1012-SV__	#10-32	0.190	3/4
FL-1014-SV__	#10-32	0.190	7/8
FL-1016-SV__	#10-32	0.190	1
FL-1018-SV__	#10-32	0.190	1 1/8
FL-1020-SV__	#10-32	0.190	1 1/4
FL-1024-SV__	#10-32	0.190	1 1/2
FL-2006-SV__	1/4-20	0.250	3/8
FL-2008-SV__	1/4-20	0.250	1/2
FL-2010-SV__	1/4-20	0.250	5/8
FL-2012-SV__	1/4-20	0.250	3/4
FL-2014-SV__	1/4-20	0.250	7/8
FL-2016-SV__	1/4-20	0.250	1
FL-2018-SV__	1/4-20	0.250	1 1/8
FL-2020-SV__	1/4-20	0.250	1 1/4
FL-2024-SV__	1/4-20	0.250	1 1/2



For detailed prints, tolerances, and variations
please email sales@ucomponents.com

Slot-Vented Screw, Pan Head, Phillips Drive


ASME B18.6.3 / 18-8 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
P-202-SV__	#2-56	0.086	1/8
P-203-SV__	#2-56	0.086	3/16
P-204-SV__	#2-56	0.086	1/4
P-205-SV__	#2-56	0.086	5/16
P-206-SV__	#2-56	0.086	3/8
P-207-SV__	#2-56	0.086	7/16
P-208-SV__	#2-56	0.086	1/2
P-210-SV__	#2-56	0.086	5/8
P-212-SV__	#2-56	0.086	3/4
P-402-SV__	#4-40	0.112	1/8
P-403-SV__	#4-40	0.112	3/16
P-404-SV__	#4-40	0.112	1/4
P-405-SV__	#4-40	0.112	5/16
P-406-SV__	#4-40	0.112	3/8
P-407-SV__	#4-40	0.112	7/16
P-408-SV__	#4-40	0.112	1/2
P-410-SV__	#4-40	0.112	5/8
P-412-SV__	#4-40	0.112	3/4
P-603-SV__	#6-32	0.138	3/16
P-604-SV__	#6-32	0.138	1/4
P-605-SV__	#6-32	0.138	5/16
P-606-SV__	#6-32	0.138	3/8
P-607-SV__	#6-32	0.138	7/16
P-608-SV__	#6-32	0.138	1/2
P-610-SV__	#6-32	0.138	5/8
P-612-SV__	#6-32	0.138	3/4
P-616-SV__	#6-32	0.138	1
P-804-SV__	#8-32	0.138	1/4
P-805-SV__	#8-32	0.138	5/16
P-806-SV__	#8-32	0.138	3/8
P-807-SV__	#8-32	0.138	7/16
P-808-SV__	#8-32	0.138	1/2
P-810-SV__	#8-32	0.138	5/8
P-812-SV__	#8-32	0.138	3/4
P-814-SV__	#8-32	0.138	7/8
P-816-SV__	#8-32	0.138	1
P-820-SV__	#8-32	0.138	1 1/4
P-1004-SV__	#10-32	0.190	1/4
P-1005-SV__	#10-32	0.190	5/16
P-1006-SV__	#10-32	0.190	3/8
P-1007-SV__	#10-32	0.190	7/16
P-1008-SV__	#10-32	0.190	1/2

Part Number	Size	Dia	Length
P-1010-SV__	#10-32	0.190	5/8
P-1012-SV__	#10-32	0.190	3/4
P-1014-SV__	#10-32	0.190	7/8
P-1016-SV__	#10-32	0.190	1
P-1018-SV__	#10-32	0.190	1 1/8
P-1020-SV__	#10-32	0.190	1 1/4
P-1024-SV__	#10-32	0.190	1 1/2
P-2004-SV__	1/4-20	0.250	1/4
P-2006-SV__	1/4-20	0.250	3/8
P-2008-SV__	1/4-20	0.250	1/2
P-2010-SV__	1/4-20	0.250	5/8
P-2012-SV__	1/4-20	0.250	3/4
P-2014-SV__	1/4-20	0.250	7/8
P-2016-SV__	1/4-20	0.250	1
P-2018-SV__	1/4-20	0.250	1 1/8
P-2020-SV__	1/4-20	0.250	1 1/4
P-2024-SV__	1/4-20	0.250	1 1/2



For detailed prints, tolerances, and variations
please email sales@ucomponents.com

Slot-Vented Screw, Pan Head, Slotted Drive


ASME B18.6.3 / 18-8 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------


Part Number	Size	Dia	Length
PS-202-SV__	#2-56	0.086	1/8
PS-203-SV__	#2-56	0.086	3/16
PS-204-SV__	#2-56	0.086	1/4
PS-205-SV__	#2-56	0.086	5/16
PS-206-SV__	#2-56	0.086	3/8
PS-207-SV__	#2-56	0.086	7/16
PS-208-SV__	#2-56	0.086	1/2
PS-210-SV__	#2-56	0.086	5/8
PS-212-SV__	#2-56	0.086	3/4
PS-402-SV__	#4-40	0.112	1/8
PS-403-SV__	#4-40	0.112	3/16
PS-404-SV__	#4-40	0.112	1/4
PS-405-SV__	#4-40	0.112	5/16
PS-406-SV__	#4-40	0.112	3/8
PS-407-SV__	#4-40	0.112	7/16
PS-408-SV__	#4-40	0.112	1/2
PS-410-SV__	#4-40	0.112	5/8
PS-412-SV__	#4-40	0.112	3/4
PS-603-SV__	#6-32	0.138	3/16
PS-604-SV__	#6-32	0.138	1/4
PS-605-SV__	#6-32	0.138	5/16
PS-606-SV__	#6-32	0.138	3/8
PS-607-SV__	#6-32	0.138	7/16
PS-608-SV__	#6-32	0.138	1/2
PS-610-SV__	#6-32	0.138	5/8
PS-612-SV__	#6-32	0.138	3/4
PS-616-SV__	#6-32	0.138	1
PS-804-SV__	#8-32	0.138	1/4
PS-805-SV__	#8-32	0.138	5/16
PS-806-SV__	#8-32	0.138	3/8
PS-807-SV__	#8-32	0.138	7/16
PS-808-SV__	#8-32	0.138	1/2
PS-810-SV__	#8-32	0.138	5/8
PS-812-SV__	#8-32	0.138	3/4
PS-814-SV__	#8-32	0.138	7/8
PS-816-SV__	#8-32	0.138	1
PS-820-SV__	#8-32	0.138	1 1/4
PS-1004-SV__	#10-32	0.190	1/4
PS-1005-SV__	#10-32	0.190	5/16
PS-1006-SV__	#10-32	0.190	3/8
PS-1007-SV__	#10-32	0.190	7/16
PS-1008-SV__	#10-32	0.190	1/2

Part Number	Size	Dia	Length
PS-1010-SV__	#10-32	0.190	5/8
PS-1012-SV__	#10-32	0.190	3/4
PS-1014-SV__	#10-32	0.190	7/8
PS-1016-SV__	#10-32	0.190	1
PS-1018-SV__	#10-32	0.190	1 1/8
PS-1020-SV__	#10-32	0.190	1 1/4
PS-1024-SV__	#10-32	0.190	1 1/2
PS-2004-SV__	1/4-20	0.250	1/4
PS-2006-SV__	1/4-20	0.250	3/8
PS-2008-SV__	1/4-20	0.250	1/2
PS-2010-SV__	1/4-20	0.250	5/8
PS-2012-SV__	1/4-20	0.250	3/4
PS-2014-SV__	1/4-20	0.250	7/8
PS-2016-SV__	1/4-20	0.250	1
PS-2018-SV__	1/4-20	0.250	1 1/8
PS-2020-SV__	1/4-20	0.250	1 1/4
PS-2024-SV__	1/4-20	0.250	1 1/2



For detailed prints, tolerances, and variations
please email sales@ucomponents.com

NON-VENTED SCREWS

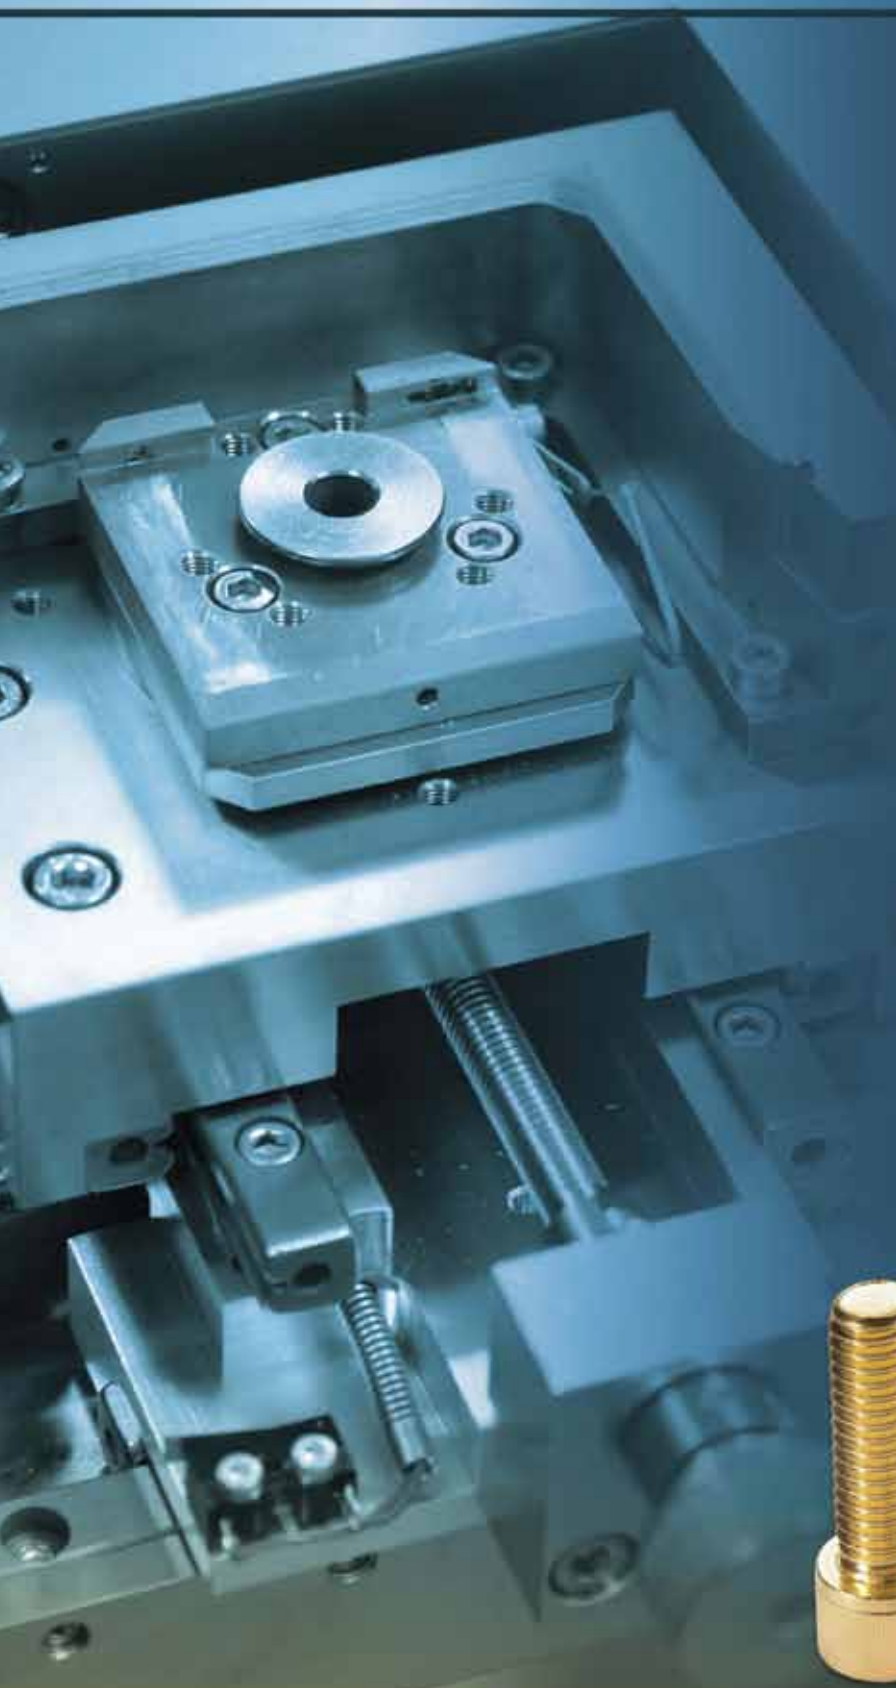

18700 Adams Ct. Morgan Hill, CA 95037
Phone: 408.782.1929 | Fax: 408.782.7995
Email: sales@ucccomponents.com
www.ucccomponents.com

INCH

Non-Vented Screw, Button Head, Socket Drive


ASME B18.3 / 18-8 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
BU-202-N__	#2-56	0.086	1/8
BU-203-N__	#2-56	0.086	3/16
BU-204-N__	#2-56	0.086	1/4
BU-205-N__	#2-56	0.086	5/16
BU-206-N__	#2-56	0.086	3/8
BU-207-N__	#2-56	0.086	7/16
BU-208-N__	#2-56	0.086	1/2
BU-210-N__	#2-56	0.086	5/8
BU-212-N__	#2-56	0.086	3/4
BU-402-N__	#4-40	0.112	1/8
BU-403-N__	#4-40	0.112	3/16
BU-404-N__	#4-40	0.112	1/4
BU-405-N__	#4-40	0.112	5/16
BU-406-N__	#4-40	0.112	3/8
BU-407-N__	#4-40	0.112	7/16
BU-408-N__	#4-40	0.112	1/2
BU-410-N__	#4-40	0.112	5/8
BU-412-N__	#4-40	0.112	3/4
BU-603-N__	#6-32	0.138	3/16
BU-604-N__	#6-32	0.138	1/4
BU-605-N__	#6-32	0.138	5/16
BU-606-N__	#6-32	0.138	3/8
BU-607-N__	#6-32	0.138	7/16
BU-608-N__	#6-32	0.138	1/2
BU-610-N__	#6-32	0.138	5/8
BU-612-N__	#6-32	0.138	3/4
BU-614-N__	#6-32	0.138	7/8
BU-616-N__	#6-32	0.138	1
BU-804-N__	#8-32	0.164	1/4
BU-805-N__	#8-32	0.164	5/16
BU-806-N__	#8-32	0.164	3/8
BU-807-N__	#8-32	0.164	7/16
BU-808-N__	#8-32	0.164	1/2
BU-810-N__	#8-32	0.164	5/8
BU-812-N__	#8-32	0.164	3/4
BU-814-N__	#8-32	0.164	7/8
BU-816-N__	#8-32	0.164	1
BU-820-N__	#8-32	0.164	1 1/4
BU-1004-N__	#10-32	0.190	1/4
BU-1005-N__	#10-32	0.190	5/16
BU-1006-N__	#10-32	0.190	3/8
BU-1007-N__	#10-32	0.190	7/16

Part Number	Size	Dia	Length
BU-1008-N__	#10-32	0.190	1/2
BU-1010-N__	#10-32	0.190	5/8
BU-1012-N__	#10-32	0.190	3/4
BU-1014-N__	#10-32	0.190	7/8
BU-1016-N__	#10-32	0.190	1
BU-1018-N__	#10-32	0.190	1 1/8
BU-1020-N__	#10-32	0.190	1 1/4
BU-1024-N__	#10-32	0.190	1 1/2
BU-2004-N__	1/4-20	0.250	1/4
BU-2006-N__	1/4-20	0.250	3/8
BU-2008-N__	1/4-20	0.250	1/2
BU-2010-N__	1/4-20	0.250	5/8
BU-2012-N__	1/4-20	0.250	3/4
BU-2014-N__	1/4-20	0.250	7/8
BU-2016-N__	1/4-20	0.250	1
BU-2018-N__	1/4-20	0.250	1 1/8
BU-2020-N__	1/4-20	0.250	1 1/4
BU-2024-N__	1/4-20	0.250	1 1/2

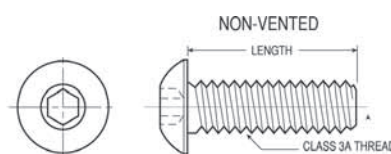

For detailed prints, tolerances, and variations
please email sales@ucomponents.com

Non-Vented Screw, Socket Head Cap

ASME B18.3 / 18-8 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned
(No-suffix)

Silver plated
-A

Gold plated
-AU

Nickel plated
-K


MoS2 coated
-C

WS2 coated
-W

Electro Polished
-EP

Part Number	Size	Dia	Length
C-202-N__	#2-56	0.086	1/8
C-203-N__	#2-56	0.086	3/16
C-204-N__	#2-56	0.086	1/4
C-205-N__	#2-56	0.086	5/16
C-206-N__	#2-56	0.086	3/8
C-207-N__	#2-56	0.086	7/16
C-208-N__	#2-56	0.086	1/2
C-210-N__	#2-56	0.086	5/8
C-212-N__	#2-56	0.086	3/4
C-402-N__	#4-40	0.112	1/8
C-403-N__	#4-40	0.112	3/16
C-404-N__	#4-40	0.112	1/4
C-405-N__	#4-40	0.112	5/16
C-406-N__	#4-40	0.112	3/8
C-407-N__	#4-40	0.112	7/16
C-408-N__	#4-40	0.112	1/2
C-410-N__	#4-40	0.112	5/8
C-412-N__	#4-40	0.112	3/4
C-414-N__	#4-40	0.112	7/8
C-416-N__	#4-40	0.112	1
C-504-N__	#5-40	0.125	1/4
C-505-N__	#5-40	0.125	5/16
C-506-N__	#5-40	0.125	3/8
C-508-N__	#5-40	0.125	1/2
C-510-N__	#5-40	0.125	5/8
C-512-N__	#5-40	0.125	3/4
C-514-N__	#5-40	0.125	7/8
C-516-N__	#5-40	0.125	1
C-602-N__	#6-32	0.138	1/8
C-603-N__	#6-32	0.138	3/16
C-604-N__	#6-32	0.138	1/4
C-605-N__	#6-32	0.138	5/16
C-606-N__	#6-32	0.138	3/8
C-607-N__	#6-32	0.138	7/16
C-608-N__	#6-32	0.138	1/2
C-609-N__	#6-32	0.138	9/16
C-610-N__	#6-32	0.138	5/8
C-612-N__	#6-32	0.138	3/4
C-614-N__	#6-32	0.138	7/8
C-616-N__	#6-32	0.138	1
C-618-N__	#6-32	0.138	1 1/8
C-620-N__	#6-32	0.138	1 1/4

Part Number	Size	Dia	Length
C-803-N__	#8-32	0.164	3/16
C-804-N__	#8-32	0.164	1/4
C-805-N__	#8-32	0.164	5/16
C-806-N__	#8-32	0.164	3/8
C-807-N__	#8-32	0.164	7/16
C-808-N__	#8-32	0.164	1/2
C-809-N__	#8-32	0.164	9/16
C-810-N__	#8-32	0.164	5/8
C-812-N__	#8-32	0.164	3/4
C-814-N__	#8-32	0.164	7/8
C-816-N__	#8-32	0.164	1
C-818-N__	#8-32	0.164	1 1/8
C-820-N__	#8-32	0.164	1 1/4
C-824-N__	#8-32	0.164	1 1/2
C-832-N__	#8-32	0.164	2



For detailed prints, tolerances, and variations
please email sales@ucomponents.com

Non-Vented Screw, Socket Head Cap


ASME B18.3 / 18-8 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
C-2404-N__	#10-24	0.190	1/4
C-2406-N__	#10-24	0.190	3/8
C-2408-N__	#10-24	0.190	1/2
C-2410-N__	#10-24	0.190	5/8
C-2412-N__	#10-24	0.190	3/4
C-2414-N__	#10-24	0.190	7/8
C-2416-N__	#10-24	0.190	1
C-2418-N__	#10-24	0.190	1 1/8
C-2420-N__	#10-24	0.190	1 1/4
C-2422-N__	#10-24	0.190	1 3/8
C-2424-N__	#10-24	0.190	1 1/2
C-1003-N__	#10-32	0.190	3/16
C-1004-N__	#10-32	0.190	1/4
C-1005-N__	#10-32	0.190	5/16
C-1006-N__	#10-32	0.190	3/8
C-1007-N__	#10-32	0.190	7/16
C-1008-N__	#10-32	0.190	1/2
C-1009-N__	#10-32	0.190	9/16
C-1010-N__	#10-32	0.190	5/8
C-1011-N__	#10-32	0.190	11/16
C-1012-N__	#10-32	0.190	3/4
C-1014-N__	#10-32	0.190	7/8
C-1016-N__	#10-32	0.190	1
C-1018-N__	#10-32	0.190	1 1/8
C-1020-N__	#10-32	0.190	1 1/4
C-1022-N__	#10-32	0.190	1 3/8
C-1024-N__	#10-32	0.190	1 1/2
C-1026-N__	#10-32	0.190	1 5/8
C-1028-N__	#10-32	0.190	1 3/4
C-1032-N__	#10-32	0.190	2
C-2004-N__	1/4-20	0.250	1/4
C-2005-N__	1/4-20	0.250	5/16
C-2006-N__	1/4-20	0.250	3/8
C-2008-N__	1/4-20	0.250	1/2
C-2010-N__	1/4-20	0.250	5/8
C-2012-N__	1/4-20	0.250	3/4
C-2014-N__	1/4-20	0.250	7/8
C-2016-N__	1/4-20	0.250	1
C-2018-N__	1/4-20	0.250	1 1/8
C-2020-N__	1/4-20	0.250	1 1/4
C-2022-N__	1/4-20	0.250	1 3/8
C-2024-N__	1/4-20	0.250	1 1/2

Part Number	Size	Dia	Length
C-2026-N__	1/4-20	0.250	1 5/8
C-2028-N__	1/4-20	0.250	1 3/4
C-2032-N__	1/4-20	0.250	2
C-2040-N__	1/4-20	0.250	2 1/2
C-2806-N__	1/4-28	0.250	3/8
C-2808-N__	1/4-28	0.250	1/2
C-2810-N__	1/4-28	0.250	5/8
C-2812-N__	1/4-28	0.250	3/4
C-2814-N__	1/4-28	0.250	7/8
C-2816-N__	1/4-28	0.250	1
C-2820-N__	1/4-28	0.250	1 1/4
C-2824-N__	1/4-28	0.250	1 1/2



For detailed prints, tolerances, and variations
please email sales@ucomponents.com


Non-Vented Screw, Socket Head Cap

ASME B18.3 / 18-8 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
C-1808-N__	5/16-18	0.313	1/2
C-1810-N__	5/16-18	0.313	5/8
C-1812-N__	5/16-18	0.313	3/4
C-1814-N__	5/16-18	0.313	7/8
C-1816-N__	5/16-18	0.313	1
C-1820-N__	5/16-18	0.313	1 1/4
C-1824-N__	5/16-18	0.313	1 1/2
C-1828-N__	5/16-18	0.313	1 3/4
C-1832-N__	5/16-18	0.313	2
C-3108-N__	5/16-24	0.313	1/2
C-3110-N__	5/16-24	0.313	5/8
C-3112-N__	5/16-24	0.313	3/4
C-3114-N__	5/16-24	0.313	7/8
C-3116-N__	5/16-24	0.313	1
C-3120-N__	5/16-24	0.313	1 1/4
C-3124-N__	5/16-24	0.313	1 1/2
C-3128-N__	5/16-24	0.313	1 3/4
C-3132-N__	5/16-24	0.313	2
C-1608-N__	3/8-16	0.375	1/2
C-1610-N__	3/8-16	0.375	5/8
C-1612-N__	3/8-16	0.375	3/4
C-1614-N__	3/8-16	0.375	7/8
C-1624-N__	3/8-16	0.375	1 1/2
C-1628-N__	3/8-16	0.375	1 3/4
C-1632-N__	3/8-16	0.375	2
C-3808-N__	3/8-24	0.375	1/2
C-3810-N__	3/8-24	0.375	5/8
C-3812-N__	3/8-24	0.375	3/4
C-3814-N__	3/8-24	0.375	7/8
C-3816-N__	3/8-24	0.375	1
C-3820-N__	3/8-24	0.375	1 1/4
C-3824-N__	3/8-24	0.375	1 1/2
C-3828-N__	3/8-24	0.375	1 3/4
C-3832-N__	3/8-24	0.375	2
C-1312-N__	1/2-13	0.500	3/4
C-1316-N__	1/2-13	0.500	1
C-1320-N__	1/2-13	0.500	1 1/4
C-1324-N__	1/2-13	0.500	1 1/2
C-1326-N__	1/2-13	0.500	1 5/8
C-1328-N__	1/2-13	0.500	1 3/4
C-1332-N__	1/2-13	0.500	2



For detailed prints, tolerances, and variations
please email sales@ucomponents.com

Non-Vented Screw, Flat Head, Phillips Drive


ASME B18.6.3 / 18-8 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
F-202-N__	#2-56	0.086	1/8
F-203-N__	#2-56	0.086	3/16
F-204-N__	#2-56	0.086	1/4
F-205-N__	#2-56	0.086	5/16
F-206-N__	#2-56	0.086	3/8
F-207-N__	#2-56	0.086	7/16
F-208-N__	#2-56	0.086	1/2
F-210-N__	#2-56	0.086	5/8
F-212-N__	#2-56	0.086	3/4
F-402-N__	#4-40	0.112	1/8
F-403-N__	#4-40	0.112	3/16
F-404-N__	#4-40	0.112	1/4
F-405-N__	#4-40	0.112	5/16
F-406-N__	#4-40	0.112	3/8
F-407-N__	#4-40	0.112	7/16
F-408-N__	#4-40	0.112	1/2
F-410-N__	#4-40	0.112	5/8
F-412-N__	#4-40	0.112	3/4
F-603-N__	#6-32	0.138	3/16
F-604-N__	#6-32	0.138	1/4
F-605-N__	#6-32	0.138	5/16
F-606-N__	#6-32	0.138	3/8
F-607-N__	#6-32	0.138	7/16
F-608-N__	#6-32	0.138	1/2
F-610-N__	#6-32	0.138	5/8
F-612-N__	#6-32	0.138	3/4
F-614-N__	#6-32	0.138	7/8
F-616-N__	#6-32	0.138	1
F-804-N__	#8-32	0.164	1/4
F-805-N__	#8-32	0.164	5/16
F-806-N__	#8-32	0.164	3/8
F-807-N__	#8-32	0.164	7/16
F-808-N__	#8-32	0.164	1/2
F-810-N__	#8-32	0.164	5/8
F-812-N__	#8-32	0.164	3/4
F-814-N__	#8-32	0.164	7/8
F-816-N__	#8-32	0.164	1
F-820-N__	#8-32	0.164	1 1/4
F-1004-N__	#10-32	0.190	1/4
F-1005-N__	#10-32	0.190	5/16
F-1006-N__	#10-32	0.190	3/8
F-1007-N__	#10-32	0.190	7/16

Part Number	Size	Dia	Length
F-1008-N__	#10-32	0.190	1/2
F-1010-N__	#10-32	0.190	5/8
F-1012-N__	#10-32	0.190	3/4
F-1014-N__	#10-32	0.190	7/8
F-1016-N__	#10-32	0.190	1
F-1018-N__	#10-32	0.190	1 1/8
F-1020-N__	#10-32	0.190	1 1/4
F-1024-N__	#10-32	0.190	1 1/2
F-2004-N__	1/4-20	0.250	1/4
F-2006-N__	1/4-20	0.250	3/8
F-2008-N__	1/4-20	0.250	1/2
F-2010-N__	1/4-20	0.250	5/8
F-2012-N__	1/4-20	0.250	3/4
F-2014-N__	1/4-20	0.250	7/8
F-2016-N__	1/4-20	0.250	1
F-2018-N__	1/4-20	0.250	1 1/8
F-2020-N__	1/4-20	0.250	1 1/4
F-2024-N__	1/4-20	0.250	1 1/2

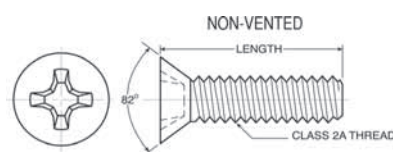

For detailed prints, tolerances, and variations
please email sales@ucomponents.com

Non-Vented Screw, Flat Head, Socket Drive


ASME B18.3 / 18-8 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
FA-202-N__	#2-56	0.086	1/8
FA-203-N__	#2-56	0.086	3/16
FA-204-N__	#2-56	0.086	1/4
FA-205-N__	#2-56	0.086	5/16
FA-206-N__	#2-56	0.086	3/8
FA-207-N__	#2-56	0.086	7/16
FA-208-N__	#2-56	0.086	1/2
FA-210-N__	#2-56	0.086	5/8
FA-212-N__	#2-56	0.086	3/4
FA-402-N__	#4-40	0.112	1/8
FA-403-N__	#4-40	0.112	3/16
FA-404-N__	#4-40	0.112	1/4
FA-405-N__	#4-40	0.112	5/16
FA-406-N__	#4-40	0.112	3/8
FA-407-N__	#4-40	0.112	7/16
FA-408-N__	#4-40	0.112	1/2
FA-410-N__	#4-40	0.112	5/8
FA-412-N__	#4-40	0.112	3/4
FA-603-N__	#6-32	0.138	3/16
FA-604-N__	#6-32	0.138	1/4
FA-605-N__	#6-32	0.138	5/16
FA-606-N__	#6-32	0.138	3/8
FA-607-N__	#6-32	0.138	7/16
FA-608-N__	#6-32	0.138	1/2
FA-610-N__	#6-32	0.138	5/8
FA-612-N__	#6-32	0.138	3/4
FA-614-N__	#6-32	0.138	7/8
FA-616-N__	#6-32	0.138	1
FA-804-N__	#8-32	0.164	1/4
FA-805-N__	#8-32	0.164	5/16
FA-806-N__	#8-32	0.164	3/8
FA-807-N__	#8-32	0.164	7/16
FA-808-N__	#8-32	0.164	1/2
FA-810-N__	#8-32	0.164	5/8
FA-812-N__	#8-32	0.164	3/4
FA-814-N__	#8-32	0.164	7/8
FA-816-N__	#8-32	0.164	1
FA-820-N__	#8-32	0.164	1 1/4
FA-1004-N__	#10-32	0.190	1/4
FA-1005-N__	#10-32	0.190	5/16
FA-1006-N__	#10-32	0.190	3/8
FA-1007-N__	#10-32	0.190	7/16

Part Number	Size	Dia	Length
FA-1008-N__	#10-32	0.190	1/2
FA-1010-N__	#10-32	0.190	5/8
FA-1012-N__	#10-32	0.190	3/4
FA-1014-N__	#10-32	0.190	7/8
FA-1016-N__	#10-32	0.190	1
FA-1018-N__	#10-32	0.190	1 1/8
FA-1020-N__	#10-32	0.190	1 1/4
FA-1024-N__	#10-32	0.190	1 1/2
FA-2004-N__	1/4-20	0.250	1/4
FA-2006-N__	1/4-20	0.250	3/8
FA-2008-N__	1/4-20	0.250	1/2
FA-2010-N__	1/4-20	0.250	5/8
FA-2012-N__	1/4-20	0.250	3/4
FA-2014-N__	1/4-20	0.250	7/8
FA-2016-N__	1/4-20	0.250	1
FA-2018-N__	1/4-20	0.250	1 1/8
FA-2020-N__	1/4-20	0.250	1 1/4
FA-2024-N__	1/4-20	0.250	1 1/2



For detailed prints, tolerances, and variations
please email sales@ucomponents.com

Non-Vented Screw, Flat Head, Slotted Drive


ASME B18.6.3 / 18-8 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
FS-202-N__	#2-56	0.086	1/8
FS-203-N__	#2-56	0.086	3/16
FS-204-N__	#2-56	0.086	1/4
FS-205-N__	#2-56	0.086	5/16
FS-206-N__	#2-56	0.086	3/8
FS-207-N__	#2-56	0.086	7/16
FS-208-N__	#2-56	0.086	1/2
FS-210-N__	#2-56	0.086	5/8
FS-212-N__	#2-56	0.086	3/4
FS-402-N__	#4-40	0.112	1/8
FS-403-N__	#4-40	0.112	3/16
FS-404-N__	#4-40	0.112	1/4
FS-405-N__	#4-40	0.112	5/16
FS-406-N__	#4-40	0.112	3/8
FS-407-N__	#4-40	0.112	7/16
FS-408-N__	#4-40	0.112	1/2
FS-410-N__	#4-40	0.112	5/8
FS-412-N__	#4-40	0.112	3/4
FS-603-N__	#6-32	0.138	3/16
FS-604-N__	#6-32	0.138	1/4
FS-605-N__	#6-32	0.138	5/16
FS-606-N__	#6-32	0.138	3/8
FS-607-N__	#6-32	0.138	7/16
FS-608-N__	#6-32	0.138	1/2
FS-610-N__	#6-32	0.138	5/8
FS-612-N__	#6-32	0.138	3/4
FS-614-N__	#6-32	0.138	7/8
FS-616-N__	#6-32	0.138	1
FS-804-N__	#8-32	0.164	1/4
FS-805-N__	#8-32	0.164	5/16
FS-806-N__	#8-32	0.164	3/8
FS-807-N__	#8-32	0.164	7/16
FS-808-N__	#8-32	0.164	1/2
FS-810-N__	#8-32	0.164	5/8
FS-812-N__	#8-32	0.164	3/4
FS-814-N__	#8-32	0.164	7/8
FS-816-N__	#8-32	0.164	1
FS-820-N__	#8-32	0.164	1 1/4
FS-1004-N__	#10-32	0.190	1/4
FS-1005-N__	#10-32	0.190	5/16
FS-1006-N__	#10-32	0.190	3/8
FS-1007-N__	#10-32	0.190	7/16

Part Number	Size	Dia	Length
FS-1008-N__	#10-32	0.190	1/2
FS-1010-N__	#10-32	0.190	5/8
FS-1012-N__	#10-32	0.190	3/4
FS-1014-N__	#10-32	0.190	7/8
FS-1016-N__	#10-32	0.190	1
FS-1018-N__	#10-32	0.190	1 1/8
FS-1020-N__	#10-32	0.190	1 1/4
FS-1024-N__	#10-32	0.190	1 1/2
FS-2004-N__	1/4-20	0.250	1/4
FS-2006-N__	1/4-20	0.250	3/8
FS-2008-N__	1/4-20	0.250	1/2
FS-2010-N__	1/4-20	0.250	5/8
FS-2012-N__	1/4-20	0.250	3/4
FS-2014-N__	1/4-20	0.250	7/8
FS-2016-N__	1/4-20	0.250	1
FS-2018-N__	1/4-20	0.250	1 1/8
FS-2020-N__	1/4-20	0.250	1 1/4
FS-2024-N__	1/4-20	0.250	1 1/2



For detailed prints, tolerances, and variations
please email sales@ucomponents.com

Non-Vented Screw, Hex Head

ASME B18.6.3 / B18.2.1 / 18-8 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned
(No-suffix)

Silver plated
-A

Gold plated
-AU

Nickel plated
-K


MoS2 coated
-C

WS2 coated
-W

Electro Polished
-EP

Part Number	Size	Dia	Length
H-403-N__	#4-40	0.112	3/16
H-404-N__	#4-40	0.112	1/4
H-405-N__	#4-40	0.112	5/16
H-406-N__	#4-40	0.112	3/8
H-407-N__	#4-40	0.112	7/16
H-408-N__	#4-40	0.112	1/2
H-410-N__	#4-40	0.112	5/8
H-412-N__	#4-40	0.112	3/4
H-604-N__	#6-32	0.138	1/4
H-605-N__	#6-32	0.138	5/16
H-606-N__	#6-32	0.138	3/8
H-607-N__	#6-32	0.138	7/16
H-608-N__	#6-32	0.138	1/2
H-610-N__	#6-32	0.138	5/8
H-612-N__	#6-32	0.138	3/4
H-616-N__	#6-32	0.138	1
H-803-N__	#8-32	0.164	3/16
H-804-N__	#8-32	0.164	1/4
H-805-N__	#8-32	0.164	5/16
H-806-N__	#8-32	0.164	3/8
H-808-N__	#8-32	0.164	1/2
H-810-N__	#8-32	0.164	5/8
H-812-N__	#8-32	0.164	3/4
H-814-N__	#8-32	0.164	7/8
H-816-N__	#8-32	0.164	1
H-820-N__	#8-32	0.164	1 1/4
H-1003-N__	#10-32	0.190	3/16
H-1004-N__	#10-32	0.190	1/4
H-1005-N__	#10-32	0.190	5/16
H-1006-N__	#10-32	0.190	3/8
H-1008-N__	#10-32	0.190	1/2
H-1010-N__	#10-32	0.190	5/8
H-1012-N__	#10-32	0.190	3/4
H-1014-N__	#10-32	0.190	7/8
H-1016-N__	#10-32	0.190	1
H-1020-N__	#10-32	0.190	1 1/4
H-2006-N__	1/4-20	0.250	3/8
H-2008-N__	1/4-20	0.250	1/2
H-2010-N__	1/4-20	0.250	5/8
H-2012-N__	1/4-20	0.250	3/4
H-2014-N__	1/4-20	0.250	7/8
H-2016-N__	1/4-20	0.250	1

Part Number	Size	Dia	Length
H-2020-N__	1/4-20	0.250	1 1/4
H-2024-N__	1/4-20	0.250	1 1/2
H-1808-N__	5/16-18	0.313	1/2
H-1810-N__	5/16-18	0.313	5/8
H-1812-N__	5/16-18	0.313	3/4
H-1814-N__	5/16-18	0.313	7/8
H-1816-N__	5/16-18	0.313	1
H-1820-N__	5/16-18	0.313	1 1/4
H-1824-N__	5/16-18	0.313	1 1/2
H-1832-N__	5/16-18	0.313	2
H-3108-N__	5/16-24	0.313	1/2
H-3110-N__	5/16-24	0.313	5/8
H-3112-N__	5/16-24	0.313	3/4
H-3114-N__	5/16-24	0.313	7/8
H-3116-N__	5/16-24	0.313	1
H-3120-N__	5/16-24	0.313	1 1/4
H-3124-N__	5/16-24	0.313	1 1/2
H-3132-N__	5/16-24	0.313	2



For detailed prints, tolerances, and variations
please email sales@uccomponents.com

Non-Vented Screw, Set, Cup Point, Socket Drive


ASME B18.3 / 18-8 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
T-202-N__	#2-56	0.086	1/8
T-203-N__	#2-56	0.086	3/16
T-204-N__	#2-56	0.086	1/4
T-205-N__	#2-56	0.086	5/16
T-206-N__	#2-56	0.086	3/8
T-207-N__	#2-56	0.086	7/16
T-208-N__	#2-56	0.086	1/2
T-210-N__	#2-56	0.086	5/8
T-212-N__	#2-56	0.086	3/4
T-402-N__	#4-40	0.112	1/8
T-403-N__	#4-40	0.112	3/16
T-404-N__	#4-40	0.112	1/4
T-405-N__	#4-40	0.112	5/16
T-406-N__	#4-40	0.112	3/8
T-407-N__	#4-40	0.112	7/16
T-408-N__	#4-40	0.112	1/2
T-410-N__	#4-40	0.112	5/8
T-412-N__	#4-40	0.112	3/4
T-603-N__	#6-32	0.138	3/16
T-604-N__	#6-32	0.138	1/4
T-605-N__	#6-32	0.138	5/16
T-606-N__	#6-32	0.138	3/8
T-607-N__	#6-32	0.138	7/16
T-608-N__	#6-32	0.138	1/2
T-610-N__	#6-32	0.138	5/8
T-612-N__	#6-32	0.138	3/4
T-614-N__	#6-32	0.138	7/8
T-616-N__	#6-32	0.138	1
T-804-N__	#8-32	0.164	1/4
T-805-N__	#8-32	0.164	5/16
T-806-N__	#8-32	0.164	3/8
T-807-N__	#8-32	0.164	7/16
T-808-N__	#8-32	0.164	1/2
T-810-N__	#8-32	0.164	5/8
T-812-N__	#8-32	0.164	3/4
T-814-N__	#8-32	0.164	7/8
T-816-N__	#8-32	0.164	1
T-820-N__	#8-32	0.164	1 1/4
T-1004-N__	#10-32	0.190	1/4
T-1005-N__	#10-32	0.190	5/16
T-1006-N__	#10-32	0.190	3/8
T-1007-N__	#10-32	0.190	7/16

Part Number	Size	Dia	Length
T-1008-N__	#10-32	0.190	1/2
T-1010-N__	#10-32	0.190	5/8
T-1012-N__	#10-32	0.190	3/4
T-1014-N__	#10-32	0.190	7/8
T-1016-N__	#10-32	0.190	1
T-1018-N__	#10-32	0.190	1 1/8
T-1020-N__	#10-32	0.190	1 1/4
T-1024-N__	#10-32	0.190	1 1/2
T-2004-N__	1/4-20	0.250	1/4
T-2006-N__	1/4-20	0.250	3/8
T-2008-N__	1/4-20	0.250	1/2
T-2010-N__	1/4-20	0.250	5/8
T-2012-N__	1/4-20	0.250	3/4
T-2014-N__	1/4-20	0.250	7/8
T-2016-N__	1/4-20	0.250	1
T-2018-N__	1/4-20	0.250	1 1/8
T-2020-N__	1/4-20	0.250	1 1/4
T-2024-N__	1/4-20	0.250	1 1/2

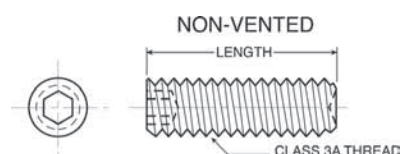

For detailed prints, tolerances, and variations
please email sales@ucomponents.com

Non-Vented Screw, Fillister Head, Slotted Drive


ASME B18.6.3 / 18-8 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
FL-202-N__	#2-56	0.086	1/8
FL-203-N__	#2-56	0.086	3/16
FL-204-N__	#2-56	0.086	1/4
FL-205-N__	#2-56	0.086	5/16
FL-206-N__	#2-56	0.086	3/8
FL-207-N__	#2-56	0.086	7/16
FL-208-N__	#2-56	0.086	1/2
FL-210-N__	#2-56	0.086	5/8
FL-212-N__	#2-56	0.086	3/4
FL-402-N__	#4-40	0.112	1/8
FL-403-N__	#4-40	0.112	3/16
FL-404-N__	#4-40	0.112	1/4
FL-405-N__	#4-40	0.112	5/16
FL-406-N__	#4-40	0.112	3/8
FL-407-N__	#4-40	0.112	7/16
FL-408-N__	#4-40	0.112	1/2
FL-410-N__	#4-40	0.112	5/8
FL-412-N__	#4-40	0.112	3/4
FL-603-N__	#6-32	0.138	3/16
FL-604-N__	#6-32	0.138	1/4
FL-605-N__	#6-32	0.138	5/16
FL-606-N__	#6-32	0.138	3/8
FL-607-N__	#6-32	0.138	7/16
FL-608-N__	#6-32	0.138	1/2
FL-610-N__	#6-32	0.138	5/8
FL-612-N__	#6-32	0.138	3/4
FL-614-N__	#6-32	0.138	7/8
FL-616-N__	#6-32	0.138	1
FL-804-N__	#8-32	0.164	1/4
FL-805-N__	#8-32	0.164	5/16
FL-806-N__	#8-32	0.164	3/8
FL-807-N__	#8-32	0.164	7/16
FL-808-N__	#8-32	0.164	1/2
FL-810-N__	#8-32	0.164	5/8
FL-812-N__	#8-32	0.164	3/4
FL-814-N__	#8-32	0.164	7/8
FL-816-N__	#8-32	0.164	1
FL-820-N__	#8-32	0.164	1 1/4
FL-1004-N__	#10-32	0.190	1/4
FL-1005-N__	#10-32	0.190	5/16
FL-1006-N__	#10-32	0.190	3/8
FL-1007-N__	#10-32	0.190	7/16

Part Number	Size	Dia	Length
FL-1008-N__	#10-32	0.190	1/2
FL-1010-N__	#10-32	0.190	5/8
FL-1012-N__	#10-32	0.190	3/4
FL-1014-N__	#10-32	0.190	7/8
FL-1016-N__	#10-32	0.190	1
FL-1018-N__	#10-32	0.190	1 1/8
FL-1020-N__	#10-32	0.190	1 1/4
FL-1024-N__	#10-32	0.190	1 1/2
FL-2004-N__	1/4-20	0.250	1/4
FL-2006-N__	1/4-20	0.250	3/8
FL-2008-N__	1/4-20	0.250	1/2
FL-2010-N__	1/4-20	0.250	5/8
FL-2012-N__	1/4-20	0.250	3/4
FL-2014-N__	1/4-20	0.250	7/8
FL-2016-N__	1/4-20	0.250	1
FL-2018-N__	1/4-20	0.250	1 1/8
FL-2020-N__	1/4-20	0.250	1 1/4
FL-2024-N__	1/4-20	0.250	1 1/2



For detailed prints, tolerances, and variations
please email sales@ucomponents.com

Non-Vented Screw, Pan Head, Phillips Drive


ASME B18.6.3 / 18-8 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
P-202-N__	#2-56	0.086	1/8
P-203-N__	#2-56	0.086	3/16
P-204-N__	#2-56	0.086	1/4
P-205-N__	#2-56	0.086	5/16
P-206-N__	#2-56	0.086	3/8
P-207-N__	#2-56	0.086	7/16
P-208-N__	#2-56	0.086	1/2
P-210-N__	#2-56	0.086	5/8
P-212-N__	#2-56	0.086	3/4
P-402-N__	#4-40	0.112	1/8
P-403-N__	#4-40	0.112	3/16
P-404-N__	#4-40	0.112	1/4
P-405-N__	#4-40	0.112	5/16
P-406-N__	#4-40	0.112	3/8
P-407-N__	#4-40	0.112	7/16
P-408-N__	#4-40	0.112	1/2
P-410-N__	#4-40	0.112	5/8
P-412-N__	#4-40	0.112	3/4
P-602-N__	#6-32	0.138	1/8
P-603-N__	#6-32	0.138	3/16
P-604-N__	#6-32	0.138	1/4
P-605-N__	#6-32	0.138	5/16
P-606-N__	#6-32	0.138	3/8
P-607-N__	#6-32	0.138	7/16
P-608-N__	#6-32	0.138	1/2
P-610-N__	#6-32	0.138	5/8
P-612-N__	#6-32	0.138	3/4
P-614-N__	#6-32	0.138	7/8
P-616-N__	#6-32	0.138	1
P-803-N__	#8-32	0.164	3/16
P-804-N__	#8-32	0.164	1/4
P-805-N__	#8-32	0.164	5/16
P-806-N__	#8-32	0.164	3/8
P-807-N__	#8-32	0.164	7/16
P-808-N__	#8-32	0.164	1/2
P-810-N__	#8-32	0.164	5/8
P-812-N__	#8-32	0.164	3/4
P-814-N__	#8-32	0.164	7/8
P-816-N__	#8-32	0.164	1
P-818-N__	#8-32	0.164	1 1/8
P-820-N__	#8-32	0.164	1 1/4
P-1004-N__	#10-32	0.190	1/4

Part Number	Size	Dia	Length
P-1005-N__	#10-32	0.190	5/16
P-1006-N__	#10-32	0.190	3/8
P-1007-N__	#10-32	0.190	7/16
P-1008-N__	#10-32	0.190	1/2
P-1010-N__	#10-32	0.190	5/8
P-1012-N__	#10-32	0.190	3/4
P-1014-N__	#10-32	0.190	7/8
P-1016-N__	#10-32	0.190	1
P-1018-N__	#10-32	0.190	1 1/8
P-1020-N__	#10-32	0.190	1 1/4
P-1022-N__	#10-32	0.190	1 3/8
P-1024-N__	#10-32	0.190	1 1/2
P-2004-N__	1/4-20	0.250	1/4
P-2006-N__	1/4-20	0.250	3/8
P-2008-N__	1/4-20	0.250	1/2
P-2010-N__	1/4-20	0.250	5/8
P-2012-N__	1/4-20	0.250	3/4
P-2014-N__	1/4-20	0.250	7/8
P-2016-N__	1/4-20	0.250	1
P-2018-N__	1/4-20	0.250	1 1/8
P-2020-N__	1/4-20	0.250	1 1/4
P-2024-N__	1/4-20	0.250	1 1/2



For detailed prints, tolerances, and variations
please email sales@ucomponents.com

Non-Vented Screw, Pan Head, Slotted Drive

ASME B18.6.3 / 18-8 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned
(No-suffix)

Silver plated
-A

Gold plated
-AU

Nickel plated
-K


MoS2 coated
-C

WS2 coated
-W

Electro Polished
-EP

Part Number	Size	Dia	Length
PS-202-N__	#2-56	0.086	1/8
PS-203-N__	#2-56	0.086	3/16
PS-204-N__	#2-56	0.086	1/4
PS-205-N__	#2-56	0.086	5/16
PS-206-N__	#2-56	0.086	3/8
PS-207-N__	#2-56	0.086	7/16
PS-208-N__	#2-56	0.086	1/2
PS-210-N__	#2-56	0.086	5/8
PS-212-N__	#2-56	0.086	3/4
PS-402-N__	#4-40	0.112	1/8
PS-403-N__	#4-40	0.112	3/16
PS-404-N__	#4-40	0.112	1/4
PS-405-N__	#4-40	0.112	5/16
PS-406-N__	#4-40	0.112	3/8
PS-407-N__	#4-40	0.112	7/16
PS-408-N__	#4-40	0.112	1/2
PS-410-N__	#4-40	0.112	5/8
PS-412-N__	#4-40	0.112	3/4
PS-602-N__	#6-32	0.138	1/8
PS-603-N__	#6-32	0.138	3/16
PS-604-N__	#6-32	0.138	1/4
PS-605-N__	#6-32	0.138	5/16
PS-606-N__	#6-32	0.138	3/8
PS-607-N__	#6-32	0.138	7/16
PS-608-N__	#6-32	0.138	1/2
PS-610-N__	#6-32	0.138	5/8
PS-612-N__	#6-32	0.138	3/4
PS-614-N__	#6-32	0.138	7/8
PS-616-N__	#6-32	0.138	1
PS-803-N__	#8-32	0.164	3/16
PS-804-N__	#8-32	0.164	1/4
PS-805-N__	#8-32	0.164	5/16
PS-806-N__	#8-32	0.164	3/8
PS-807-N__	#8-32	0.164	7/16
PS-808-N__	#8-32	0.164	1/2
PS-810-N__	#8-32	0.164	5/8
PS-812-N__	#8-32	0.164	3/4
PS-814-N__	#8-32	0.164	7/8
PS-816-N__	#8-32	0.164	1
PS-818-N__	#8-32	0.164	1 1/8
PS-820-N__	#8-32	0.164	1 1/4
PS-1004-N__	#10-32	0.190	1/4

Part Number	Size	Dia	Length
PS-1005-N__	#10-32	0.190	5/16
PS-1006-N__	#10-32	0.190	3/8
PS-1007-N__	#10-32	0.190	7/16
PS-1008-N__	#10-32	0.190	1/2
PS-1010-N__	#10-32	0.190	5/8
PS-1012-N__	#10-32	0.190	3/4
PS-1014-N__	#10-32	0.190	7/8
PS-1016-N__	#10-32	0.190	1
PS-1018-N__	#10-32	0.190	1 1/8
PS-1020-N__	#10-32	0.190	1 1/4
PS-1022-N__	#10-32	0.190	1 3/8
PS-1024-N__	#10-32	0.190	1 1/2
PS-2004-N__	1/4-20	0.250	1/4
PS-2006-N__	1/4-20	0.250	3/8
PS-2008-N__	1/4-20	0.250	1/2
PS-2010-N__	1/4-20	0.250	5/8
PS-2012-N__	1/4-20	0.250	3/4
PS-2014-N__	1/4-20	0.250	7/8
PS-2016-N__	1/4-20	0.250	1
PS-2018-N__	1/4-20	0.250	1 1/8
PS-2020-N__	1/4-20	0.250	1 1/4
PS-2024-N__	1/4-20	0.250	1 1/2



For detailed prints, tolerances, and variations
please email sales@uccomponents.com

Non-Vented Screw, Flange, Twelve Point Head

18-8 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
TWP-2808-N__	1/4-28	0.250	1/2
TWP-2814-N__	1/4-28	0.250	7/8
TWP-2816-N__	1/4-28	0.250	1
TWP-2820-N__	1/4-28	0.250	1 1/4
TWP-2824-N__	1/4-28	0.250	1 1/2
TWP-2828-N__	1/4-28	0.250	1 3/4
TWP-3112-N__	5/16-24	0.313	3/4
TWP-3116-N__	5/16-24	0.313	1
TWP-3120-N__	5/16-24	0.313	1 1/4
TWP-3124-N__	5/16-24	0.313	1 1/2
TWP-3128-N__	5/16-24	0.313	1 3/4
TWP-3132-N__	5/16-24	0.313	2
TWP-3136-N__	5/16-24	0.313	2 1/4
TWP-3140-N__	5/16-24	0.313	2 1/2
TWP-3144-N__	5/16-24	0.313	2 3/4



For detailed prints, tolerances, and variations
please email sales@ucomponents.com



NON-VENTED NUTS



18700 Adams Ct. Morgan Hill, CA 95037
Phone: 408.782.1929 | Fax: 408.782.7995
Email: sales@ucccomponents.com
www.ucccomponents.com

INCH

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Width Flats (min)	Width Corners (min)	Thick. (min)
N-256-__	#2-56	0.180	0.205	0.057
N-440-__	#4-40	0.241	0.275	0.087
N-540-__	#5-40	0.302	0.344	0.102
N-632-__	#6-32	0.302	0.344	0.102
N-832-__	#8-32	0.332	0.378	0.117
N-1024-__	#10-24	0.362	0.413	0.117
N-1032-__	#10-32	0.362	0.413	0.117
N-2520-__	1/4-20	0.423	0.482	0.178
N-2528-__	1/4-28	0.423	0.482	0.178
N-3118-__	5/16-18	0.545	0.621	0.208
N-3124-__	5/16-24	0.545	0.621	0.208
N-3816-__	3/8-16	0.607	0.692	0.239
N-3824-__	3/8-24	0.607	0.692	0.239
N-5013-__	1/2-13	0.85	0.969	0.277

HEX NUTS
INCH STANDARD - ASME B18.2.2



For detailed prints, tolerances, and variations
please email sales@ucomponents.com

NON-VENTED WASHERS




18700 Adams Ct. Morgan Hill, CA 95037
Phone: 408.782.1929 | Fax: 408.782.7995
Email: sales@ucccomponents.com
www.ucccomponents.com

INCH

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	ID	OD	Thickness
WF-02-__	#2	0.089	0.149	0.016
WF-04-__	#4	0.115	0.209	0.016
WF-05-__	#5	0.128	0.238	0.016
WF-06-__	#6	0.143	0.267	0.016
WF-08-__	#8	0.169	0.304	0.032
WF-10-__	#10	0.195	0.354	0.032
WF-25-__	1/4	0.255	0.468	0.032
WF-31-__	5/16	0.328	0.562	0.032
WF-38-__	3/8	0.39	0.625	0.032
WF-50-__	1/2	0.515	0.875	0.032


FLAT WASHER


For detailed prints, tolerances, and variations
please email sales@ucomponents.com


Washer, Split Lock

Stainless Steel

For selected Part Number, add Finish Suffix


Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	ID (Max)	OD (Max)	Thickness (Max)
WL-02-__	#2	0.094	0.172	0.026
WL-04-__	#4	0.121	0.209	0.031
WL-06-__	#6	0.148	0.25	0.037
WL-08-__	#8	0.175	0.293	0.046
WL-10-__	#10	0.202	0.334	0.053
WL-25-__	1/4	0.263	0.489	0.072
WL-31-__	5/16	0.328	0.586	0.088
WL-38-__	3/8	0.393	0.683	0.104
WL-50-__	1/2	0.523	0.873	0.135



For detailed prints, tolerances, and variations
please email sales@ucomponents.com

VENTED WASHERS

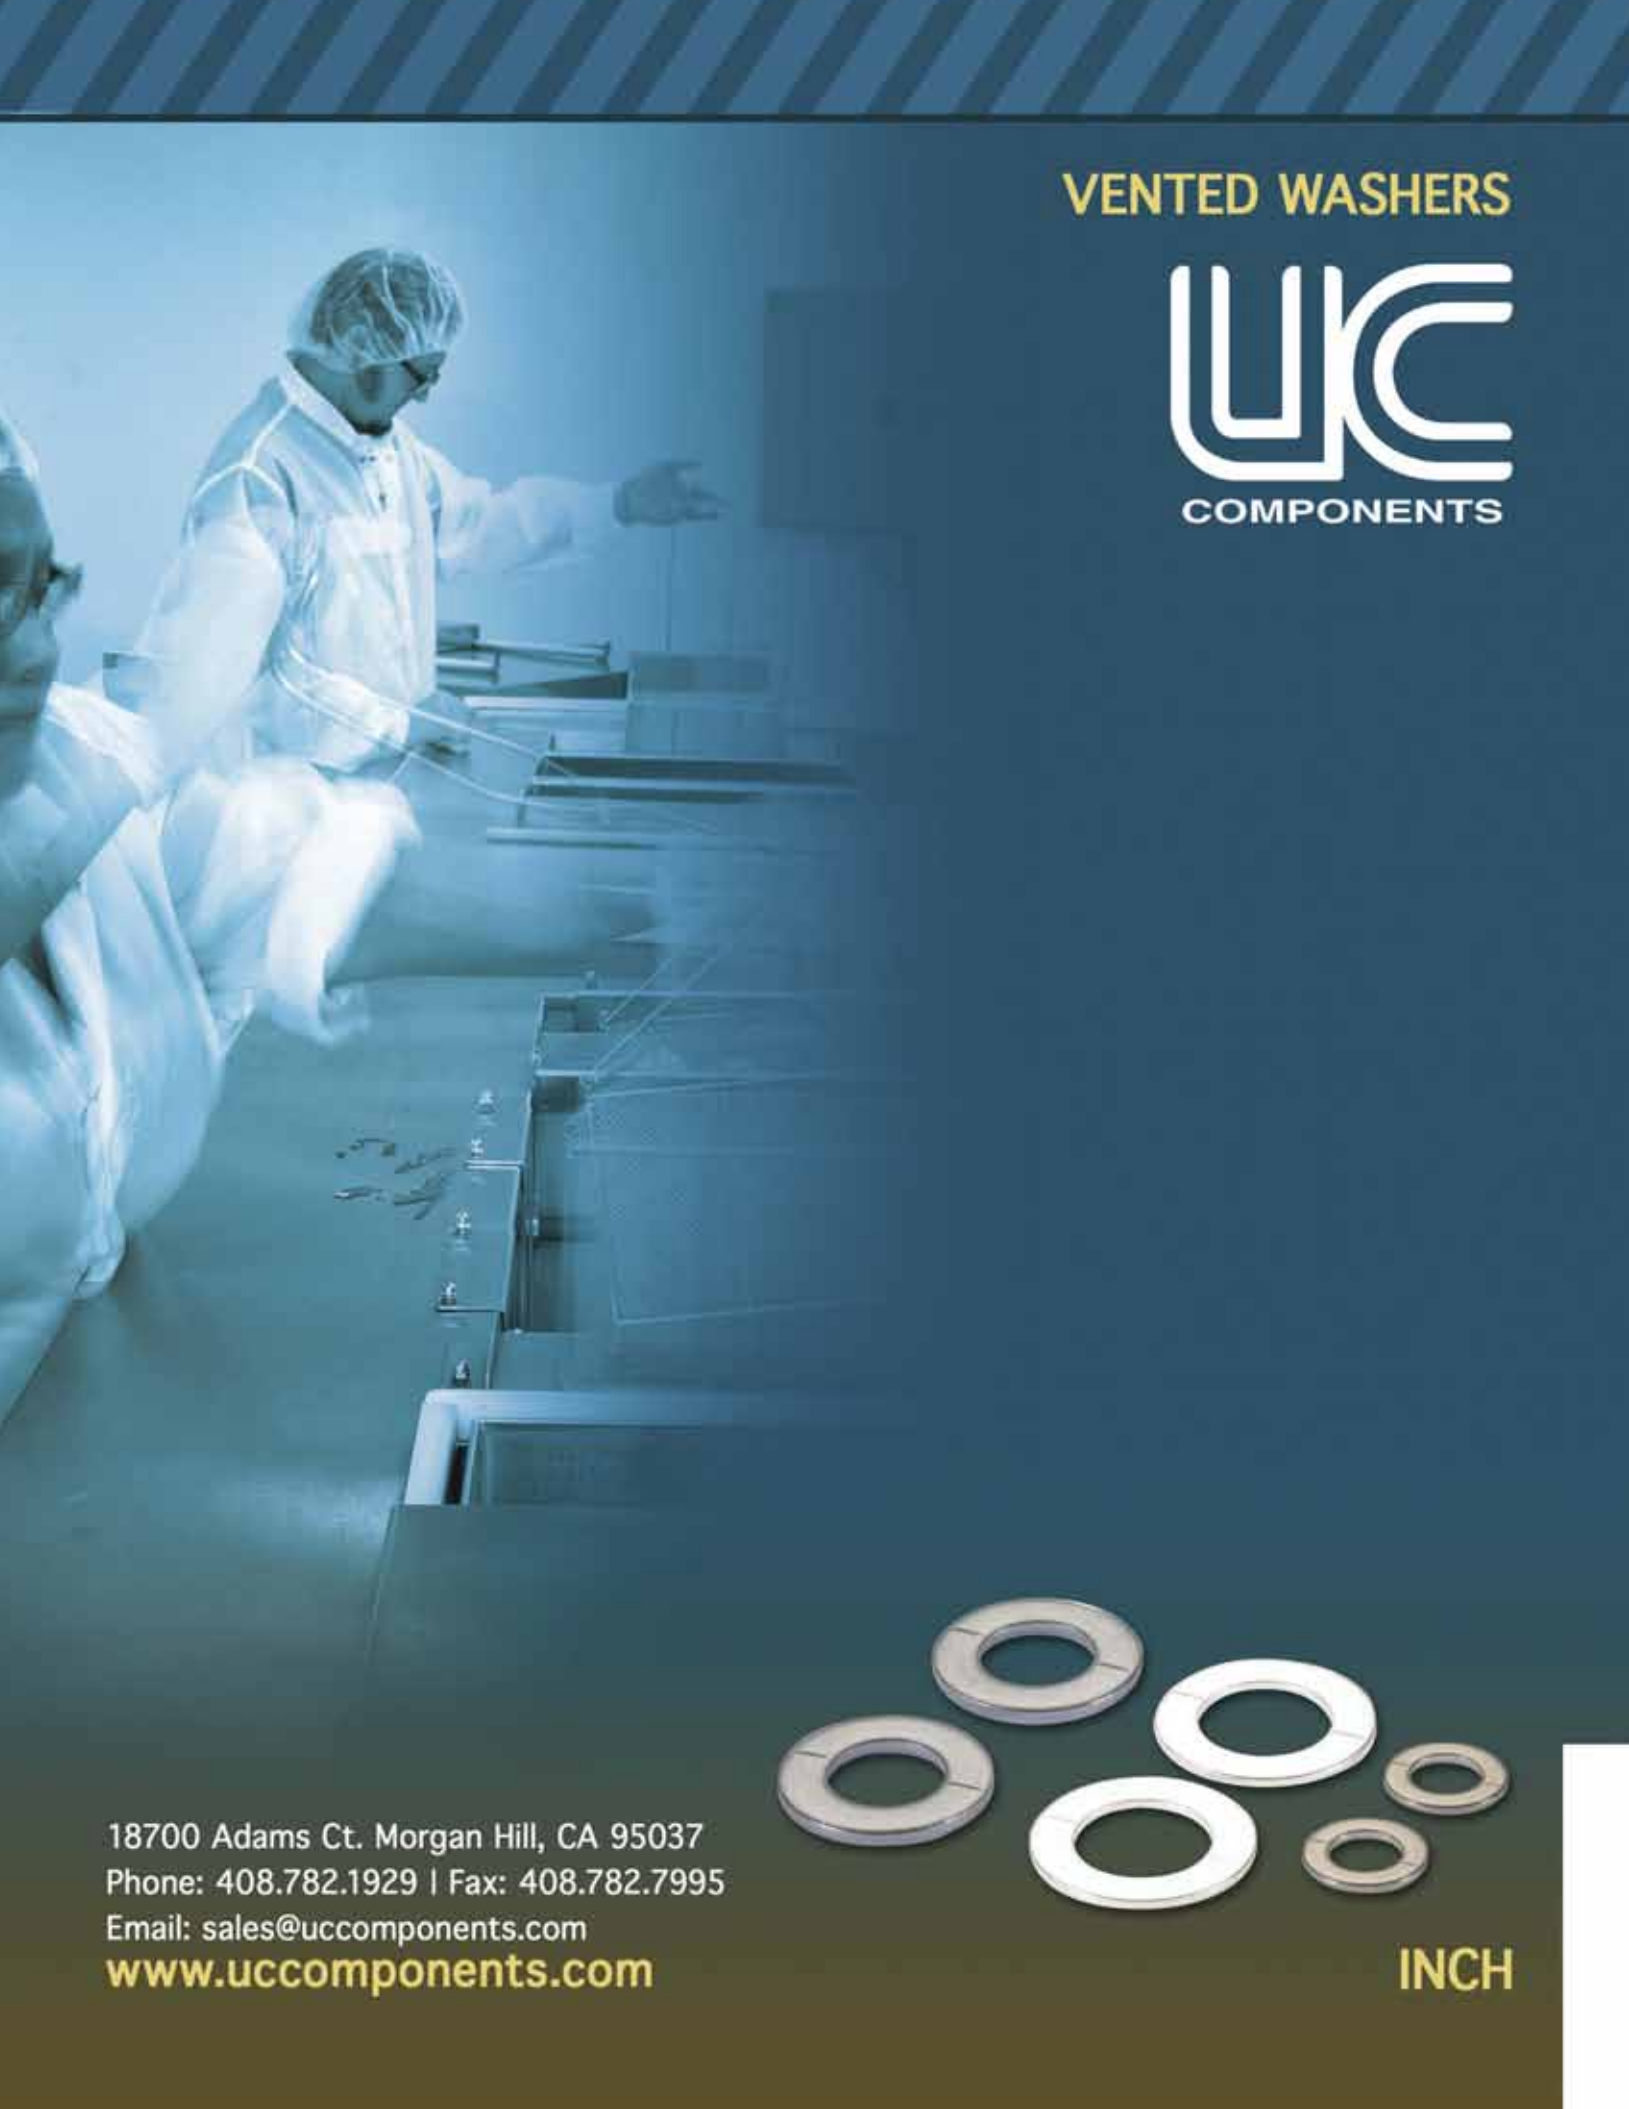

18700 Adams Ct. Morgan Hill, CA 95037
Phone: 408.782.1929 | Fax: 408.782.7995
Email: sales@ucccomponents.com
www.ucccomponents.com

INCH

Vented Washer, Flat Stainless Steel


For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	ID	OD	Thickness
WFV-02-__	#2	0.089	0.149	0.016
WFV-04-__	#4	0.115	0.209	0.016
WFV-05-__	#5	0.128	0.238	0.016
WFV-06-__	#6	0.143	0.267	0.016
WFV-08-__	#8	0.169	0.304	0.032
WFV-10-__	#10	0.195	0.354	0.032
WFV-25-__	1/4	0.255	0.468	0.032
WFV-31-__	5/16	0.328	0.562	0.032
WFV-38-__	3/8	0.39	0.625	0.032
WFV-50-__	1/2	0.515	0.875	0.032



VENTED FLAT WASHER




For detailed prints, tolerances, and variations
please email sales@uccomponents.com


This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

NOMINAL SCREW HEAD DIMENSIONS FOR COMMON FASTENERS


SOCKET HEAD CAP




BUTTON HEAD, SOCKET




SOCKET SET, CUP PT




HEX HEAD




FLAT HEAD, SOCKET




FLAT HEAD, SLOTTED




FLAT HEAD, PHILLIPS




LOCK WASHER




CHEESE HEAD, SLOTTED




PAN HEAD, SLOTTED



PAN HEAD, PHILLIPS



FLAT WASHER



Contact UC Components for head types not represented here as well as specific tolerance and finish details.

METRIC SIZES - DIMENSIONS IN MILLIMETERS

SIZE /DIA	SOCKET HEAD		BUTTON HEAD SOCKET		HEX HEAD			FLAT HEAD SOCKET		FLAT HEAD PHILLIPS, SLOTTED		CHEESE HEAD SLOTTED		PAN HEAD SLOTTED		PAN HEAD PHILLIPS	
	D	H	D	H	C	F	H	D	H	D	H	D	H	D	H	D	H
M2	3.62	1.86	*	*	*	*	*	*	*	3.8	1.2	3.8	1.3	4	1.2	4	1.6
M2.5	4.32	2.36	*	*	*	*	*	*	*	4.7	1.5	4.5	1.6	5	1.5	5	2
M3	5.32	2.86	5.7	1.65	6.01	5.5	1.88	6	1.7	5.6	1.65	5.5	2	6	1.8	6	2.4
M4	6.78	3.82	7.6	2.2	7.66	7	2.68	8	2.3	7.5	2.2	7	2.6	8	2.4	8	3.1
M5	8.28	4.82	9.5	2.75	8.79	8	3.35	10	2.8	9.2	2.5	8.5	3.3	10	3	10	3.8
M6	9.78	5.7	10.5	3.3	11.05	10	3.85	12	3.3	11	3	10	3.9	12	3.6	12	4.6
M8	12.73	7.64	14	4.4	14.38	13	5.15	16	4.4	14.5	4	13	5	16	4.8	16	6
M10	15.73	9.64	17.5	5.5	18.9	17	6.22	20	5.5	18	5	16	6	20	6	*	*
M12	17.73	11.57	21	6.6	21.1	19	7.32	24	6.5	22	6	*	*	*	*	*	*

* Dimensions listed above are for reference only. Contact UC Components for dimensions and types not listed here as well as for specific tolerances and details.

METRIC-TO-INCH CONVERSION CHART

metric mm	approx. inches	metric mm	approx. inches	metric mm	approx. inches	metric mm	approx. inches	metric mm	approx. inches	metric mm	approx. inches	metric mm	approx. inches	metric mm	approx. inches
1	3/64	9	23/64	18	23/32	55	2 3/16	110	4 3/8	210	8 1/4	310	12 1/4	410	16 1/8
1.5	1/16	9.5	3/8	19	3/4	60	2 1/4	120	4 3/4	220	8 5/8	320	12 5/8	420	16 1/2
2	5/64	10	25/64	20	13/16	65	2 9/16	130	5 1/8	230	9	330	13	430	16 7/8
2.5	3/32	11	7/16	22	7/8	70	2 3/4	140	5 1/2	240	9 1/2	340	13 3/8	440	17 3/8
3	1/8	12	1/2	25	1	75	2 15/16	150	5 7/8	250	9 7/8	350	13 3/4	450	17 3/4
4	5/32	13	1/2	30	1 3/16	80	3 1/8	160	6 1/4	260	10 1/4	360	14 1/8	460	18 1/8
5	13/64	14	9/16	35	1 3/8	85	3 3/8	170	6 3/4	270	10 5/8	370	14 5/8	470	18 1/2
6.5	1/4	15	19/32	40	1 9/16	90	3 9/16	180	7 1/8	280	11	380	15	480	18 7/8
7	9/32	16	5/8	45	1 3/4	95	3 3/4	190	7 1/2	290	11 3/8	390	15 3/8	490	19 1/4
8	5/16	17	21/32	50	1 15/16	100	3 15/16	200	7 7/8	300	11 3/4	400	15 3/4	500	19 5/8



Items in This Catalog

This catalog contains the standard fastener product range offered by UC Components. UC Components carries many additional lengths and diameters as well as other materials. New products are added to our portfolio daily based on the demands of our customer base. Please contact sales@uccomponents.com if you do not see the item you are looking for.

Special and Custom Items

UC Components carries a wide variety of specialty items including but not limited to the following. Contact UC by phone, fax, or email if you don't see what you need:

Vented and Non-Vented Dowel Pins

Captivated Fasteners

Wire Hole Drilling

Custom Vented and Turned Fasteners to Print

RediVac™ Cleaned and Vacuum-Baked Fluoroelastomer O-Rings

Contact sales@uccomponents.com to request your separate o-ring catalog for reduced outgassing and resulting faster pump-down times in your vacuum system!

Special Materials and Finishes

In addition to 18-8 / A2-70 Stainless Steel, UC Components works most extensively with 316 and A4-70 Stainless Steels, which are available in virtually every size in this catalog. In addition, UC works with the following materials and finishes on a case-by-case basis:

Titanium (Grade 2, 5)

Inconel®

Aluminum (2024, 6061)

Hastelloy®

Nickel 200

Brass

Nitronic 60®

Nylon

PTFE

Alloy Steel

Nickel-Teflon Coating

Kolsterising®

Nylok® Blue® Nylon Torq-Patch®, Pellet®, or Strip®

Nytemp® Patch

Cleaning and Packaging

UC Components RediVac™ Products all go through a multi-stage, heated, de-ionized aqueous cleaning process prior to final packaging. Standard packaging consists of a single Class-100 bag, nitrogen purged and vacuum sealed to minimize particulate generation during transit. All cleaning and packaging performed within UC Components Certified Class-100 Cleanroom. Double-bagging, custom labeling, bar-coding, and kitting are available.



ENGINEERING, DESIGN AND USAGE PRECAUTIONS RELATING TO HIGH VACUUM FASTENERS

The operation of high vacuum manufacturing equipment presents a number of detailed and complicated engineering challenges. This section is designed to highlight some of those challenges as they relate to UC Components' products.

WHY A VENTED SCREW?

UC Components RediVac™ Vented Screws provide a path for trapped air to escape and be pumped away from the bottom and sides of a blind-tapped hole. This allows for faster and more thorough pump-down of a vacuum system and the elimination of "virtual leaks". This trapped air also represents potential contamination to a system under vacuum. Faster pump-down and the elimination of contamination result in higher throughput and improved yield.

PRECISION CLEANED FASTENERS AND GALLING

All of UC Components catalog parts are shipped Precision Cleaned and Class 100 Packaged, ready for vacuum service for most applications. However, Precision Cleaned parts can present a galling problem making removal of the fastener extremely difficult and causing unnecessary downtime. To reduce the threat of galling UC Components offers a number of solutions that are vacuum stable including WS2 and MoS2 Coatings as well as Ag and Au Platings.

LUBRICATION AND TORQUE VALUES

Torque value is primarily dependent on friction produced by both the threads and the material contact with the fastener head. The addition of lubrication, coating or plating will reduce the coefficient of friction resulting in a higher tension or clamping force for a given torque. The word of caution is that the tensile strength of a fastener can be exceeded without exceeding its' maximum recommended torque.

USING A SCREW TWICE

When tightening down a screw, small stress fractures occur. Removal of the fastener causes additional stress. With repeated use a fastener will eventually fail. In addition, many vacuum processes leave behind material which adheres to the fastener, can build up and flake off presenting potential particulate contamination and subsequently reduced yield. The savings experienced from screw re-use are often not worth the ramifications of screw failure.

For additional questions and technical assistance, please email sales@uccomponents.com or phone 408-782-1929.



TERMS AND CONDITIONS

Standard domestic order payment terms are 3% 10 net 30 days.

MINIMUM ORDER

Minimum order size is \$20 and \$5 per line item. There is also a 10 piece per line item minimum.

EXPORT ORDERS

Minimum order size for export is \$50.

Export orders paid by wire transfer are subject to a \$25 wire fee billed as a line item.
Export orders exceeding \$500 will have the wire fee waived.

Unless otherwise specified, freight charges are pre-paid and added to invoice. Duties and taxes are billed collect to the recipient.

UC COMPONENTS ACCEPTS VISA, MASTERCARD, AND AMERICAN EXPRESS

Prices are subject to change without notice.

Not responsible for typographical or printing errors.

SHIPMENTS

Domestic shipments are made via Federal Express or UPS unless otherwise specified at the time of order. Additional handling charges may apply to orders not shipped via Federal Express or UPS.

Shortages, returns, and customer claims must be made within 10 days of receipt. No returns will be accepted without prior authorization.






All terms and conditions are subject to change without notice.

For additional questions and technical assistance, please email sales@uccomponents.com or phone 408-782-1929.







TABLE OF CONTENTS

VENTED SCREWS




	Button Head, Socket Drive.....	M-2
	Socket Head Cap.....	M-3/M-4
	Flat Head, Phillips Drive	M-5
	Flat Head, Socket Drive	M-6
	Flat Head, Slotted Drive	M-7
	Hex Head	M-8
	Set, Cup Point, Socket Drive.....	M-9
	Cheese Head, Slotted Drive	M-10
	Pan Head, Phillips Drive.....	M-11
	Pan Head, Slotted Drive	M-12

SLOT-VENTED SCREWS

	Button Head, Socket Drive.....	M-14
	Socket Head Cap.....	M-15/M-16
	Flat Head, Phillips Drive	M-17
	Flat Head, Socket Drive	M-18
	Flat Head, Slotted Drive	M-19
	Hex Head	M-20
	Set, Cup Point, Socket Drive.....	M-21
	Cheese Head, Slotted Drive	M-22

	Pan Head, Phillips Drive.....	M-23
	Pan Head, Slotted Drive	M-24

NON VENTED SCREWS

	Button Head, Socket Drive.....	M-26
	Socket Head Cap.....	M-27/M-28
	Flat Head, Phillips Drive	M-29
	Flat Head, Socket Drive	M-30
	Flat Head, Slotted Drive	M-31
	Hex Head	M-32
	Set, Cup Point, Socket Drive.....	M-33
	Cheese Head, Slotted Drive	M-34
	Pan Head, Phillips Drive.....	M-35
	Pan Head, Slotted Drive	M-36
	Flange, Twelve Point Head	M-37

NUTS

	Nut, Hex.....	M-40
---	---------------	------

WASHERS

	Washer, Flat	M-42
	Washer, Split Lock.....	M-43
	Vented Washer, Flat	M-46



VENTED SCREWS



18700 Adams Ct. Morgan Hill, CA 95037
Phone: 408.782.1929 | Fax: 408.782.7995
Email: sales@uccomponents.com
www.uccomponents.com

METRIC


Vented Screw, Button Head, Socket Drive

ISO 7380 / A2 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
MBU-204-__	M2	2	4
MBU-205-__	M2	2	5
MBU-206-__	M2	2	6
MBU-208-__	M2	2	8
MBU-210-__	M2	2	10
MBU-2.504-__	M2.5	2.5	4
MBU-2.505-__	M2.5	2.5	5
MBU-2.506-__	M2.5	2.5	6
MBU-2.508-__	M2.5	2.5	8
MBU-2.510-__	M2.5	2.5	10
MBU-305-__	M3	3	5
MBU-306-__	M3	3	6
MBU-308-__	M3	3	8
MBU-310-__	M3	3	10
MBU-312-__	M3	3	12
MBU-316-__	M3	3	16
MBU-406-__	M4	4	6
MBU-408-__	M4	4	8
MBU-410-__	M4	4	10
MBU-412-__	M4	4	12
MBU-416-__	M4	4	16
MBU-420-__	M4	4	20
MBU-425-__	M4	4	25
MBU-508-__	M5	5	8
MBU-510-__	M5	5	10
MBU-512-__	M5	5	12
MBU-516-__	M5	5	16
MBU-520-__	M5	5	20
MBU-525-__	M5	5	25
MBU-530-__	M5	5	30
MBU-610-__	M6	6	10
MBU-612-__	M6	6	12
MBU-616-__	M6	6	16
MBU-620-__	M6	6	20
MBU-625-__	M6	6	25



For detailed prints, tolerances, and variations
please email sales@ucomponents.com

Vented Screw, Socket Head Cap


DIN 912 / ISO 4762 / A2 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
MC-204-__	M2	2	4
MC-205-__	M2	2	5
MC-206-__	M2	2	6
MC-208-__	M2	2	8
MC-210-__	M2	2	10
MC-212-__	M2	2	12
MC-216-__	M2	2	16
MC-2.504-__	M2.5	2.5	4
MC-2.505-__	M2.5	2.5	5
MC-2.506-__	M2.5	2.5	6
MC-2.508-__	M2.5	2.5	8
MC-2.510-__	M2.5	2.5	10
MC-2.512-__	M2.5	2.5	12
MC-2.516-__	M2.5	2.5	16
MC-2.520-__	M2.5	2.5	20
MC-304-__	M3	3	4
MC-305-__	M3	3	5
MC-306-__	M3	3	6
MC-308-__	M3	3	8
MC-310-__	M3	3	10
MC-312-__	M3	3	12
MC-316-__	M3	3	16
MC-320-__	M3	3	20
MC-325-__	M3	3	25
MC-330-__	M3	3	30
MC-404-__	M4	4	4
MC-405-__	M4	4	5
MC-406-__	M4	4	6
MC-408-__	M4	4	8
MC-410-__	M4	4	10
MC-412-__	M4	4	12
MC-414-__	M4	4	14
MC-416-__	M4	4	16
MC-420-__	M4	4	20
MC-425-__	M4	4	25
MC-430-__	M4	4	30
MC-435-__	M4	4	35
MC-440-__	M4	4	40
MC-445-__	M4	4	45
MC-506-__	M5	5	6
MC-508-__	M5	5	8
MC-510-__	M5	5	10

Part Number	Size	Dia	Length
MC-512-__	M5	5	12
MC-516-__	M5	5	16
MC-520-__	M5	5	20
MC-525-__	M5	5	25
MC-530-__	M5	5	30
MC-535-__	M5	5	35
MC-540-__	M5	5	40
MC-545-__	M5	5	45



For detailed prints, tolerances, and variations
please email sales@ucomponents.com

Vented Screw, Socket Head Cap


DIN 912 / ISO 4762 / A2 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
MC-550-__	M5	5	50
MC-608-__	M6	6	8
MC-610-__	M6	6	10
MC-612-__	M6	6	12
MC-616-__	M6	6	16
MC-620-__	M6	6	20
MC-625-__	M6	6	25
MC-630-__	M6	6	30
MC-635-__	M6	6	35
MC-640-__	M6	6	40
MC-645-__	M6	6	45
MC-650-__	M6	6	50
MC-810-__	M8	8	10
MC-812-__	M8	8	12
MC-816-__	M8	8	16
MC-820-__	M8	8	20
MC-825-__	M8	8	25
MC-830-__	M8	8	30
MC-835-__	M8	8	35
MC-840-__	M8	8	40
MC-845-__	M8	8	45
MC-850-__	M8	8	50
MC-860-__	M8	8	60
MC-1016-__	M10	10	16
MC-1020-__	M10	10	20
MC-1025-__	M10	10	25
MC-1030-__	M10	10	30
MC-1035-__	M10	10	35
MC-1040-__	M10	10	40
MC-1045-__	M10	10	45
MC-1050-__	M10	10	50
MC-1060-__	M10	10	60
MC-1220-__	M12	12	20
MC-1225-__	M12	12	25
MC-1230-__	M12	12	30
MC-1235-__	M12	12	35
MC-1240-__	M12	12	40
MC-1245-__	M12	12	45
MC-1250-__	M12	12	50
MC-1260-__	M12	12	60
MC-1625-__	M16	16	25
MC-1630-__	M16	16	30

Part Number	Size	Dia	Length
MC-1635-__	M16	16	35
MC-1640-__	M16	16	40
MC-1645-__	M16	16	45
MC-1650-__	M16	16	50
MC-1660-__	M16	16	60



For detailed prints, tolerances, and variations
please email sales@ucomponents.com


Vented Screw, Flat Head, Phillips Drive

DIN 965A / ISO 7046 / A2 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
MF-204-__	M2	2	4
MF-205-__	M2	2	5
MF-206-__	M2	2	6
MF-208-__	M2	2	8
MF-210-__	M2	2	10
MF-2.504-__	M2.5	2.5	4
MF-2.505-__	M2.5	2.5	5
MF-2.506-__	M2.5	2.5	6
MF-2.508-__	M2.5	2.5	8
MF-2.510-__	M2.5	2.5	10
MF-305-__	M3	3	5
MF-306-__	M3	3	6
MF-308-__	M3	3	8
MF-310-__	M3	3	10
MF-312-__	M3	3	12
MF-316-__	M3	3	16
MF-406-__	M4	4	6
MF-408-__	M4	4	8
MF-410-__	M4	4	10
MF-412-__	M4	4	12
MF-416-__	M4	4	16
MF-420-__	M4	4	20
MF-425-__	M4	4	25
MF-508-__	M5	5	8
MF-510-__	M5	5	10
MF-512-__	M5	5	12
MF-516-__	M5	5	16
MF-520-__	M5	5	20
MF-525-__	M5	5	25
MF-530-__	M5	5	30
MF-610-__	M6	6	10
MF-612-__	M6	6	12
MF-616-__	M6	6	16
MF-620-__	M6	6	20
MF-625-__	M6	6	25

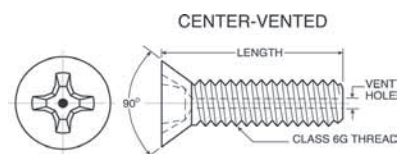

For detailed prints, tolerances, and variations
please email sales@uccomponents.com


Vented Screw, Flat Head, Socket Drive

DIN 7991 / A2 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
MFA-204-__	M2	2	4
MFA-205-__	M2	2	5
MFA-206-__	M2	2	6
MFA-208-__	M2	2	8
MFA-210-__	M2	2	10
MFA-2.504-__	M2.5	2.5	4
MFA-2.505-__	M2.5	2.5	5
MFA-2.506-__	M2.5	2.5	6
MFA-2.508-__	M2.5	2.5	8
MFA-2.510-__	M2.5	2.5	10
MFA-305-__	M3	3	5
MFA-306-__	M3	3	6
MFA-308-__	M3	3	8
MFA-310-__	M3	3	10
MFA-312-__	M3	3	12
MFA-316-__	M3	3	16
MFA-406-__	M4	4	6
MFA-408-__	M4	4	8
MFA-410-__	M4	4	10
MFA-412-__	M4	4	12
MFA-416-__	M4	4	16
MFA-420-__	M4	4	20
MFA-425-__	M4	4	25
MFA-508-__	M5	5	8
MFA-510-__	M5	5	10
MFA-512-__	M5	5	12
MFA-516-__	M5	5	16
MFA-520-__	M5	5	20
MFA-525-__	M5	5	25
MFA-530-__	M5	5	30
MFA-610-__	M6	6	10
MFA-612-__	M6	6	12
MFA-616-__	M6	6	16
MFA-620-__	M6	6	20
MFA-625-__	M6	6	25

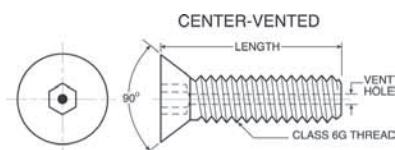

For detailed prints, tolerances, and variations
please email sales@ucomponents.com


Vented Screw, Flat Head, Slotted Drive

DIN 963A / ISO 2009 / A2 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
MFS-204-__	M2	2	4
MFS-205-__	M2	2	5
MFS-206-__	M2	2	6
MFS-208-__	M2	2	8
MFS-210-__	M2	2	10
MFS-2.504-__	M2.5	2.5	4
MFS-2.505-__	M2.5	2.5	5
MFS-2.506-__	M2.5	2.5	6
MFS-2.508-__	M2.5	2.5	8
MFS-2.510-__	M2.5	2.5	10
MFS-305-__	M3	3	5
MFS-306-__	M3	3	6
MFS-308-__	M3	3	8
MFS-310-__	M3	3	10
MFS-312-__	M3	3	12
MFS-316-__	M3	3	16
MFS-406-__	M4	4	6
MFS-408-__	M4	4	8
MFS-410-__	M4	4	10
MFS-412-__	M4	4	12
MFS-416-__	M4	4	16
MFS-420-__	M4	4	20
MFS-425-__	M4	4	25
MFS-508-__	M5	5	8
MFS-510-__	M5	5	10
MFS-512-__	M5	5	12
MFS-516-__	M5	5	16
MFS-520-__	M5	5	20
MFS-525-__	M5	5	25
MFS-530-__	M5	5	30
MFS-610-__	M6	6	10
MFS-612-__	M6	6	12
MFS-616-__	M6	6	16
MFS-620-__	M6	6	20
MFS-625-__	M6	6	25



For detailed prints, tolerances, and variations
please email sales@ucomponents.com


Vented Screw, Hex Head

DIN 933 / ISO 4017 / A2 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
MH-305-__	M3	3	5
MH-306-__	M3	3	6
MH-308-__	M3	3	8
MH-310-__	M3	3	10
MH-312-__	M3	3	12
MH-316-__	M3	3	16
MH-406-__	M4	4	6
MH-408-__	M4	4	8
MH-410-__	M4	4	10
MH-412-__	M4	4	12
MH-416-__	M4	4	16
MH-420-__	M4	4	20
MH-425-__	M4	4	25
MH-430-__	M4	4	30
MH-435-__	M4	4	35
MH-508-__	M5	5	8
MH-510-__	M5	5	10
MH-512-__	M5	5	12
MH-516-__	M5	5	16
MH-520-__	M5	5	20
MH-525-__	M5	5	25
MH-530-__	M5	5	30
MH-535-__	M5	5	35
MH-606-__	M6	6	6
MH-608-__	M6	6	8
MH-610-__	M6	6	10
MH-612-__	M6	6	12
MH-616-__	M6	6	16
MH-620-__	M6	6	20
MH-625-__	M6	6	25
MH-630-__	M6	6	30
MH-635-__	M6	6	35
MH-810-__	M8	8	10
MH-812-__	M8	8	12
MH-816-__	M8	8	16
MH-820-__	M8	8	20
MH-825-__	M8	8	25
MH-830-__	M8	8	30
MH-835-__	M8	8	35
MH-840-__	M8	8	40



For detailed prints, tolerances, and variations
please email sales@ucomponents.com


Vented Screw, Set, Cup Point, Socket Drive

DIN 916 / ISO 4029 / A2 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
MT-204-__	M2	2	4
MT-205-__	M2	2	5
MT-206-__	M2	2	6
MT-208-__	M2	2	8
MT-210-__	M2	2	10
MT-2.504-__	M2.5	2.5	4
MT-2.505-__	M2.5	2.5	5
MT-2.506-__	M2.5	2.5	6
MT-2.508-__	M2.5	2.5	8
MT-2.510-__	M2.5	2.5	10
MT-305-__	M3	3	5
MT-306-__	M3	3	6
MT-308-__	M3	3	8
MT-310-__	M3	3	10
MT-312-__	M3	3	12
MT-316-__	M3	3	16
MT-406-__	M4	4	6
MT-408-__	M4	4	8
MT-410-__	M4	4	10
MT-412-__	M4	4	12
MT-416-__	M4	4	16
MT-420-__	M4	4	20
MT-425-__	M4	4	25
MT-508-__	M5	5	8
MT-510-__	M5	5	10
MT-512-__	M5	5	12
MT-516-__	M5	5	16
MT-520-__	M5	5	20
MT-525-__	M5	5	25
MT-530-__	M5	5	30
MT-610-__	M6	6	10
MT-612-__	M6	6	12
MT-616-__	M6	6	16
MT-620-__	M6	6	20
MT-625-__	M6	6	25

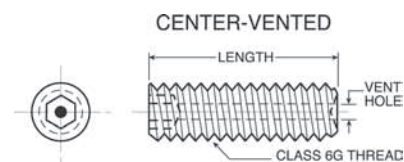

For detailed prints, tolerances, and variations
please email sales@ucomponents.com


Vented Screw, Cheese Head, Slotted Drive

DIN 84A / ISO 1207 / A2 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
MES-204-__	M2	2	4
MES-205-__	M2	2	5
MES-206-__	M2	2	6
MES-208-__	M2	2	8
MES-210-__	M2	2	10
MES-2.504-__	M2.5	2.5	4
MES-2.505-__	M2.5	2.5	5
MES-2.506-__	M2.5	2.5	6
MES-2.508-__	M2.5	2.5	8
MES-2.510-__	M2.5	2.5	10
MES-305-__	M3	3	5
MES-306-__	M3	3	6
MES-308-__	M3	3	8
MES-310-__	M3	3	10
MES-312-__	M3	3	12
MES-316-__	M3	3	16
MES-406-__	M4	4	6
MES-408-__	M4	4	8
MES-410-__	M4	4	10
MES-412-__	M4	4	12
MES-416-__	M4	4	16
MES-420-__	M4	4	20
MES-425-__	M4	4	25
MES-508-__	M5	5	8
MES-510-__	M5	5	10
MES-512-__	M5	5	12
MES-516-__	M5	5	16
MES-520-__	M5	5	20
MES-525-__	M5	5	25
MES-530-__	M5	5	30
MES-610-__	M6	6	10
MES-612-__	M6	6	12
MES-616-__	M6	6	16
MES-620-__	M6	6	20
MES-625-__	M6	6	25



For detailed prints, tolerances, and variations
please email sales@ucomponents.com


Vented Screw, Pan Head, Phillips Drive

DIN 7985A / ISO 7045 / A2 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
MP-204-__	M2	2	4
MP-205-__	M2	2	5
MP-206-__	M2	2	6
MP-208-__	M2	2	8
MP-210-__	M2	2	10
MP-2.504-__	M2.5	2.5	4
MP-2.505-__	M2.5	2.5	5
MP-2.506-__	M2.5	2.5	6
MP-2.508-__	M2.5	2.5	8
MP-2.510-__	M2.5	2.5	10
MP-305-__	M3	3	5
MP-306-__	M3	3	6
MP-308-__	M3	3	8
MP-310-__	M3	3	10
MP-312-__	M3	3	12
MP-316-__	M3	3	16
MP-406-__	M4	4	6
MP-408-__	M4	4	8
MP-410-__	M4	4	10
MP-412-__	M4	4	12
MP-416-__	M4	4	16
MP-420-__	M4	4	20
MP-425-__	M4	4	25
MP-508-__	M5	5	8
MP-510-__	M5	5	10
MP-512-__	M5	5	12
MP-516-__	M5	5	16
MP-520-__	M5	5	20
MP-525-__	M5	5	25
MP-530-__	M5	5	30
MP-610-__	M6	6	10
MP-612-__	M6	6	12
MP-616-__	M6	6	16
MP-620-__	M6	6	20
MP-625-__	M6	6	25



For detailed prints, tolerances, and variations
please email sales@uccomponents.com


Vented Screw, Pan Head, Slotted Drive

DIN 85A / ISO 1580 / A2 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
MPS-204-__	M2	2	4
MPS-205-__	M2	2	5
MPS-206-__	M2	2	6
MPS-208-__	M2	2	8
MPS-210-__	M2	2	10
MPS-2.504-__	M2.5	2.5	4
MPS-2.505-__	M2.5	2.5	5
MPS-2.506-__	M2.5	2.5	6
MPS-2.508-__	M2.5	2.5	8
MPS-2.510-__	M2.5	2.5	10
MPS-305-__	M3	3	5
MPS-306-__	M3	3	6
MPS-308-__	M3	3	8
MPS-310-__	M3	3	10
MPS-312-__	M3	3	12
MPS-316-__	M3	3	16
MPS-406-__	M4	4	6
MPS-408-__	M4	4	8
MPS-410-__	M4	4	10
MPS-412-__	M4	4	12
MPS-416-__	M4	4	16
MPS-420-__	M4	4	20
MPS-425-__	M4	4	25
MPS-508-__	M5	5	8
MPS-510-__	M5	5	10
MPS-512-__	M5	5	12
MPS-516-__	M5	5	16
MPS-520-__	M5	5	20
MPS-525-__	M5	5	25
MPS-530-__	M5	5	30
MPS-610-__	M6	6	10
MPS-612-__	M6	6	12
MPS-616-__	M6	6	16
MPS-620-__	M6	6	20
MPS-625-__	M6	6	25



For detailed prints, tolerances, and variations
please email sales@ucomponents.com

SLOT-VENTED SCREWS



18700 Adams Ct. Morgan Hill, CA 95037
Phone: 408.782.1929 | Fax: 408.782.7995
Email: sales@ucccomponents.com
www.ucccomponents.com

METRIC


Slot-Vented Screw, Button Head, Socket Drive

ISO 7380 / A2 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
MBU-204-SV__	M2	2	4
MBU-205-SV__	M2	2	5
MBU-206-SV__	M2	2	6
MBU-208-SV__	M2	2	8
MBU-210-SV__	M2	2	10
MBU-2.504-SV__	M2.5	2.5	4
MBU-2.505-SV__	M2.5	2.5	5
MBU-2.506-SV__	M2.5	2.5	6
MBU-2.508-SV__	M2.5	2.5	8
MBU-2.510-SV__	M2.5	2.5	10
MBU-305-SV__	M3	3	5
MBU-306-SV__	M3	3	6
MBU-308-SV__	M3	3	8
MBU-310-SV__	M3	3	10
MBU-312-SV__	M3	3	12
MBU-316-SV__	M3	3	16
MBU-406-SV__	M4	4	6
MBU-408-SV__	M4	4	8
MBU-410-SV__	M4	4	10
MBU-412-SV__	M4	4	12
MBU-416-SV__	M4	4	16
MBU-420-SV__	M4	4	20
MBU-425-SV__	M4	4	25
MBU-508-SV__	M5	5	8
MBU-510-SV__	M5	5	10
MBU-512-SV__	M5	5	12
MBU-516-SV__	M5	5	16
MBU-520-SV__	M5	5	20
MBU-525-SV__	M5	5	25
MBU-530-SV__	M5	5	30
MBU-610-SV__	M6	6	10
MBU-612-SV__	M6	6	12
MBU-616-SV__	M6	6	16
MBU-620-SV__	M6	6	20
MBU-625-SV__	M6	6	25



For detailed prints, tolerances, and variations
please email sales@ucomponents.com

Slot-Vented Screw, Socket Head Cap


DIN 912 / ISO 4762 / A2 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
MC-204-SV__	M2	2	4
MC-205-SV__	M2	2	5
MC-206-SV__	M2	2	6
MC-208-SV__	M2	2	8
MC-210-SV__	M2	2	10
MC-212-SV__	M2	2	12
MC-216-SV__	M2	2	16
MC-2.504-SV__	M2.5	2.5	4
MC-2.505-SV__	M2.5	2.5	5
MC-2.506-SV__	M2.5	2.5	6
MC-2.508-SV__	M2.5	2.5	8
MC-2.510-SV__	M2.5	2.5	10
MC-2.512-SV__	M2.5	2.5	12
MC-2.516-SV__	M2.5	2.5	16
MC-2.520-SV__	M2.5	2.5	20
MC-304-SV__	M3	3	4
MC-305-SV__	M3	3	5
MC-306-SV__	M3	3	6
MC-308-SV__	M3	3	8
MC-310-SV__	M3	3	10
MC-312-SV__	M3	3	12
MC-316-SV__	M3	3	16
MC-320-SV__	M3	3	20
MC-325-SV__	M3	3	25
MC-330-SV__	M3	3	30
MC-404-SV__	M4	4	4
MC-405-SV__	M4	4	5
MC-406-SV__	M4	4	6
MC-408-SV__	M4	4	8
MC-410-SV__	M4	4	10
MC-412-SV__	M4	4	12
MC-414-SV__	M4	4	14
MC-416-SV__	M4	4	16
MC-420-SV__	M4	4	20
MC-425-SV__	M4	4	25
MC-430-SV__	M4	4	30
MC-435-SV__	M4	4	35
MC-440-SV__	M4	4	40
MC-445-SV__	M4	4	45
MC-506-SV__	M5	5	6
MC-508-SV__	M5	5	8
MC-510-SV__	M5	5	10

Part Number	Size	Dia	Length
MC-512-SV__	M5	5	12
MC-516-SV__	M5	5	16
MC-520-SV__	M5	5	20
MC-525-SV__	M5	5	25
MC-530-SV__	M5	5	30
MC-535-SV__	M5	5	35
MC-540-SV__	M5	5	40
MC-545-SV__	M5	5	45



For detailed prints, tolerances, and variations
please email sales@uccomponents.com

Slot-Vented Screw, Socket Head Cap


DIN 912 / ISO 4762 / A2 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
MC-550-SV__	M5	5	50
MC-608-SV__	M6	6	8
MC-610-SV__	M6	6	10
MC-612-SV__	M6	6	12
MC-616-SV__	M6	6	16
MC-620-SV__	M6	6	20
MC-625-SV__	M6	6	25
MC-630-SV__	M6	6	30
MC-635-SV__	M6	6	35
MC-640-SV__	M6	6	40
MC-645-SV__	M6	6	45
MC-650-SV__	M6	6	50
MC-810-SV__	M8	8	10
MC-812-SV__	M8	8	12
MC-816-SV__	M8	8	16
MC-820-SV__	M8	8	20
MC-825-SV__	M8	8	25
MC-830-SV__	M8	8	30
MC-835-SV__	M8	8	35
MC-840-SV__	M8	8	40
MC-845-SV__	M8	8	45
MC-850-SV__	M8	8	50
MC-1016-SV__	M10	10	16
MC-1020-SV__	M10	10	20
MC-1025-SV__	M10	10	25
MC-1030-SV__	M10	10	30
MC-1035-SV__	M10	10	35
MC-1040-SV__	M10	10	40
MC-1045-SV__	M10	10	45
MC-1050-SV__	M10	10	50
MC-1060-SV__	M10	10	60
MC-1220-SV__	M12	12	20
MC-1225-SV__	M12	12	25
MC-1230-SV__	M12	12	30
MC-1235-SV__	M12	12	35
MC-1240-SV__	M12	12	40
MC-1245-SV__	M12	12	45
MC-1250-SV__	M12	12	50
MC-1260-SV__	M12	12	60
MC-1625-SV__	M16	16	25
MC-1630-SV__	M16	16	30
MC-1635-SV__	M16	16	35

Part Number	Size	Dia	Length
MC-1640-SV__	M16	16	40
MC-1645-SV__	M16	16	45
MC-1650-SV__	M16	16	50
MC-1660-SV__	M16	16	60



For detailed prints, tolerances, and variations
please email sales@ucomponents.com


Slot-Vented Screw, Flat Head, Phillips Drive

DIN 965A / ISO 7046 / A2 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
MF-204-SV__	M2	2	4
MF-205-SV__	M2	2	5
MF-206-SV__	M2	2	6
MF-208-SV__	M2	2	8
MF-210-SV__	M2	2	10
MF-2.504-SV__	M2.5	2.5	4
MF-2.505-SV__	M2.5	2.5	5
MF-2.506-SV__	M2.5	2.5	6
MF-2.508-SV__	M2.5	2.5	8
MF-2.510-SV__	M2.5	2.5	10
MF-305-SV__	M3	3	5
MF-306-SV__	M3	3	6
MF-308-SV__	M3	3	8
MF-310-SV__	M3	3	10
MF-312-SV__	M3	3	12
MF-316-SV__	M3	3	16
MF-406-SV__	M4	4	6
MF-408-SV__	M4	4	8
MF-410-SV__	M4	4	10
MF-412-SV__	M4	4	12
MF-416-SV__	M4	4	16
MF-420-SV__	M4	4	20
MF-425-SV__	M4	4	25
MF-508-SV__	M5	5	8
MF-510-SV__	M5	5	10
MF-512-SV__	M5	5	12
MF-516-SV__	M5	5	16
MF-520-SV__	M5	5	20
MF-525-SV__	M5	5	25
MF-530-SV__	M5	5	30
MF-610-SV__	M6	6	10
MF-612-SV__	M6	6	12
MF-616-SV__	M6	6	16
MF-620-SV__	M6	6	20
MF-625-SV__	M6	6	25



For detailed prints, tolerances, and variations
please email sales@ucomponents.com


Slot-Vented Screw, Flat Head, Socket Drive

DIN 7991 / A2 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
MFA-204-SV__	M2	2	4
MFA-205-SV__	M2	2	5
MFA-206-SV__	M2	2	6
MFA-208-SV__	M2	2	8
MFA-210-SV__	M2	2	10
MFA-2.504-SV__	M2.5	2.5	4
MFA-2.505-SV__	M2.5	2.5	5
MFA-2.506-SV__	M2.5	2.5	6
MFA-2.508-SV__	M2.5	2.5	8
MFA-2.510-SV__	M2.5	2.5	10
MFA-305-SV__	M3	3	5
MFA-306-SV__	M3	3	6
MFA-308-SV__	M3	3	8
MFA-310-SV__	M3	3	10
MFA-312-SV__	M3	3	12
MFA-316-SV__	M3	3	16
MFA-406-SV__	M4	4	6
MFA-408-SV__	M4	4	8
MFA-410-SV__	M4	4	10
MFA-412-SV__	M4	4	12
MFA-416-SV__	M4	4	16
MFA-420-SV__	M4	4	20
MFA-425-SV__	M4	4	25
MFA-508-SV__	M5	5	8
MFA-510-SV__	M5	5	10
MFA-512-SV__	M5	5	12
MFA-516-SV__	M5	5	16
MFA-520-SV__	M5	5	20
MFA-525-SV__	M5	5	25
MFA-530-SV__	M5	5	30
MFA-610-SV__	M6	6	10
MFA-612-SV__	M6	6	12
MFA-616-SV__	M6	6	16
MFA-620-SV__	M6	6	20
MFA-625-SV__	M6	6	25



For detailed prints, tolerances, and variations
please email sales@ucomponents.com


Slot-Vented Screw, Flat Head, Slotted Drive

DIN 963A / ISO 2009 / A2 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
MFS-204-SV__	M2	2	4
MFS-205-SV__	M2	2	5
MFS-206-SV__	M2	2	6
MFS-208-SV__	M2	2	8
MFS-210-SV__	M2	2	10
MFS-2.504-SV__	M2.5	2.5	4
MFS-2.505-SV__	M2.5	2.5	5
MFS-2.506-SV__	M2.5	2.5	6
MFS-2.508-SV__	M2.5	2.5	8
MFS-2.510-SV__	M2.5	2.5	10
MFS-305-SV__	M3	3	5
MFS-306-SV__	M3	3	6
MFS-308-SV__	M3	3	8
MFS-310-SV__	M3	3	10
MFS-312-SV__	M3	3	12
MFS-316-SV__	M3	3	16
MFS-406-SV__	M4	4	6
MFS-408-SV__	M4	4	8
MFS-410-SV__	M4	4	10
MFS-412-SV__	M4	4	12
MFS-416-SV__	M4	4	16
MFS-420-SV__	M4	4	20
MFS-425-SV__	M4	4	25
MFS-508-SV__	M5	5	8
MFS-510-SV__	M5	5	10
MFS-512-SV__	M5	5	12
MFS-516-SV__	M5	5	16
MFS-520-SV__	M5	5	20
MFS-525-SV__	M5	5	25
MFS-530-SV__	M5	5	30
MFS-610-SV__	M6	6	10
MFS-612-SV__	M6	6	12
MFS-616-SV__	M6	6	16
MFS-620-SV__	M6	6	20
MFS-625-SV__	M6	6	25

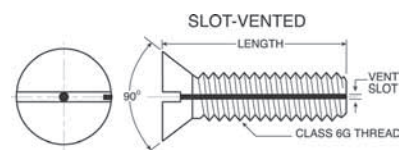

For detailed prints, tolerances, and variations
please email sales@ucomponents.com


Slot-Vented Screw, Hex Head

DIN 933 / ISO 4017 / A2 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
MH-305-SV__	M3	3	5
MH-306-SV__	M3	3	6
MH-308-SV__	M3	3	8
MH-310-SV__	M3	3	10
MH-312-SV__	M3	3	12
MH-316-SV__	M3	3	16
MH-406-SV__	M4	4	6
MH-408-SV__	M4	4	8
MH-410-SV__	M4	4	10
MH-412-SV__	M4	4	12
MH-416-SV__	M4	4	16
MH-420-SV__	M4	4	20
MH-425-SV__	M4	4	25
MH-430-SV__	M4	4	30
MH-435-SV__	M4	4	35
MH-508-SV__	M5	5	8
MH-510-SV__	M5	5	10
MH-512-SV__	M5	5	12
MH-516-SV__	M5	5	16
MH-520-SV__	M5	5	20
MH-525-SV__	M5	5	25
MH-530-SV__	M5	5	30
MH-535-SV__	M5	5	35
MH-606-SV__	M6	6	6
MH-608-SV__	M6	6	8
MH-610-SV__	M6	6	10
MH-612-SV__	M6	6	12
MH-616-SV__	M6	6	16
MH-620-SV__	M6	6	20
MH-625-SV__	M6	6	25
MH-630-SV__	M6	6	30
MH-635-SV__	M6	6	35
MH-810-SV__	M8	8	10
MH-812-SV__	M8	8	12
MH-816-SV__	M8	8	16
MH-820-SV__	M8	8	20
MH-825-SV__	M8	8	25
MH-830-SV__	M8	8	30
MH-835-SV__	M8	8	35
MH-840-SV__	M8	8	40



For detailed prints, tolerances, and variations
please email sales@ucomponents.com


Slot-Vented Screw, Set, Cup Point, Socket Drive

DIN 916 / ISO 4029 / A2 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
MT-204-SV__	M2	2	4
MT-205-SV__	M2	2	5
MT-206-SV__	M2	2	6
MT-208-SV__	M2	2	8
MT-210-SV__	M2	2	10
MT-2.504-SV__	M2.5	2.5	4
MT-2.505-SV__	M2.5	2.5	5
MT-2.506-SV__	M2.5	2.5	6
MT-2.508-SV__	M2.5	2.5	8
MT-2.510-SV__	M2.5	2.5	10
MT-305-SV__	M3	3	5
MT-306-SV__	M3	3	6
MT-308-SV__	M3	3	8
MT-310-SV__	M3	3	10
MT-312-SV__	M3	3	12
MT-316-SV__	M3	3	16
MT-406-SV__	M4	4	6
MT-408-SV__	M4	4	8
MT-410-SV__	M4	4	10
MT-412-SV__	M4	4	12
MT-416-SV__	M4	4	16
MT-420-SV__	M4	4	20
MT-425-SV__	M4	4	25
MT-508-SV__	M5	5	8
MT-510-SV__	M5	5	10
MT-512-SV__	M5	5	12
MT-516-SV__	M5	5	16
MT-520-SV__	M5	5	20
MT-525-SV__	M5	5	25
MT-530-SV__	M5	5	30
MT-610-SV__	M6	6	10
MT-612-SV__	M6	6	12
MT-616-SV__	M6	6	16
MT-620-SV__	M6	6	20
MT-625-SV__	M6	6	25



For detailed prints, tolerances, and variations
please email sales@ucomponents.com


Slot-Vented Screw, Cheese Head, Slotted Drive

DIN 84A / ISO 1207 / A2 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
MES-204-SV__	M2	2	4
MES-205-SV__	M2	2	5
MES-206-SV__	M2	2	6
MES-208-SV__	M2	2	8
MES-210-SV__	M2	2	10
MES-2.504-SV__	M2.5	2.5	4
MES-2.505-SV__	M2.5	2.5	5
MES-2.506-SV__	M2.5	2.5	6
MES-2.508-SV__	M2.5	2.5	8
MES-2.510-SV__	M2.5	2.5	10
MES-305-SV__	M3	3	5
MES-306-SV__	M3	3	6
MES-308-SV__	M3	3	8
MES-310-SV__	M3	3	10
MES-312-SV__	M3	3	12
MES-316-SV__	M3	3	16
MES-406-SV__	M4	4	6
MES-408-SV__	M4	4	8
MES-410-SV__	M4	4	10
MES-412-SV__	M4	4	12
MES-416-SV__	M4	4	16
MES-420-SV__	M4	4	20
MES-425-SV__	M4	4	25
MES-508-SV__	M5	5	8
MES-510-SV__	M5	5	10
MES-512-SV__	M5	5	12
MES-516-SV__	M5	5	16
MES-520-SV__	M5	5	20
MES-525-SV__	M5	5	25
MES-530-SV__	M5	5	30
MES-610-SV__	M6	6	10
MES-612-SV__	M6	6	12
MES-616-SV__	M6	6	16
MES-620-SV__	M6	6	20
MES-625-SV__	M6	6	25



For detailed prints, tolerances, and variations
please email sales@ucomponents.com


Slot-Vented Screw, Pan Head, Phillips Drive

DIN 7985A / ISO 7045 / A2 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
MP-204-SV__	M2	2	4
MP-205-SV__	M2	2	5
MP-206-SV__	M2	2	6
MP-208-SV__	M2	2	8
MP-210-SV__	M2	2	10
MP-2.504-SV__	M2.5	2.5	4
MP-2.505-SV__	M2.5	2.5	5
MP-2.506-SV__	M2.5	2.5	6
MP-2.508-SV__	M2.5	2.5	8
MP-2.510-SV__	M2.5	2.5	10
MP-305-SV__	M3	3	5
MP-306-SV__	M3	3	6
MP-308-SV__	M3	3	8
MP-310-SV__	M3	3	10
MP-312-SV__	M3	3	12
MP-316-SV__	M3	3	16
MP-406-SV__	M4	4	6
MP-408-SV__	M4	4	8
MP-410-SV__	M4	4	10
MP-412-SV__	M4	4	12
MP-416-SV__	M4	4	16
MP-420-SV__	M4	4	20
MP-425-SV__	M4	4	25
MP-508-SV__	M5	5	8
MP-510-SV__	M5	5	10
MP-512-SV__	M5	5	12
MP-516-SV__	M5	5	16
MP-520-SV__	M5	5	20
MP-525-SV__	M5	5	25
MP-530-SV__	M5	5	30
MP-610-SV__	M6	6	10
MP-612-SV__	M6	6	12
MP-616-SV__	M6	6	16
MP-620-SV__	M6	6	20
MP-625-SV__	M6	6	25



For detailed prints, tolerances, and variations
please email sales@ucomponents.com


Slot-Vented Screw, Pan Head, Slotted Drive

DIN 85A / ISO 1580 / A2 Stainless Steel

For selected Part Number, add Finish Suffix


Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
MPS-204-SV__	M2	2	4
MPS-205-SV__	M2	2	5
MPS-206-SV__	M2	2	6
MPS-208-SV__	M2	2	8
MPS-210-SV__	M2	2	10
MPS-2.504-SV__	M2.5	2.5	4
MPS-2.505-SV__	M2.5	2.5	5
MPS-2.506-SV__	M2.5	2.5	6
MPS-2.508-SV__	M2.5	2.5	8
MPS-2.510-SV__	M2.5	2.5	10
MPS-305-SV__	M3	3	5
MPS-306-SV__	M3	3	6
MPS-308-SV__	M3	3	8
MPS-310-SV__	M3	3	10
MPS-312-SV__	M3	3	12
MPS-316-SV__	M3	3	16
MPS-406-SV__	M4	4	6
MPS-408-SV__	M4	4	8
MPS-410-SV__	M4	4	10
MPS-412-SV__	M4	4	12
MPS-416-SV__	M4	4	16
MPS-420-SV__	M4	4	20
MPS-425-SV__	M4	4	25
MPS-508-SV__	M5	5	8
MPS-510-SV__	M5	5	10
MPS-512-SV__	M5	5	12
MPS-516-SV__	M5	5	16
MPS-520-SV__	M5	5	20
MPS-525-SV__	M5	5	25
MPS-530-SV__	M5	5	30
MPS-610-SV__	M6	6	10
MPS-612-SV__	M6	6	12
MPS-616-SV__	M6	6	16
MPS-620-SV__	M6	6	20
MPS-625-SV__	M6	6	25



For detailed prints, tolerances, and variations
please email sales@ucomponents.com

NON-VENTED SCREWS

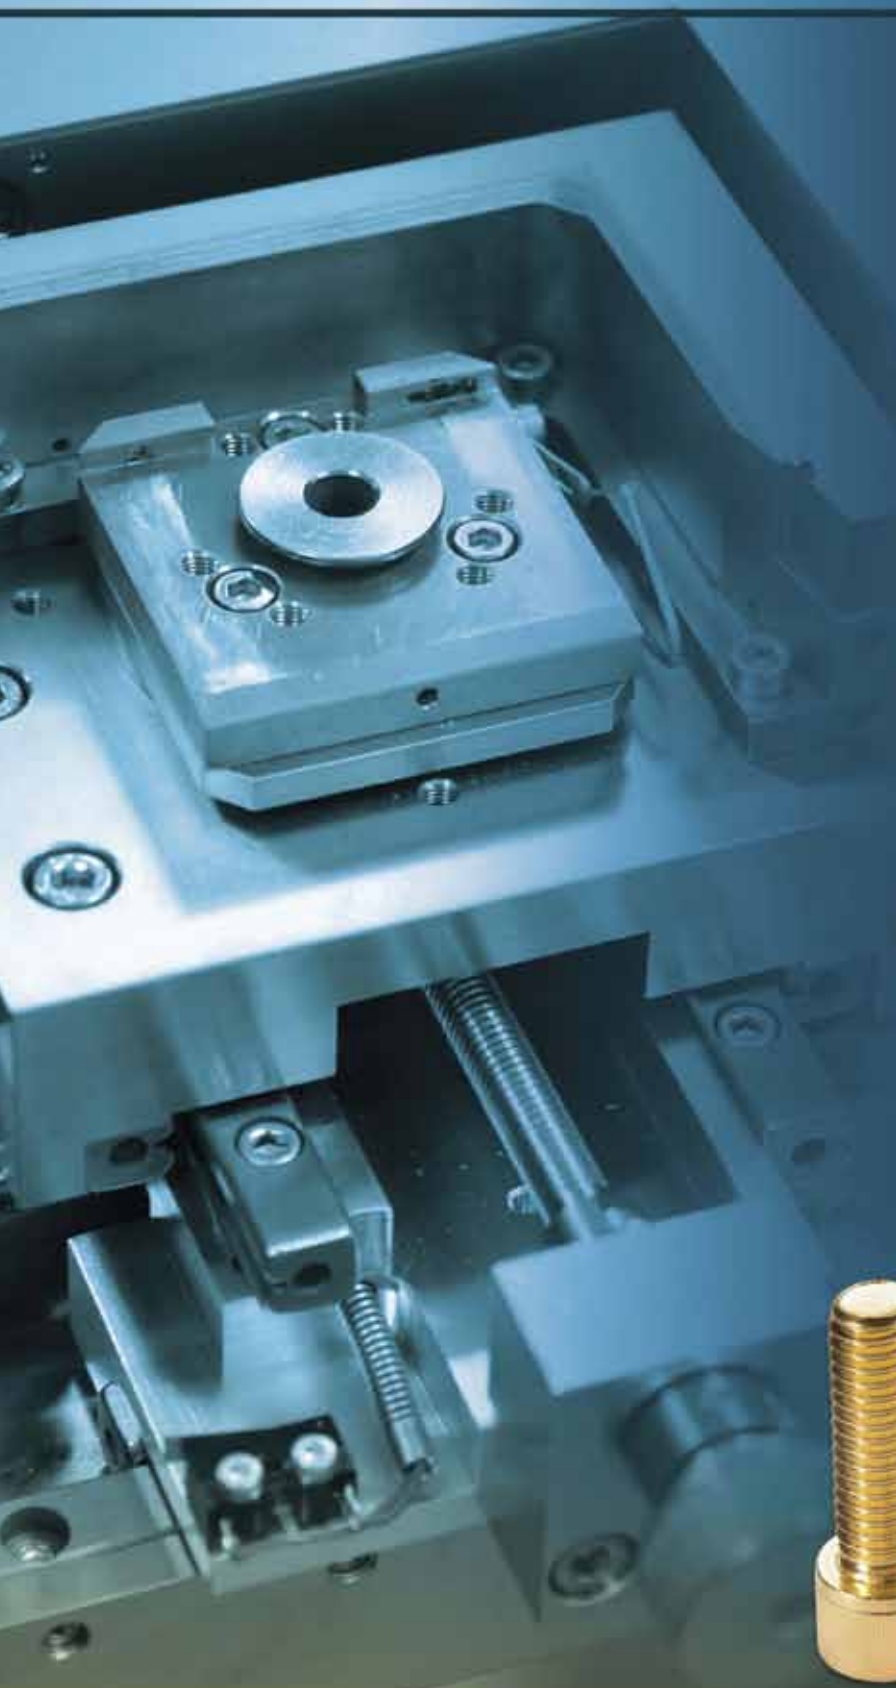

18700 Adams Ct. Morgan Hill, CA 95037
Phone: 408.782.1929 | Fax: 408.782.7995
Email: sales@ucccomponents.com
www.ucccomponents.com

METRIC


Non-Vented Screw, Button Head, Socket Drive

ISO 7380 / A2 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
MBU-204-N__	M2	2	4
MBU-205-N__	M2	2	5
MBU-206-N__	M2	2	6
MBU-208-N__	M2	2	8
MBU-210-N__	M2	2	10
MBU-2.504-N__	M2.5	2.5	4
MBU-2.505-N__	M2.5	2.5	5
MBU-2.506-N__	M2.5	2.5	6
MBU-2.508-N__	M2.5	2.5	8
MBU-2.510-N__	M2.5	2.5	10
MBU-305-N__	M3	3	5
MBU-306-N__	M3	3	6
MBU-308-N__	M3	3	8
MBU-310-N__	M3	3	10
MBU-312-N__	M3	3	12
MBU-316-N__	M3	3	16
MBU-406-N__	M4	4	6
MBU-408-N__	M4	4	8
MBU-410-N__	M4	4	10
MBU-412-N__	M4	4	12
MBU-416-N__	M4	4	16
MBU-420-N__	M4	4	20
MBU-425-N__	M4	4	25
MBU-508-N__	M5	5	8
MBU-510-N__	M5	5	10
MBU-512-N__	M5	5	12
MBU-516-N__	M5	5	16
MBU-520-N__	M5	5	20
MBU-525-N__	M5	5	25
MBU-530-N__	M5	5	30
MBU-610-N__	M6	6	10
MBU-612-N__	M6	6	12
MBU-616-N__	M6	6	16
MBU-620-N__	M6	6	20
MBU-625-N__	M6	6	25

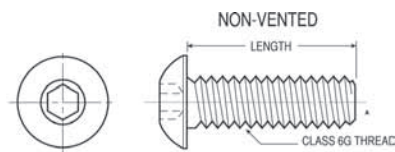

For detailed prints, tolerances, and variations
please email sales@ucomponents.com

Non-Vented Screw, Socket Head Cap


DIN 912 / ISO 4762 / A2 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
MC-204-N__	M2	2	4
MC-205-N__	M2	2	5
MC-206-N__	M2	2	6
MC-208-N__	M2	2	8
MC-210-N__	M2	2	10
MC-212-N__	M2	2	12
MC-216-N__	M2	2	16
MC-2.504-N__	M2.5	2.5	4
MC-2.505-N__	M2.5	2.5	5
MC-2.506-N__	M2.5	2.5	6
MC-2.508-N__	M2.5	2.5	8
MC-2.510-N__	M2.5	2.5	10
MC-2.512-N__	M2.5	2.5	12
MC-2.516-N__	M2.5	2.5	16
MC-2.520-N__	M2.5	2.5	20
MC-304-N__	M3	3	4
MC-305-N__	M3	3	5
MC-306-N__	M3	3	6
MC-308-N__	M3	3	8
MC-310-N__	M3	3	10
MC-312-N__	M3	3	12
MC-316-N__	M3	3	16
MC-320-N__	M3	3	20
MC-325-N__	M3	3	25
MC-330-N__	M3	3	30
MC-404-N__	M4	4	4
MC-405-N__	M4	4	5
MC-406-N__	M4	4	6
MC-408-N__	M4	4	8
MC-410-N__	M4	4	10
MC-412-N__	M4	4	12
MC-414-N__	M4	4	14
MC-416-N__	M4	4	16
MC-420-N__	M4	4	20
MC-425-N__	M4	4	25
MC-430-N__	M4	4	30
MC-435-N__	M4	4	35
MC-440-N__	M4	4	40
MC-445-N__	M4	4	45
MC-506-N__	M5	5	6
MC-508-N__	M5	5	8
MC-510-N__	M5	5	10

Part Number	Size	Dia	Length
MC-512-N__	M5	5	12
MC-516-N__	M5	5	16
MC-520-N__	M5	5	20
MC-525-N__	M5	5	25
MC-530-N__	M5	5	30
MC-535-N__	M5	5	35
MC-540-N__	M5	5	40
MC-545-N__	M5	5	45
MC-550-N__	M5	5	50



For detailed prints, tolerances, and variations
please email sales@uccomponents.com

Non-Vented Screw, Socket Head Cap


DIN 912 / ISO 4762 / A2 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
MC-608-N__	M6	6	8
MC-610-N__	M6	6	10
MC-612-N__	M6	6	12
MC-616-N__	M6	6	16
MC-620-N__	M6	6	20
MC-625-N__	M6	6	25
MC-630-N__	M6	6	30
MC-635-N__	M6	6	35
MC-640-N__	M6	6	40
MC-645-N__	M6	6	45
MC-650-N__	M6	6	50
MC-810-N__	M8	8	10
MC-812-N__	M8	8	12
MC-816-N__	M8	8	16
MC-820-N__	M8	8	20
MC-825-N__	M8	8	25
MC-830-N__	M8	8	30
MC-835-N__	M8	8	35
MC-840-N__	M8	8	40
MC-845-N__	M8	8	45
MC-850-N__	M8	8	50
MC-860-N__	M8	8	60
MC-1014-N__	M10	10	14
MC-1016-N__	M10	10	16
MC-1020-N__	M10	10	20
MC-1025-N__	M10	10	25
MC-1030-N__	M10	10	30
MC-1035-N__	M10	10	35
MC-1040-N__	M10	10	40
MC-1045-N__	M10	10	45
MC-1050-N__	M10	10	50
MC-1060-N__	M10	10	60
MC-1220-N__	M12	12	20
MC-1225-N__	M12	12	25
MC-1230-N__	M12	12	30
MC-1235-N__	M12	12	35
MC-1240-N__	M12	12	40
MC-1245-N__	M12	12	45
MC-1250-N__	M12	12	50
MC-1260-N__	M12	12	60
MC-1625-N__	M16	16	25
MC-1630-N__	M16	16	30

Part Number	Size	Dia	Length
MC-1635-N__	M16	16	35
MC-1640-N__	M16	16	40
MC-1645-N__	M16	16	45
MC-1650-N__	M16	16	50
MC-1660-N__	M16	16	60



For detailed prints, tolerances, and variations
please email sales@ucomponents.com


Non-Vented Screw, Flat Head, Phillips Drive

DIN 965A / ISO 7046 / A2 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
MF-204-N__	M2	2	4
MF-205-N__	M2	2	5
MF-206-N__	M2	2	6
MF-208-N__	M2	2	8
MF-210-N__	M2	2	10
MF-2.504-N__	M2.5	2.5	4
MF-2.505-N__	M2.5	2.5	5
MF-2.506-N__	M2.5	2.5	6
MF-2.508-N__	M2.5	2.5	8
MF-2.510-N__	M2.5	2.5	10
MF-305-N__	M3	3	5
MF-306-N__	M3	3	6
MF-308-N__	M3	3	8
MF-310-N__	M3	3	10
MF-312-N__	M3	3	12
MF-316-N__	M3	3	16
MF-406-N__	M4	4	6
MF-408-N__	M4	4	8
MF-410-N__	M4	4	10
MF-412-N__	M4	4	12
MF-416-N__	M4	4	16
MF-420-N__	M4	4	20
MF-425-N__	M4	4	25
MF-508-N__	M5	5	8
MF-510-N__	M5	5	10
MF-512-N__	M5	5	12
MF-516-N__	M5	5	16
MF-520-N__	M5	5	20
MF-525-N__	M5	5	25
MF-530-N__	M5	5	30
MF-610-N__	M6	6	10
MF-612-N__	M6	6	12
MF-616-N__	M6	6	16
MF-620-N__	M6	6	20
MF-625-N__	M6	6	25



For detailed prints, tolerances, and variations
please email sales@uccomponents.com


Non-Vented Screw, Flat Head, Socket Drive

DIN 7991 / A2 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
MFA-204-N__	M2	2	4
MFA-205-N__	M2	2	5
MFA-206-N__	M2	2	6
MFA-208-N__	M2	2	8
MFA-210-N__	M2	2	10
MFA-2.504-N__	M2.5	2.5	4
MFA-2.505-N__	M2.5	2.5	5
MFA-2.506-N__	M2.5	2.5	6
MFA-2.508-N__	M2.5	2.5	8
MFA-2.510-N__	M2.5	2.5	10
MFA-305-N__	M3	3	5
MFA-306-N__	M3	3	6
MFA-308-N__	M3	3	8
MFA-310-N__	M3	3	10
MFA-312-N__	M3	3	12
MFA-316-N__	M3	3	16
MFA-406-N__	M4	4	6
MFA-408-N__	M4	4	8
MFA-410-N__	M4	4	10
MFA-412-N__	M4	4	12
MFA-416-N__	M4	4	16
MFA-420-N__	M4	4	20
MFA-425-N__	M4	4	25
MFA-508-N__	M5	5	8
MFA-510-N__	M5	5	10
MFA-512-N__	M5	5	12
MFA-516-N__	M5	5	16
MFA-520-N__	M5	5	20
MFA-525-N__	M5	5	25
MFA-530-N__	M5	5	30
MFA-610-N__	M6	6	10
MFA-612-N__	M6	6	12
MFA-616-N__	M6	6	16
MFA-620-N__	M6	6	20
MFA-625-N__	M6	6	25



For detailed prints, tolerances, and variations
please email sales@ucomponents.com


Non-Vented Screw, Flat Head, Slotted Drive

DIN 963A / ISO 2009 / A2 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
MFS-204-N__	M2	2	4
MFS-205-N__	M2	2	5
MFS-206-N__	M2	2	6
MFS-208-N__	M2	2	8
MFS-210-N__	M2	2	10
MFS-2.504-N__	M2.5	2.5	4
MFS-2.505-N__	M2.5	2.5	5
MFS-2.506-N__	M2.5	2.5	6
MFS-2.508-N__	M2.5	2.5	8
MFS-2.510-N__	M2.5	2.5	10
MFS-305-N__	M3	3	5
MFS-306-N__	M3	3	6
MFS-308-N__	M3	3	8
MFS-310-N__	M3	3	10
MFS-312-N__	M3	3	12
MFS-316-N__	M3	3	16
MFS-406-N__	M4	4	6
MFS-408-N__	M4	4	8
MFS-410-N__	M4	4	10
MFS-412-N__	M4	4	12
MFS-416-N__	M4	4	16
MFS-420-N__	M4	4	20
MFS-425-N__	M4	4	25
MFS-508-N__	M5	5	8
MFS-510-N__	M5	5	10
MFS-512-N__	M5	5	12
MFS-516-N__	M5	5	16
MFS-520-N__	M5	5	20
MFS-525-N__	M5	5	25
MFS-530-N__	M5	5	30
MFS-610-N__	M6	6	10
MFS-612-N__	M6	6	12
MFS-616-N__	M6	6	16
MFS-620-N__	M6	6	20
MFS-625-N__	M6	6	25



For detailed prints, tolerances, and variations
please email sales@uccomponents.com


Non-Vented Screw, Hex Head

DIN 933 / ISO 4017 / A2 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
MH-305-N__	M3	3	5
MH-306-N__	M3	3	6
MH-308-N__	M3	3	8
MH-310-N__	M3	3	10
MH-312-N__	M3	3	12
MH-316-N__	M3	3	16
MH-406-N__	M4	4	6
MH-408-N__	M4	4	8
MH-410-N__	M4	4	10
MH-412-N__	M4	4	12
MH-416-N__	M4	4	16
MH-420-N__	M4	4	20
MH-425-N__	M4	4	25
MH-430-N__	M4	4	30
MH-435-N__	M4	4	35
MH-508-N__	M5	5	8
MH-510-N__	M5	5	10
MH-512-N__	M5	5	12
MH-516-N__	M5	5	16
MH-520-N__	M5	5	20
MH-525-N__	M5	5	25
MH-530-N__	M5	5	30
MH-535-N__	M5	5	35
MH-606-N__	M6	6	6
MH-608-N__	M6	6	8
MH-610-N__	M6	6	10
MH-612-N__	M6	6	12
MH-616-N__	M6	6	16
MH-620-N__	M6	6	20
MH-625-N__	M6	6	25
MH-630-N__	M6	6	30
MH-635-N__	M6	6	35
MH-810-N__	M8	8	10
MH-812-N__	M8	8	12
MH-816-N__	M8	8	16
MH-820-N__	M8	8	20
MH-825-N__	M8	8	25
MH-830-N__	M8	8	30
MH-835-N__	M8	8	35
MH-840-N__	M8	8	40



For detailed prints, tolerances, and variations
please email sales@ucomponents.com


Non-Vented Screw, Set, Cup Point, Socket Drive

DIN 916 / ISO 4029 / A2 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
MT-204-N__	M2	2	4
MT-205-N__	M2	2	5
MT-206-N__	M2	2	6
MT-208-N__	M2	2	8
MT-210-N__	M2	2	10
MT-2.504-N__	M2.5	2.5	4
MT-2.505-N__	M2.5	2.5	5
MT-2.506-N__	M2.5	2.5	6
MT-2.508-N__	M2.5	2.5	8
MT-2.510-N__	M2.5	2.5	10
MT-305-N__	M3	3	5
MT-306-N__	M3	3	6
MT-308-N__	M3	3	8
MT-310-N__	M3	3	10
MT-312-N__	M3	3	12
MT-316-N__	M3	3	16
MT-406-N__	M4	4	6
MT-408-N__	M4	4	8
MT-410-N__	M4	4	10
MT-412-N__	M4	4	12
MT-416-N__	M4	4	16
MT-420-N__	M4	4	20
MT-425-N__	M4	4	25
MT-508-N__	M5	5	8
MT-510-N__	M5	5	10
MT-512-N__	M5	5	12
MT-516-N__	M5	5	16
MT-520-N__	M5	5	20
MT-525-N__	M5	5	25
MT-530-N__	M5	5	30
MT-610-N__	M6	6	10
MT-612-N__	M6	6	12
MT-616-N__	M6	6	16
MT-620-N__	M6	6	20
MT-625-N__	M6	6	25

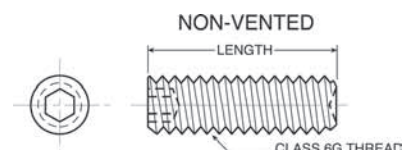

For detailed prints, tolerances, and variations
please email sales@uccomponents.com


Non-Vented Screw, Cheese Head, Slotted Drive

DIN 84A / ISO 1207 / A2 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
MES-204-N__	M2	2	4
MES-205-N__	M2	2	5
MES-206-N__	M2	2	6
MES-208-N__	M2	2	8
MES-210-N__	M2	2	10
MES-2.504-N__	M2.5	2.5	4
MES-2.505-N__	M2.5	2.5	5
MES-2.506-N__	M2.5	2.5	6
MES-2.508-N__	M2.5	2.5	8
MES-2.510-N__	M2.5	2.5	10
MES-305-N__	M3	3	5
MES-306-N__	M3	3	6
MES-308-N__	M3	3	8
MES-310-N__	M3	3	10
MES-312-N__	M3	3	12
MES-316-N__	M3	3	16
MES-406-N__	M4	4	6
MES-408-N__	M4	4	8
MES-410-N__	M4	4	10
MES-412-N__	M4	4	12
MES-416-N__	M4	4	16
MES-420-N__	M4	4	20
MES-425-N__	M4	4	25
MES-508-N__	M5	5	8
MES-510-N__	M5	5	10
MES-512-N__	M5	5	12
MES-516-N__	M5	5	16
MES-520-N__	M5	5	20
MES-525-N__	M5	5	25
MES-530-N__	M5	5	30
MES-610-N__	M6	6	10
MES-612-N__	M6	6	12
MES-616-N__	M6	6	16
MES-620-N__	M6	6	20
MES-625-N__	M6	6	25



For detailed prints, tolerances, and variations
please email sales@ucomponents.com


Non-Vented Screw, Pan Head, Phillips Drive

DIN 7985A / ISO 7045 / A2 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
MP-204-N__	M2	2	4
MP-205-N__	M2	2	5
MP-206-N__	M2	2	6
MP-208-N__	M2	2	8
MP-210-N__	M2	2	10
MP-2.504-N__	M2.5	2.5	4
MP-2.505-N__	M2.5	2.5	5
MP-2.506-N__	M2.5	2.5	6
MP-2.508-N__	M2.5	2.5	8
MP-2.510-N__	M2.5	2.5	10
MP-305-N__	M3	3	5
MP-306-N__	M3	3	6
MP-308-N__	M3	3	8
MP-310-N__	M3	3	10
MP-312-N__	M3	3	12
MP-316-N__	M3	3	16
MP-406-N__	M4	4	6
MP-408-N__	M4	4	8
MP-410-N__	M4	4	10
MP-412-N__	M4	4	12
MP-416-N__	M4	4	16
MP-420-N__	M4	4	20
MP-425-N__	M4	4	25
MP-508-N__	M5	5	8
MP-510-N__	M5	5	10
MP-512-N__	M5	5	12
MP-516-N__	M5	5	16
MP-520-N__	M5	5	20
MP-525-N__	M5	5	25
MP-530-N__	M5	5	30
MP-610-N__	M6	6	10
MP-612-N__	M6	6	12
MP-616-N__	M6	6	16
MP-620-N__	M6	6	20
MP-625-N__	M6	6	25



For detailed prints, tolerances, and variations
please email sales@ucomponents.com


Non-Vented Screw, Pan Head, Slotted Drive

DIN 85A / ISO 1580 / A2 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
MPS-204-N__	M2	2	4
MPS-205-N__	M2	2	5
MPS-206-N__	M2	2	6
MPS-208-N__	M2	2	8
MPS-210-N__	M2	2	10
MPS-2.504-N__	M2.5	2.5	4
MPS-2.505-N__	M2.5	2.5	5
MPS-2.506-N__	M2.5	2.5	6
MPS-2.508-N__	M2.5	2.5	8
MPS-2.510-N__	M2.5	2.5	10
MPS-305-N__	M3	3	5
MPS-306-N__	M3	3	6
MPS-308-N__	M3	3	8
MPS-310-N__	M3	3	10
MPS-312-N__	M3	3	12
MPS-316-N__	M3	3	16
MPS-406-N__	M4	4	6
MPS-408-N__	M4	4	8
MPS-410-N__	M4	4	10
MPS-412-N__	M4	4	12
MPS-416-N__	M4	4	16
MPS-420-N__	M4	4	20
MPS-425-N__	M4	4	25
MPS-508-N__	M5	5	8
MPS-510-N__	M5	5	10
MPS-512-N__	M5	5	12
MPS-516-N__	M5	5	16
MPS-520-N__	M5	5	20
MPS-525-N__	M5	5	25
MPS-530-N__	M5	5	30
MPS-610-N__	M6	6	10
MPS-612-N__	M6	6	12
MPS-616-N__	M6	6	16
MPS-620-N__	M6	6	20
MPS-625-N__	M6	6	25




For detailed prints, tolerances, and variations
please email sales@ucomponents.com

Non-Vented Screw, Flange, Twelve Point Head A2 Stainless Steel

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Dia	Length
MTWP-620-N__	M6	6	20
MTWP-625-N__	M6	6	25
MTWP-630-N__	M6	6	30
MTWP-632-N__	M6	6	32
MTWP-828-N__	M8	8	28
MTWP-830-N__	M8	8	30
MTWP-835-N__	M8	8	35
MTWP-840-N__	M8	8	40
MTWP-853-N__	M8	8	53
MTWP-858-N__	M8	8	58
MTWP-864-N__	M8	8	64



For detailed prints, tolerances, and variations
please email sales@uccomponents.com



NON-VENTED NUTS



18700 Adams Ct. Morgan Hill, CA 95037
Phone: 408.782.1929 | Fax: 408.782.7995
Email: sales@ucccomponents.com
www.ucccomponents.com

METRIC

Non-Vented Nut, Hex


DIN 934 / ISO 4032 / A2 SST

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	Width Flats (min)	Width Corners (min)	Thick. (min)
MN-204-__	M2	4	4.32	1.35
MN-2.5045-__	M2.5	5	5.45	1.75
MN-305-__	M3	5.5	6.01	2.15
MN-407-__	M4	7	7.66	2.9
MN-508-__	M5	8	8.79	3.7
MN-610-__	M6	10	11.05	4.7
MN-8125-__	M8	13	14.38	6.14
MN-1015-__	M10	17	18.9	7.64
MN-12175-__	M12	19	21.1	9.64

HEX NUTS
METRIC STANDARD - DIN 934
ISO 4032



For detailed prints, tolerances, and variations
please email sales@ucomponents.com

NON-VENTED WASHERS




18700 Adams Ct. Morgan Hill, CA 95037
Phone: 408.782.1929 | Fax: 408.782.7995
Email: sales@ucccomponents.com
www.ucccomponents.com

METRIC

For selected Part Number, add Finish Suffix

Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	ID	OD	Thickness
MFW-02-__	M2	2.2	5	0.3
MFW-02.5-__	M2.5	2.7	6	0.5
MFW-03-__	M3	3.2	7	0.5
MFW-04-__	M4	4.3	9	0.8
MFW-05-__	M5	5.3	10	1
MFW-06-__	M6	6.4	12	1.6
MFW-08-__	M8	8.4	16	1.6
MFW-10-__	M10	10.5	20	2
MFW-12-__	M12	13	24	2.5



For detailed prints, tolerances, and variations
please email sales@ucomponents.com


Washer, Split Lock

DIN 127B / A2 SST

For selected Part Number, add Finish Suffix


Precision Cleaned (No-suffix)	Silver plated -A	Gold plated -AU	Nickel plated -K	MoS2 coated -C	WS2 coated -W	Electro Polished -EP
----------------------------------	---------------------	--------------------	---------------------	-------------------	------------------	-------------------------

Part Number	Size	ID	OD	Thickness
MLW-02-__	M2	2.1	4.4	0.5
MLW-02.5-__	M2.5	2.6	5.1	0.6
MLW-03-__	M3	3.1	6.2	0.8
MLW-04-__	M4	4.1	7.6	0.9
MLW-05-__	M5	5.1	9.2	1.2
MLW-06-__	M6	6.1	11.8	1.6
MLW-08-__	M8	8.1	14.8	2
MLW-10-__	M10	10.2	18.1	2.2
MLW-12-__	M12	12.2	21.1	2.5



For detailed prints, tolerances, and variations
please email sales@ucomponents.com

VENTED WASHERS

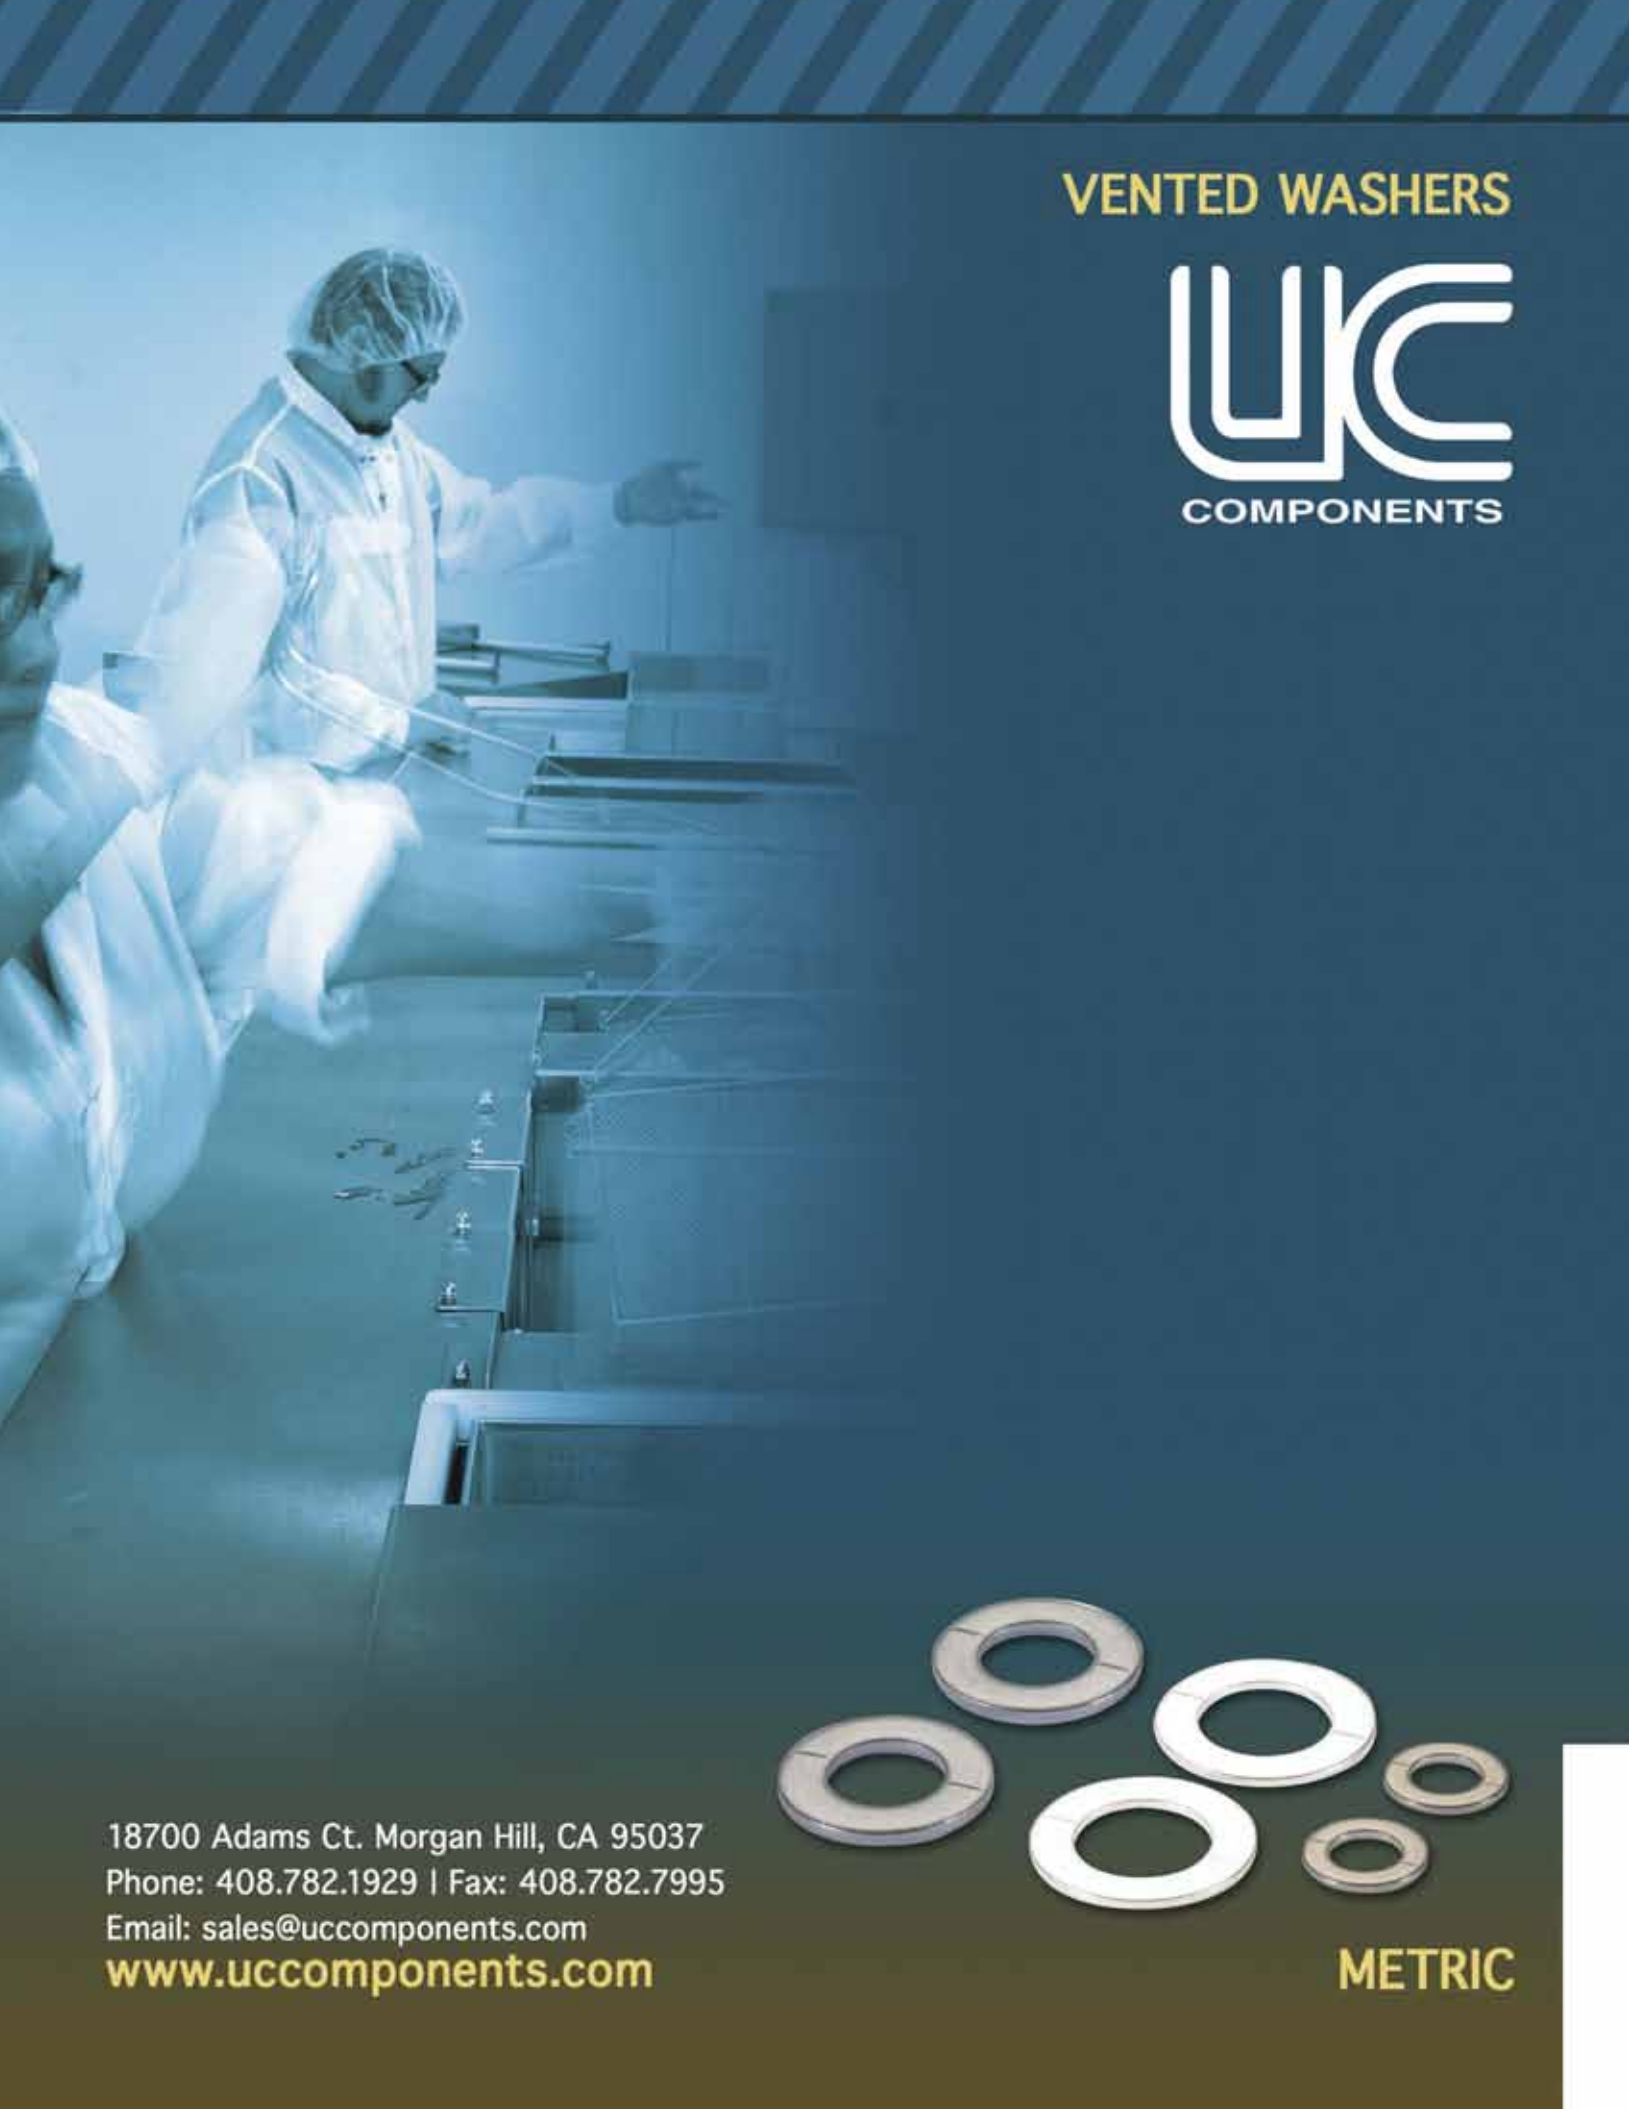

18700 Adams Ct. Morgan Hill, CA 95037
Phone: 408.782.1929 | Fax: 408.782.7995
Email: sales@ucccomponents.com
www.ucccomponents.com

METRIC

For selected Part Number, add Finish Suffix

 Precision Cleaned
(No-suffix)

 Silver plated
-A

 Gold plated
-AU


 Nickel plated
-K

 MoS2 coated
-C

 WS2 coated
-W

 Electro Polished
-EP

Part Number	Size	ID	OD	Thickness
MFWV-02-__	M2	2.2	5	0.3
MFWV-02.5-__	M2.5	2.7	6	0.5
MFWV-03-__	M3	3.2	7	0.5
MFWV-04-__	M4	4.3	9	0.8
MFWV-05-__	M5	5.3	10	1
MFWV-06-__	M6	6.4	12	1.6
MFWV-08-__	M8	8.4	16	1.6
MFWV-10-__	M10	10.5	20	2
MFWV-12-__	M12	13	24	2.5


VENTED FLAT WASHER


For detailed prints, tolerances, and variations
please email sales@uccomponents.com

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.